



Technical Sheet

Contactless Bi-Level VersaCooler® II with Contactless VersaFiller

- PG8EBFSLTT
- PGEBSLTT

Suggested Specification

Model PG8EBFSLTT shall deliver 8.0 gph of 50°F water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Model PGEBSLTT is a non-refrigerated drinking fountain and delivers ambient water. Shall include the VersaFiller sports bottle filler with contactless activation. Each fountain shall have independent activation using contactless infrared sensor to activate the flow of water. Contactless VersaFiller components contain Freshield®, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew. Basin shall be designed to eliminate splashing and standing water. Water saver bubbler to reduce waste water by 50% and shall have flexible guard and operate between 20 and 100 PSI. Cabinet finish shall be brushed stainless steel or greystone on galvanized steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

Models

- PG8EBFSLTT with contactless sensor delivers 8.0 gallons of chilled drinking water per hour.
- PGEBSLTT with contactless sensor is a non-refrigerated fountain.

Standard Features

- Waterways are Lead-Free in materials & construction
- Flexible one-piece water saver bubbler guard infused with silver based antimicrobial additive
- Stainless steel top and heavy duty galvanized steel frame
- High efficiency cooling system and refrigerant R-134a
- Contactless infrared sensor activation on each fountain operate independently of each other
- External stream height adjustment on each fountain
- Contactless VersaFiller
- Built in filter monitor and bottle counter
- External cold control adjustment on model PG8EBFSLTT

Finishes

- Standard cabinet finish: Greystone powder coated paint on galvanized steel
- Optional finishes: Sandstone powder coated paint; Stainless steel (at additional cost)

Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation.



Options

- One piece chrome plated brass bubbler (036700-001)
- VersaFilter

Limited 5-Year Warranty

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These waters coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed



WARNING:
Cancer and Reproductive Harm
www.P65Warnings.ca.gov




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot 'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PG8EBFSLTT	8.0	8.0	No	No	1/4	4.6	460	No	Yes	109 Lbs
PGEBSLTT	Fountain Only					.20	11	No	Yes	78 Lbs

*Industry standard rating condition 80° F inlet water temperature

Specifications subject to change without notice

OASIS® CONTACTLESS VERSACOOLERS® II WITH VERSAFILLER

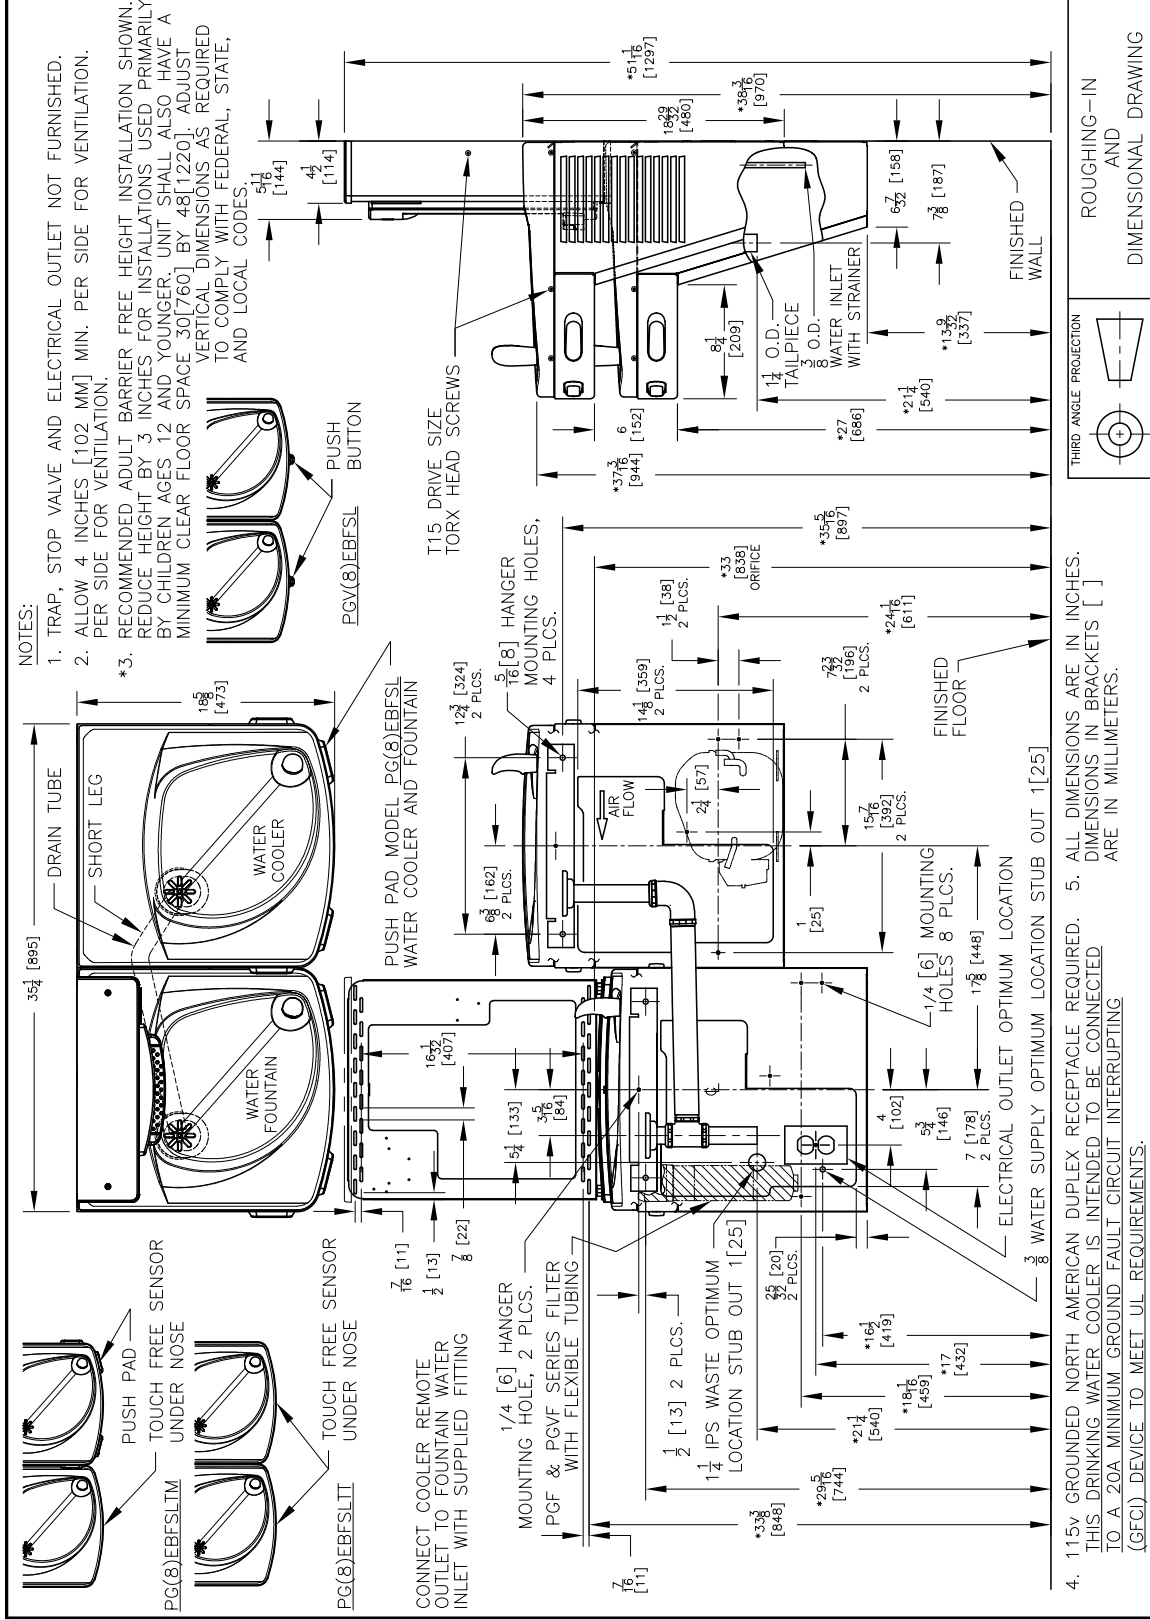

OASIS INTERNATIONAL
 222 East Campus View Blvd.
 Columbus, OH 43235

OASIS is a registered trademark of LVD Acquisition, LLC dba OASIS International, © 2020 LVD Acquisition AS0059-F-2004

www.oasiscoolers.com
1-800-646-2747