



One Green Filter
4200 114th Terrace N.
Clearwater, FL 33762
727-222-1800
onegreenfilter.com

CB1CLMSR6 FILTER CARTRIDGE

DELIVERING SUPERIOR WATER QUALITY
FOR A MULTITUDE OF FOODSERVICE
APPLICATIONS.



► FEATURES AND BENEFITS

Reduces chloramine, chlorine taste, odor and other harmful contaminants.

Sanitary cartridge replacement is simple, quick and clean; internal filter parts are never exposed to handling or contamination.

Protects foodservice equipment from break downs due to hard scale and chloramine.

Integrated beaded phosphate for scale inhibition.

Reduces dirt, particles and health contaminants.

► INSTALLATION TIPS

Install vertically with cartridge hanging down.

Allow 2.5" (6.35 cm) clearance below the cartridge for easy cartridge replacement.

Flush cartridge by running water through filter for five (5) minutes at full flow.

► OPERATION TIPS

Change cartridge(s) on a regular six (6) month preventative maintenance program.

Change cartridge(s) when capacity is reached or when pressure falls below 10 psi (0.7 bar).

Always flush the filter cartridge at time of installation and/or cartridge change.

► SPECIFICATIONS


SERVICE FLOW RATE Maximum 1.7 gpm (6.43 lpm)	TEMPERATURE 35 - 100°F (2 - 38°C)
RATED CAPACITY 3,900 gallons (14,763 L)	OVERALL DIMENSIONS 17" L x 3.25" D (43.18 cm x 8.26 cm)
PRESSURE REQUIREMENTS 30 - 125 psi (2.0 - 8.6 bar)	
CONTAMINANTS REDUCED Chlorine Chloramine Scale	

One Green Filter
4200 114th Terrace N.
Clearwater, FL 33762
727-222-1800
onegreenfilter.com



CB1CLMSR6
FILTER CARTRIDGE

DELIVERING SUPERIOR WATER QUALITY
FOR A MULTITUDE OF FOODSERVICE
APPLICATIONS.

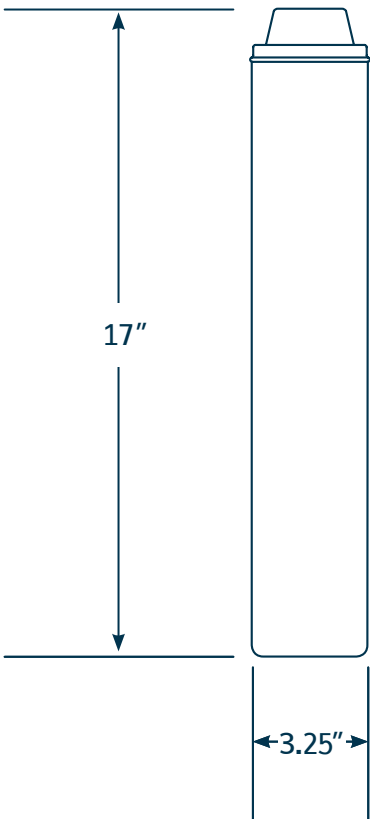

WARRANTY

One Green Filter water treatment systems (excluding replacement cartridges) are covered by a limited warranty against defects, material and workmanship for a period of 1 year after the date of purchase. See printed warranty for details. One Green Filter will provide a copy of the warranty upon request.

All One Green Filter trademarks and logos are owned by One Green Filter. All other brand or product names are trademarks or registered marks of their respective owners.

SPECIFICATIONS	
SERVICE FLOW RATE Maximum 1.7 gpm (6.32 lpm)	TEMPERATURE 35 - 100°F (2 - 38°C)
RATED CAPACITY 3,900 gallons (14,763 L)	OVERALL DIMENSIONS 17" L x 3.25" D (43.18 cm x 8.26 cm)
PRESSURE REQUIREMENTS 30 - 125 psi (2.0 - 8.6 bar)	
CONTAMINANTS REDUCED Chlorine Chloramine Scale	