


## 16, 20, & 24 - TAR ~ Tank Adapter Ring

Septic tanks are available in many types of materials. Plastic and Concrete are the most common. The TAR needs to be assembled as shown below and pressed firmly to the smooth, flat septic tank surface and fastened with stainless steel screws.



BUTYL

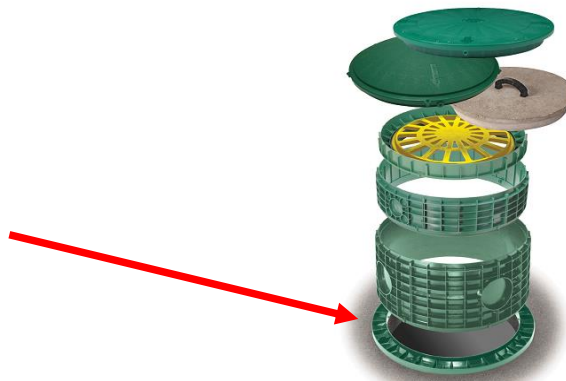

Apply the butyl to the  
BOTTOM of the TAR



Firmly press the butyl to the  
TAR to form a full ring.



Form a second full ring of butyl. Flip the TAR over and press it firmly to the septic tank surface. Install stainless steel fasteners to hold TAR in place. (Not shown)  
Butyl should be minimum 3/8", butyl ends should be kneaded together