


# Hydrocomponents and Technologies, Inc.

## VESSELS & ACCESSORIES PVC U-Pin Vessels 220 PSI

### Features

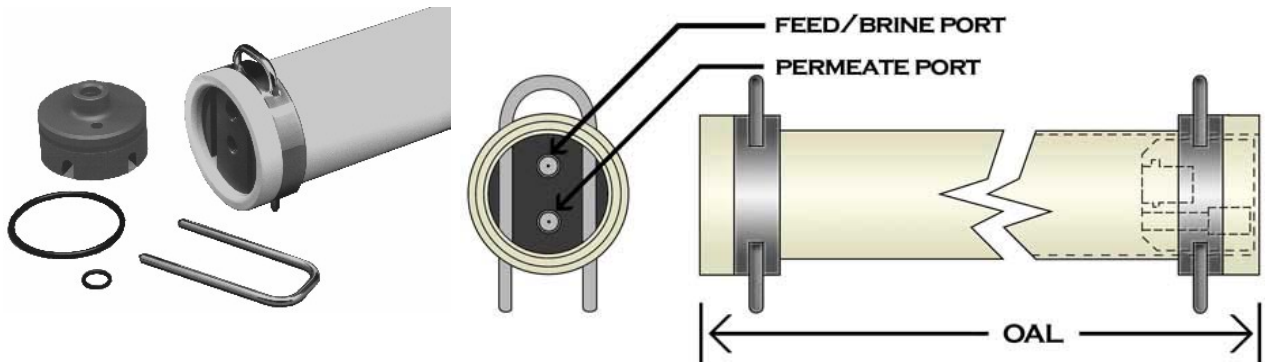

<b>2000.2 Series</b>	<b>2.0" internal diameter</b>	<b>225 PSI Work Pressure</b>
<b>2500.2 Series</b>	<b>2.5" internal diameter</b>	<b>225 PSI Work Pressure</b>
<b>4000.2S Series</b>	<b>4.0" internal diameter</b>	<b>225 PSI Work Pressure</b>

- Ethylene propylene FDA approved "O" rings.
- White PVC housing, NSF approved.
- Sturdy PVC collars.
- SS reinforcing rings on 4002.S series
- Self-locking 304 stainless steel U-Pin retaining devices for easy installation.
- Universal style models also manufactured to fit membrane of your choice.
- Flush mount easy aligning PVC end plugs make fitting installation effortless.
- Maximum separation between permeate port and feed/concentrate port allow the use of large fittings.
- 2.0" standard sizes include 13" and 26".
- 2.5" and 4" standard sizes include 14", 21", 40" and 80".
- Other lengths available upon request.

# Hydrocomponents and Technologies, Inc.

## VESSELS & ACCESSORIES PVC U-Pin Vessels 220 PSI

VESSEL SERIES #	VESSEL NOMINAL ID in.	WORK (PSI)	MODEL #	MEM. SIZE	# OF MEM.	OAL IN.	PORT SIZES (NPT)		
							FEED	BRINE	PERM.
<b>2500P</b>	<b>2.5"</b>	<b>225 PSI</b>	<b>2514P</b>	<b>2.5"x14"</b>	<b>1</b>	<b>16.5</b>	<b>1/4</b>	<b>1/4</b>	<b>1/4</b>
			2521P	2.5"x21"	1	23.5	1/4	1/4	1/4
			2526P	2.5"x26"	1	28.5	1/4	1/4	1/4
			2540P	2.5"x40"	1	42.5	1/4	1/4	1/4
<b>4000.2 S</b>	<b>4.0"</b>	<b>225 PSI</b>	<b>4014.2 S</b>	<b>4.0"x14"</b>	<b>1</b>	<b>17.5</b>	<b>1/2</b>	<b>1/2</b>	<b>1/2</b>
			4021.2 S	4.0"x21"	1	24.5	1/2	1/2	1/2
			4026.2 S	4.0"x40"	1	29.5	1/2	1/2	1/2
			4040.2 S	4.0"x40"	1	43.5	1/2	1/2	1/2
			4080.2 S	4.0"x40"	2	83.5	1/2	1/2	1/2
			*U4040.2 S	4.0"x40"	1	46.0	1/2	1/2	1/2
			*U4080.2 S	4.0"x40"	2	86.0	1/2	1/2	1/2
			*U40120.2 S	4.0"x40"	3	126.0	1/2	1/2	1/2
			*U40160.2 S	4.0"x40"	4	166.0	1/2	1/2	1/2
*U40200.2 S	4.0"x40"	5	206.0	1/2	1/2	1/2			