

High Temp Standard Filter Housings




neoPure High Temperature Standard Filter Housings are manufactured of a Glass Reinforced Nylon. Available with 3/4 NPT ports. Housings are available in 10" and 20" lengths and will accommodate a wide range of 2-1/2" to 2-7/8" diameter cartridges.

High Temperature housings can withstand temperatures up to 165F and are a great for many residential, commercial, and industrial applications.

PRODUCT SPECIFICATIONS



Max Temperature
165°F (74°C)



Max Pressure
125 psi (8.6 bar)*




Materials of Construction

Cap: Glass Reinforced Nylon
Sump: Glass Reinforced Nylon
O-Ring: Viton

*Temperature ratings vary and depend on pressure and time under load

APPLICATIONS

- Reverse Osmosis
- Food & Beverage
- Residential Plumbing
- Hot Water Filtration
- Warewashing
- Recirculation Systems

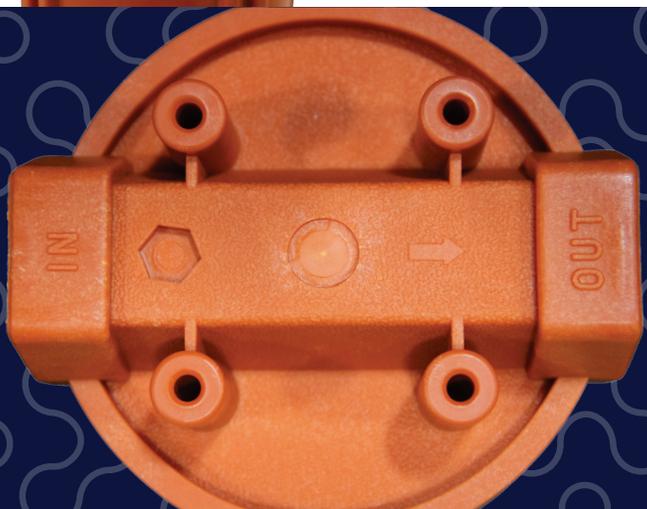

High Temp Standard Filter Housings

PRODUCT

Part Number	Description	Port NPT	Case Qty
10" Housing FHHST-1034RRRO	Standard Rib Cap High Temperature Red Cap/Red Sump	3/4"	12
20" Housing FHHST-2034RRRO	Standard Rib Cap Hight Temperature Red Cap/Red Sump	3/4"	8

ACCESSORIES


The filter housing is just one of the items needed to create a solid filtration solution. We have all of the pieces and parts you need to successfully filter unwanted debris, chemicals, tastes and odors from your water supply. Be sure and get what you need right here at freshwatersystems.com



- Tubing
- Housing Wrench
- Brackets & Screws
- Fittings

PART NUMBER MATRIX


Housing Style:	Standard	Cap Style:	R = Rib
Filter Size:	10 = 10"	Cap Color:	R = Red
	20 = 20"	Sump Color:	R = Red
Port Size:	34 = 3/4"	Pressure Release:	0 = No 1 = Yes

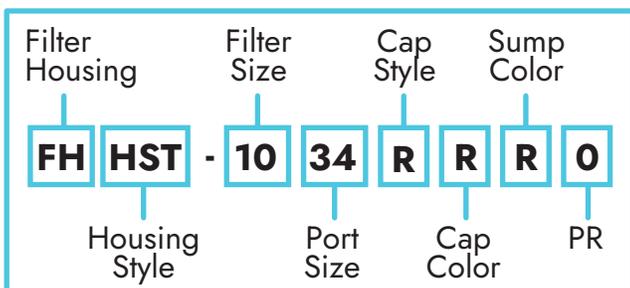

DIMENSIONS

10"
A - 5.5"
B - 13.75"

20"
A - 5.5"
B - 22.5"

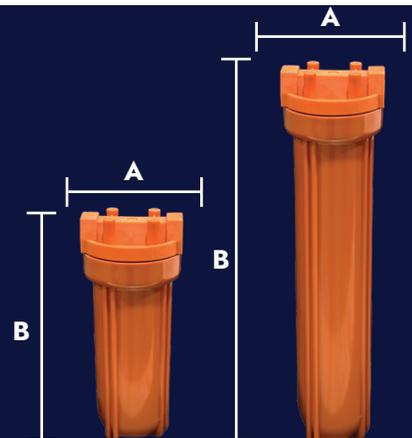

QUESTIONS?

Ask our Service Representatives at:
888.859.1188 Mon. - Fri. 8a - 8p, Sat 8:30a - 4:30p EST.
Neologic Inc. | Greenville SC | Salt Lake City UT | Houston TX