



EVERPURE

1500/2500/3500 WATER FILTERS

SELECTING A LOCATION

1. Provide a solid mount for the head.
2. Allow minimum clearance of 2½" (6.5 cm) under the cartridge so that it can be lowered for removal.
3. Allow space for the inlet and outlet water line connections.

MOUNT ONLY IN A VERTICAL POSITION!

OPERATING SPECIFICATIONS

Working Pressure Range: 10 psi (0.7 bar) - 125 psi (8.6 bar), non-shock

Temperature: 35-100° F (2-38° C)

Flow Rate: 0.5 gpm (1.89 Lpm)

For Cold Water use only.

1500/2500/3500 Drinking Water System Capacity:

Model 1500, using 1500 replacement cartridge: Capacity: 750 gal. (2,839 L)

Model 2500, using 2500 replacement cartridge: Capacity: 1,500 gal. (5,677 L)

Model 3500, using 3500 replacement cartridge: Capacity: 300 gal. (1,136 L)

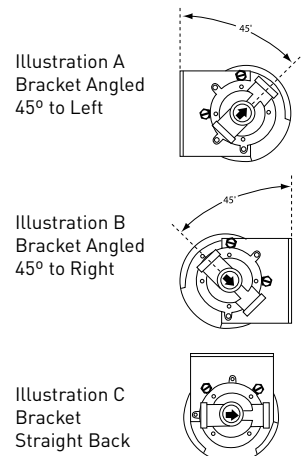
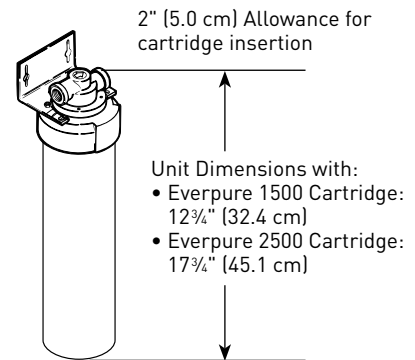
Notes

All Everpure® Drinking Water Systems must be maintained according to the manufacturer's instructions, including the timely replacement of the filter cartridges. Check for compliance with state and local laws and regulations. For service and replacement parts, contact an authorized Everpure distributor or the Everpure factory.






Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.

INSTALLATION

1. Before installing the system, determine the bracket position from the illustrations to the right, best suited to accommodate the inlet and outlet water line connections.
2. Using the bracket as template, mark and set the provided bracket mounting screws and star washers (or bolts if preferred).
3. Install 1/4" compression fitting into the head. Take care not to cross-thread the fittings. Be sure to use plumbers tape or a good quality pipe joint compound on the fitting threads.
4. Bring the inlet and outlet tubing to the head fittings and attach. Double check the connections to be sure water will follow the direction-of-flow arrow on top of the head; water supply to the inlet fitting and your faucet to the outlet fitting.
5. Install a cartridge following the instructions on back page.

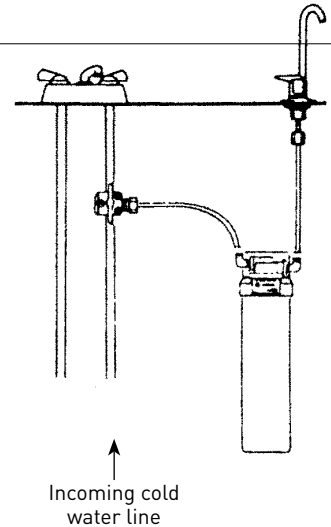


CARTRIDGE CHANGE PROCEDURE

				
<p>1. Removal-Shut off water supply. Open serviced faucet to relieve pressure.</p> <p>Turn cartridge to left (clockwise) as far as possible, approx. 1/4 turn.</p>	<p>2. Holding head firmly, pull cartridge downward and out of head.</p>	<p>3. Replacement-Align a cartridge lug with head label.</p> <p>Holding head firmly, press cartridge fully up into head.</p>	<p>4. Turn cartridge to right (counterclockwise) as far as possible.</p> <p>Turn water back on. Allow filtered water to run three minutes.</p> <p>Note installation date in space provided on cartridge.</p>	<p>5. START-UP INFORMATION-Run water through faucet for three minutes to precoat and purge cartridge of air. Turn on water. Turn on power to equipment.</p>

GUIDE FOR SEPARATE FAUCET INSTALLATION

If Separate Faucet Kit is used for your installation, follow the instructions provided with the kit. If not, refer to the typical installation (shown on the right and the reverse side of this guide) to assist in determining the parts and fittings required for your installation. Note that inlet and outlet compression fittings accommodate 1/4" soft plastic tubing. For copper and hard plastic tubing installations, use nuts with metal grippers.



System Tested and Certified by NSF International against NSF/ANSI Standards 42 and 53 for the reduction of:

STANDARD NO. 42 —
AESTHETIC EFFECTS

Chemical Reduction
Taste and Odor
Chlorine

Mechanical Filtration
Nominal Particulate Class I

STANDARD NO. 53 —
HEALTH EFFECTS

Mechanical Filtration
Cyst
Asbestos (1500 only)
VOC (3500 only)
Lead (3500 only)

For Everpure Product Warranties visit: } www.everpure.com
 Everpure para las garantías de los productos visite: }
 Pour Everpure garanties produit visitez le site: }



WATER QUALITY SYSTEMS

5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209

P: 262.238.4400 | RESIDENTIAL.EVERPURE.COM | CUSTOMER CARE: 800.279.9404 | tech-support@pentair.com

® All Pentair trademarks and logos are owned by Pentair plc or its affiliates. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

EV306944 REV K AP17 © 2017 Pentair Residential Filtration, LLC. All rights reserved.