

Application

- Coffee/Hot Tea Equipment

Water Filtration Systems

Spec No. _____

Quantity _____



CFS717

Rated for 1,500 gallons at 0.5 gpm
(Rated for 5,678 liters at 1.9 lpm)

Product Features

- ◆ 1/4" NPT inlet and outlet allows for easy connections to existing piping.
- ◆ Compact in-line design provides convenient point-of-use filtration in tight space applications.
- ◆ Pressure tested, high impact rigid polypropylene construction allows the cartridge to handle stressful conditions.
- ◆ FDA CFR-21 and/or NSF compliant materials provides peace of mind that this product is suitable for potable applications.

The CFS717 water filtration system is designed to maintain hot beverage clarity, consistency and full flavor as well as maintaining efficient brewing machine operations. Premium activated carbon reduces chlorine taste and odor and bitterness associated with poor water quality. Built-in scale inhibition reduces the ability of calcium and magnesium to precipitate on the brew equipment heating coils and boilers as hard scale.

Product Specifications

Model Number	Part Number	Reduction Claims	System Flow Rate	Capacity	Micron Rating	Application	Replacement Cartridge	Qty
CFS717	55602-01	Sediment, Chlorine, Scale	0.5 gpm (1.9 lpm)	1,500 gal. (5,678 lit.)	5	High Turbidity	CFS717	1



Visit www.nsf.org for the claims associated with products that are NSF listed.



Water Filter Systems
Foodservice

CFS717 Water Filtration System

Spec No. _____
 Quantity _____
 Model Number _____
 Part Number _____


Physical Specifications:

- System to be a single vessel.
- System inlet and outlet plumbing connections to be horizontal 1/4" NPT with 1/4" flared connections (included).
- System to be manufactured from FDA CFR-21 and/or NSF compliant materials.
- System to carry an NSF Performance Data Sheet*.
- System to be non-activation type.
- System to contain granular activated carbon.
- System to have built-in time released scale inhibitor.
- System to be sanitary in design, requiring no contact with the media during filter change-out.
- System to have maximum operating pressure of 125 psi (862 kPa) and operating temperature of 100°F (38°C).
- System to have 5 micron nominal particle reduction capacity.
- System to reduce chlorine taste and odor for 1,500 gallons (5,678 liters).
- System to have a service flow rate of 0.5 gpm (1.9 lpm).

* For NSF listed products.

Installation Tips:

- Shut off downstream equipment prior to installation of the system.
- Do not exceed operating parameters for temperature or pressure.
- Do not install outdoors.
- For cold water use only.
- For commercial use only.

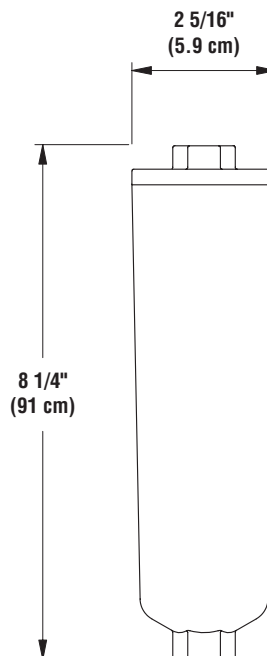

Product Options

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

CUNO Incorporated recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold.

Model Number	Part Number	Reduction Claims	Micron Rating	Capacity gal. (lit.)	Flow Rate	Application	Sizing
CFS717LS	55601-01	Sediment, Chlorine	5	1,500 (5,678)	0.5 gpm (1.9 lpm)	Cold Beverages	Single Carbonator Low Volume

Limited 5 Year Warranty

CUNO Incorporated warrants to the original purchaser-consumer that this product is free from defects in materials and workmanship. This warranty, together with any and all warranties implied by law, shall be limited to a period of five (5) years from the date of original purchase by the consumer. This warranty does not apply to failures that result from abuse, misuse, alteration or damage not caused by CUNO. This warranty is subject to exclusions and limitations. Please refer to the Warranty Card provided with the product for details.

Service Worldwide

China
 CUNO Filtration Shanghai Co. Ltd.
 No. 2 Plant East Side
 Xin Miao San Road
 XinQiao Town SongJiang District
 Shanghai, China 201612

Australia
 CUNO Pacific Pty Ltd.
 140 Sunnholt Road
 Blacktown, N.S.W. 2148
 Australia

Europe
 CUNO Limited
 21 Woking Business Park
 Albert Drive
 Woking, Surrey
 GU21 5JY, England



Japan
 CUNO K.K.
 Hodogaya Station Building 6F
 1-7, Iwai-Cho, Hodogaya-Ku
 Yokohama 240-0023, Japan

Brazil
 CUNO Latina Ltda
 Rua AMF do Brazil - 251
 18120 Mairinque-SP, Brazil

Singapore
 CUNO Filtration Asia Pte Ltd
 18 Tuas Link 1
 3rd Floor
 Singapore 638599

CUNO Incorporated
 400 Research Parkway
 Meriden, CT 06450, USA
 Toll Free: 1-888-218-CUNO
 Worldwide: 203-237-5541
 Fax: 203-238-8701