


SANITRON®

ULTRAVIOLET WATER PURIFIERS



Model S2400C
40 GPM

ATLANTIC  ULTRAVIOLET
CORPORATION®

SINCE 1963

ABOUT US

Since 1963, Atlantic Ultraviolet Corporation® has pioneered the discovery and development of beneficial uses of ultraviolet energy. Over the years, these efforts have led to the development of valuable, cost effective, and environmentally sound techniques and products now known and respected throughout the world.

The UV Application Specialists at Atlantic Ultraviolet Corporation® assist customers in the selection of germicidal lamps and equipment. Their specialized knowledge is a valuable resource in formulating effective and cost-conscious ultraviolet solutions. Extensive inventories and a dedicated staff enable Atlantic Ultraviolet Corporation® to fulfill its commitment to provide fast deliveries and responsive customer service.



GERMICIDAL ULTRAVIOLET


Ultraviolet water purification is a unique and rapid method of water disinfection without the use of heat or chemicals.

SANITRON® Ultraviolet Purifiers utilize germicidal ultraviolet lamps that produce short wave radiation lethal to bacteria, viruses and other microorganisms present in water.

Through the years ultraviolet technology has become well established as a method of choice for effective and economical water disinfection.

SANITRON® Ultraviolet Water Purifiers are the ideal solution for an ever growing range of water treatment applications.

Atlantic Ultraviolet Corporation® equipment and systems are manufactured in the USA.

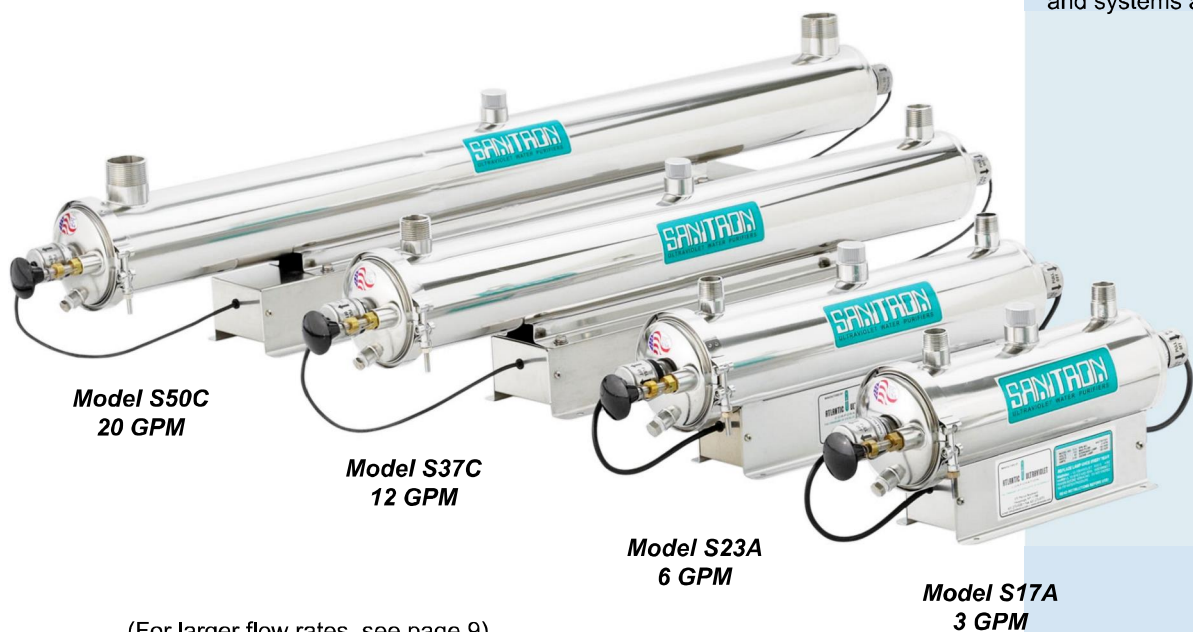

ADVANTAGES

Effective

Virtually all microorganisms are susceptible to **SANITRON®** ultraviolet disinfection

Economical

Hundreds of gallons are purified for each penny of operating cost

Safe

No danger of overdosing, no addition of chemicals

Fast

Water is ready for use as soon as it leaves the purifier – no further contact time required

Easy

Simple installation and maintenance—
Compact units require minimum space

Automatic

Provides continuous disinfection without special attention or measurement


Chemical Free

No chlorine taste or corrosion problems

Versatile


Capacities available from 3 to 416 gallons per minute (GPM)

PRINCIPLE OF OPERATION

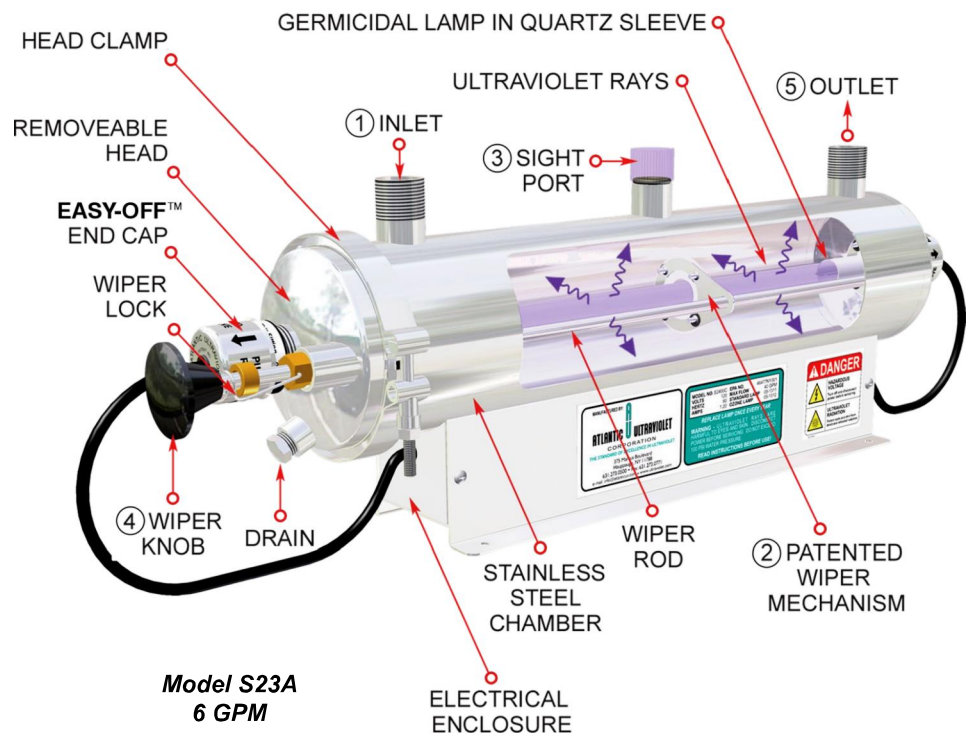

- ① The water enters the purifier and flows into the annular space between the quartz sleeve and the chamber wall.
- ② The wiper segments induce turbulence in the flowing liquid to assure uniform exposure of suspended microorganisms to the lethal ultraviolet rays.
- ③ Translucent sight port provides positive indication of germicidal lamp operation.
- ④ The wiper assembly facilitates periodic cleaning of the quartz sleeve without any disassembly or interruption of purifier operation.
- ⑤ Water leaving the purifier is instantly ready for use.

SPECIAL FEATURES

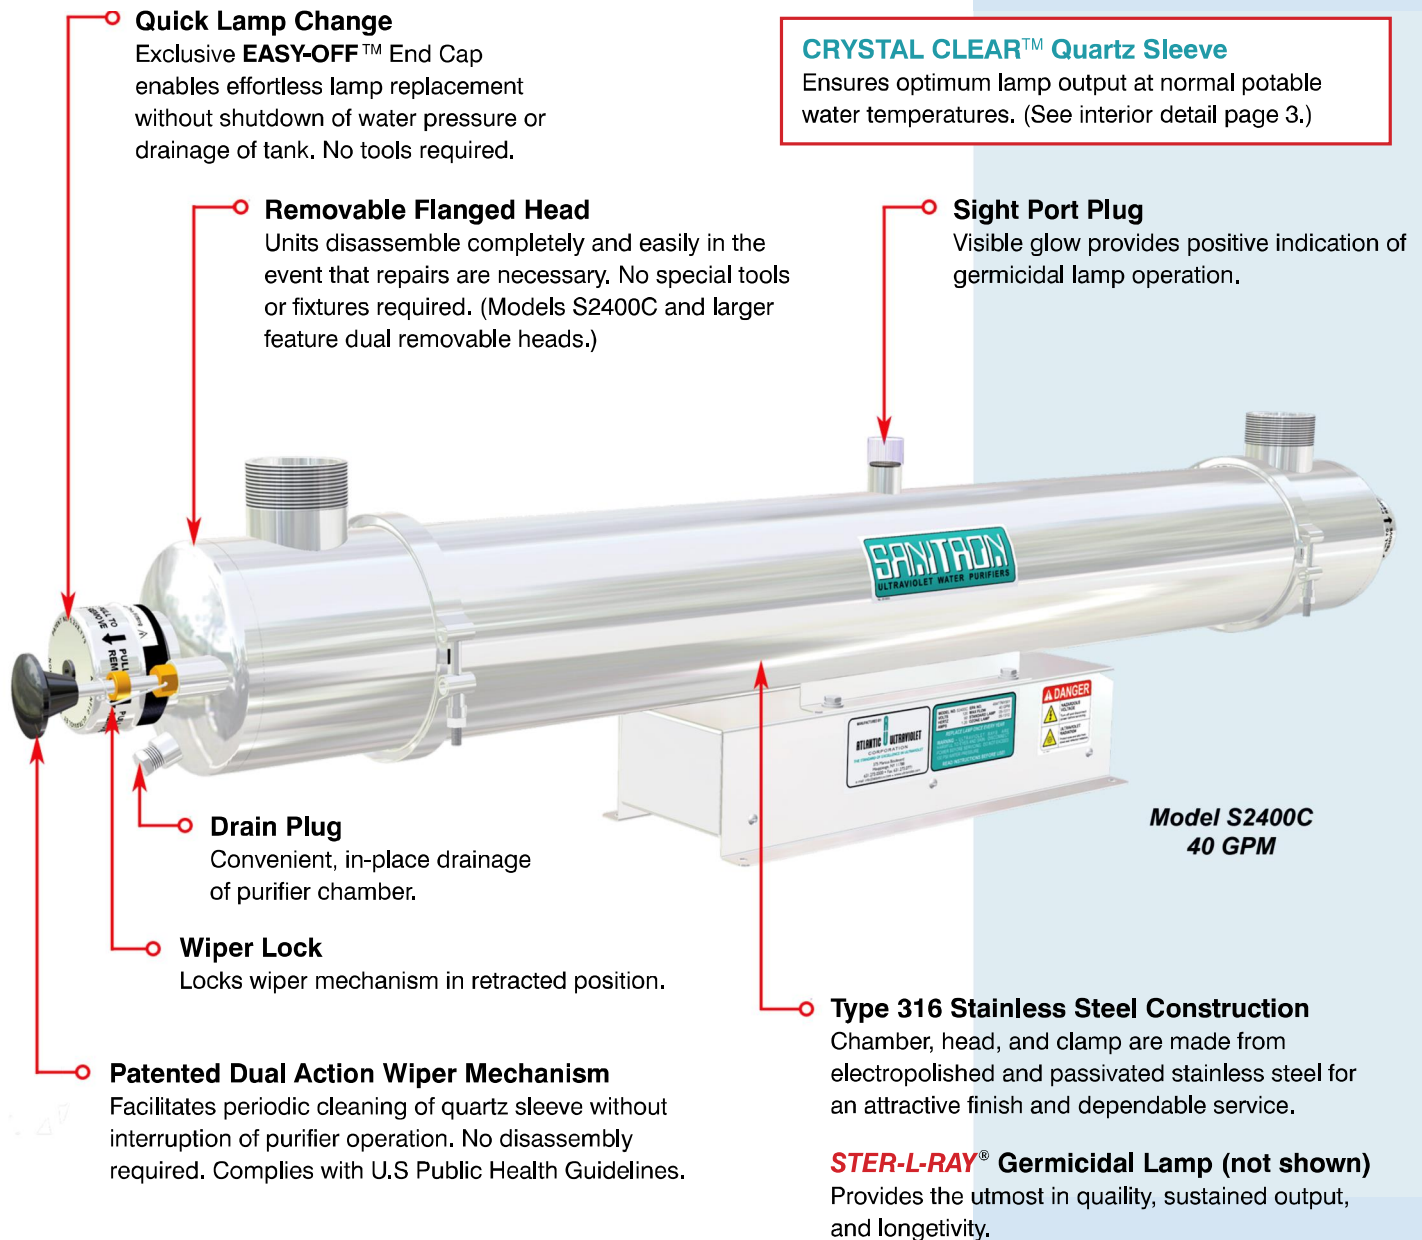

INSTALLATION & MAINTENANCE

The purifier is installed horizontally as close as possible to the point of use. Connection of the inlet and outlet to water supply and insertion of power plug into 3-wire GFCI grounded outlet is all that is required.

Ordinary maintenance consists of cleaning the quartz sleeve with the manual wiper once monthly or more frequently where conditions dictate. Lamp replacement is recommended every 10,000 hours of operation (approximately 14 months of continuous service).

OPTIONAL ACCESSORIES



Promate™ Audio Alarm
Activated by the **SENTRY™** or **GUARDIAN™** and alerts user to any malfunction detected



Promate™ Elapsed Time Indicator
Real-time, non-resettable display of accumulated operating hours



Promate™ Solenoid Valve
Operates with the **GUARDIAN™** or **SENTRY™** and prevents flow during detected malfunctions



Promate™ Time Delay Mechanism
Operates with **GUARDIAN™** or **SENTRY™** and **Promate™** solenoid valve to provide a 2-minute warm-up period for lamp to achieve full germicidal output



SureFLO™ Flow Control Valve

- Limits water flow to rated capacities
- Available in PVC and stainless steel



Promate™ Wall Mounting Kit

- Stainless steel material provides professional finish
- Pre-drilled and ready for quick and easy mounting of water purifier
- Optimizes free air circulation to cool ballast housing



QUANTUM™ Thermal Optimizer
Used to help regulate the water temperature inside the purifier's chamber

MONITORING OPTIONS

Good



The **STERALERT™** Lamp Status Alarm monitors visible light emitted through the sight port plug of the water purifier and activates an audible alarm when visible light falls below acceptable levels.

- Easy installation, no tools required
- Mounts on the sight port plug
- Operates on a 9v battery
- Monitors the visible light emitted by the ultraviolet lamp (does not monitor the ultraviolet intensity)
- Produces a high frequency tone, pulsed at two to three cycles per second
- Warns of lamp or power failure
- Available with Remote Sounder
- Available with Dry Contact for Connection to PLC
- Optional 120v 60Hz Power Adapter available
- Available for use with all **MIGHTY★PURE®** and **SANITRON®** models

Better



The **SENTRY™** Safety Sensor provides constant monitoring of the water purifier's ballast and germicidal lamp operation to give an indication of ballast and germicidal lamp status. The **SENTRY™** Safety Sensor is capable of operating an optional audio alarm and/or solenoid valve.

- Easy installation
- Plug **SENTRY™** into an electrical outlet, then plug water purifier into **SENTRY™**
- Operates optional Solenoid Valve and/or Audio Alarm
- Easily adaptable for use with other water purifier brands
- Warns of lamp failure
- Available for 120v 50/60Hz or 220v 50/60Hz (water purifiers operating with electronic ballasts)
- Available for use with most **Bio-Logic®**, **MINIPURE®**, **MIGHTY★PURE®** and **SANITRON®** models

Best



The **GUARDIAN™** Ultraviolet Monitor visually indicates the level of germicidal ultraviolet energy that penetrates the quartz sleeve and the water within the disinfection chamber. The **GUARDIAN™** Ultraviolet Monitor is capable of operating an optional Audio Alarm and Solenoid Valve. In addition, the **GUARDIAN™** Ultraviolet Monitor will detect loss of ultraviolet due to lamp outage, component or power failure. Use of the Ultraviolet Monitor is recommended by the US Public Health Service "Criteria for the Acceptability of an Ultraviolet Disinfection Unit."

The **GUARDIAN™** Ultraviolet Monitor will detect reduction of ultraviolet levels due to:

- Fouling or deposits on quartz sleeve.
- Poor ultraviolet transmission through the water. (Color, turbidity, organic or other impurities in the water can reduce or interfere with the transmission of ultraviolet rays.)
- Depreciation of lamp output due to usage or other cause. Lamp output gradually depreciates with use.
- Lamp replacement is recommended once each year.
- Available for use with all **MIGHTY★PURE®** and **SANITRON®** models.

Options may be obtained when purchase of **SANITRON®** unit is made or added at a later date. For further details visit Ultraviolet.com and BuyUltraviolet.com.

ULTRAVIOLET DOSAGE



Germicidal lamps provide effective protection against microorganisms. A small cross-section is shown below.

ORGANISM	ALTERNATE NAME	TYPE	DISEASE	DOSE*
<i>Bacillus subtilis</i> spores	<i>B. subtilis</i>	Bacteria	_____	22,000
Bacteriophage	Phage	Virus	_____	6,600
Coxsackie virus	_____	Virus	Intestinal infection	6,300
<i>Shigella</i> spores	_____	Bacteria	Bacterial Dysentery	4,200
<i>Escherichia coli</i>	<i>E. coli</i>	Bacteria	Food poisoning	6,600
Fecal coliform	_____	Bacteria	Intestinal infection	6,600
Hepatitis A virus	Infectious Hepatitis virus	Virus	Hepatitis of the liver	8,000
Influenza virus	Flu virus	Virus	Influenza	6,600
<i>Legionella pneumophila</i>	_____	Bacteria	Legionnaires' Disease	12,300
<i>Salmonella typhi</i>	_____	Bacteria	Typhoid Fever	7,000
<i>Staphylococcus aureus</i>	Staph	Bacteria	Food poisoning, Toxic Shock Syndrome, etc.	6,600
<i>Streptococcus</i> spores	Strep	Bacteria	Strep throat	3,800

When used as directed to disinfect clear water, **SANITRON®** Water Purifiers provide an ultraviolet dosage in excess of 30,000 microwatt seconds per square centimeter ($\mu\text{WSec}/\text{cm}^2$).

* Nominal Ultraviolet dosage ($\mu\text{WSec}/\text{cm}^2$) necessary to inactivate better than 99% of specific microorganism. Consult factory for more complete listing.

OPERATING CHARACTERISTICS

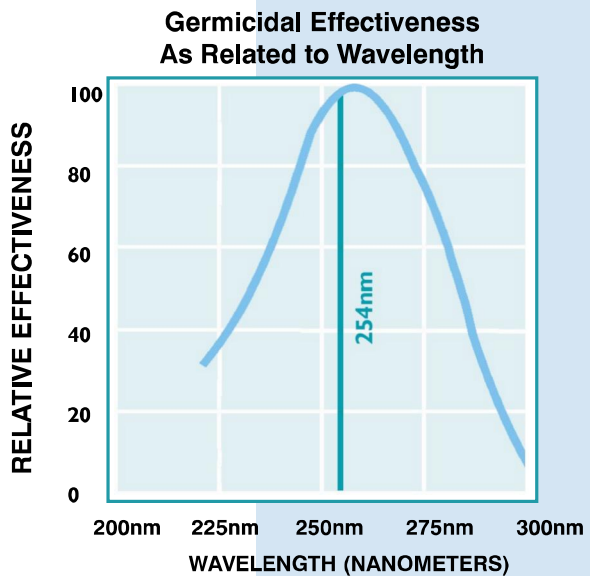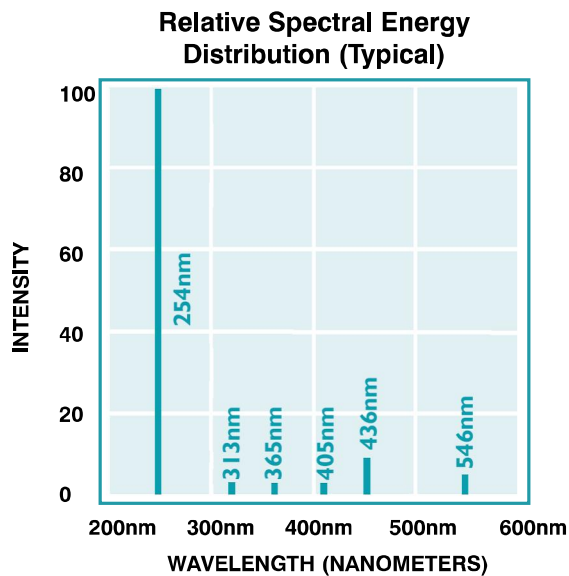

Approximately 95% of the ultraviolet energy emitted from **STER-L-RAY®** germicidal lamps is at the mercury resonance line of 254 nanometers, the region of germicidal effectiveness most destructive to bacteria, mold, and virus.

GENUINE **STER-L-RAY®** GERMICIDAL LAMPS

STER-L-RAY® Germicidal Lamps are shortwave, low pressure mercury vapor discharge tubes that produce ultraviolet wavelengths lethal to microorganisms.

STER-L-RAY® Germicidal Lamps are well suited to applications requiring high ultraviolet intensity such as water purification.

STER-L-RAY® Instant Start Germicidal Lamps are instant starting and utilize a coil filament on each end which operates hot. Lamp life is governed by the life of the electrodes and is affected by the frequency of starting.

STER-L-RAY® Preheat Germicidal Lamps are operated by a preheat-start circuit that employs a compact and economical ballast. The preheat circuit requires four electrical connections per lamp and a slight to moderate delay is needed to start the lamp.

STER-L-RAY® GX Germicidal Lamps yield up to 2/3 more ultraviolet output than standard lamps of the same length.

STER-L-RAY® and the **STER-L-RAY®** logo are trademarks of Atlantic Ultraviolet Corporation®.

CAUTION: Exposure to direct or reflected germicidal ultraviolet rays will cause painful eye irritation and reddening of the skin. Persons subject to such exposure must wear suitable faceshield, gloves and protective clothing.

Instant Start Germicidal Lamps



Preheat Germicidal Lamps



GX Germicidal Lamps



Germicidal Lamp Data

Lamp Number	Purifier Model No.	Nominal Lamp Length	Power Consumption ①	Ultraviolet Output ②	Rated Effective Life
05-1098-R	S17A	11 $\frac{7}{8}$ " (302mm)	14 Watts	4.0 Watts	10,000 Hrs
05-1097-R	S23A	17 $\frac{3}{4}$ " (451mm)	21 Watts	7.3 Watts	10,000 Hrs
05-1343-R	S37C	33 $\frac{3}{8}$ " (860mm)	41 Watts	15.0 Watts	10,000 Hrs
05-1334-R	S50C	45 $\frac{5}{8}$ " (1165mm)	55 Watts	21.0 Watts	10,000 Hrs
05-1311-R ③	S2400C & Larger	46 $\frac{1}{4}$ " (1175mm)	110 Watts	48.0 Watts	10,000 Hrs

① Wattage is lamp watts only and does not include ballast loss (approximate).

② Maximum rated output at 254 nanometers.

③ Patented by Atlantic Ultraviolet Corporation®.

The lamps listed above have been especially developed and are recommended for use with **SANITRON®** Water Purifiers.

All **STER-L-RAY®** lamps used in **SANITRON®** units are low pressure type which afford the maximum efficiency in producing the required germicidal rays. In addition, has advantage of high efficiency and low power requirements.

STANDARD MODELS

WATER QUALITY RECOMMENDATIONS



**Model S37C
12 GPM**

Maximum Concentration Levels Before Ultraviolet

<i>Turbidity</i>	5 NTU
<i>Suspended Solids</i>	10 mg/L
<i>Color</i>	None
<i>Iron</i>	0.3 mg/L
<i>Manganese</i>	0.05 mg/L
<i>pH</i>	6.5 – 9.5
<i>Hardness</i>	6 gpg

Effectively treating water with higher concentration levels than listed above can be accomplished, but may require added measures to improve water quality to treatable levels.

Model	Gallons Per Minute	Gallons Per Hour	Inlet and Outlet ①	Replacement Lamps	Power Consumption ②	Unit Dimensions (Inches)			Shipping Data (lbs.)	
						Length	Width	Height	Gross Wt.	Net Wt.
S17A	3	180	3/4" (19mm) NPT	05-1098-R	18 Watts	17 3/8 (441mm)	4 5/16 (110mm)	8 3/16 (208mm)	11	8
S23A	6	360	3/4" (19mm) NPT	05-1097-R	25 Watts	23 3/8 (594mm)	4 5/16 (110mm)	8 3/16 (208mm)	13	12
*S37C	12	720	1" (25mm) NPT	05-1343-R	48 Watts	37 3/8 (949mm)	5 11/16 (144mm)	9 1/2 (241mm)	25	25
S50C	20	1,200	1-1/2" (38mm) NPT	05-1334-R	65 Watts	50 3/8 (1280mm)	5 11/16 (144mm)	9 1/2 (241mm)	34	29
*S2400C	40	2,400	2" (51mm) NPT	05-1311-R	140 Watts	52 1/8 (1324mm)	6 5/8 (168mm)	11 1/2 (292mm)	40	36

When used as directed to disinfect clear water, **SANITRON®** Water Purifiers provide an ultraviolet dosage in excess of 30,000 microwatt seconds per square centimeter ($\mu\text{WSec/cm}^2$).

① All inlets and outlets are male pipe threads.

② Total power consumption including ballast loss.

- Maximum recommended operating pressure for all purifiers is 100 PSI.
- Pressure drop at maximum recommended flow rate is less than 5 PSI.
- Flow rates are based on Maximum Concentration Levels.
- 120 Volt and 220 Volt units are standard.
- 12 and 24 Volt units are also available for S17A, S23A and S37C
- **SANITRON®** is available for operation on public power supplied throughout the world.
- Consult factory with specific power requirements.
- * **CE** Compliant version available.

COMMERCIAL & INDUSTRIAL

Flexibility

System components are readily reconfigured to meet changing flow and process requirements.

Independent Monitoring

Single lamp chamber design enables separate output monitoring of each ultraviolet lamp.

Standby Capacity

Reserve chambers permit shutdown or replacement of individual components without interruption of service.

Special Options

- Sanitary and Custom Fittings for system compatibility (Use of Sanitary Fittings does not mean High-Purity Standards are met)
- Special Configurations for TOC and ozone reduction

(For larger capacities please refer to our **MEGATRON®** Ultraviolet Water Disinfection catalog.)



Model S5,000C
83 GPM

Shown with supplied Interconnect piping, optional **GUARDIAN™** Digital Ultraviolet Monitors, **Promate™** Solenoid Valve, **SureFLO™** Flow Control Valve and customer supplied piping, union and shut-off valve.

Model	Gallons Per Minute	Gallons Per Hour	Inlet and Outlet ⑥	Replacement Lamps	Power Consumption ⑦	Unit Dimensions (Inches)			Shipping Data (lbs.)	
						Length	Width	Height	Gross Wt.	Net Wt.
*S5,000C ①	83	5,000	2" (51mm) NPT	05-1311-R (2)	280 Watts	52 $\frac{1}{8}$ (1324mm)	17 (432mm)	15 (381mm)	116	85
*S10,000C ②	166	10,000	2" (51mm) NPT	05-1311-R (4)	560 Watts	52 $\frac{1}{8}$ (1324mm)	21 $\frac{1}{8}$ (537mm)	34 $\frac{3}{4}$ (883mm)	267	188
*S15,000C ③	250	15,000	2" (51mm) NPT	05-1311-R (6)	840 Watts	52 $\frac{1}{8}$ (1324mm)	21 $\frac{1}{8}$ (537mm)	53 $\frac{3}{4}$ (1365mm)	400	263
*S20,000C ④	333	20,000	2" (51mm) NPT	05-1311-R (8)	1120 Watts	52 $\frac{1}{8}$ (1324mm)	21 $\frac{1}{8}$ (537mm)	71 $\frac{1}{4}$ (1822mm)	534	396
*S25,000C ⑤	416	25,000	2" (51mm) NPT	05-1311-R (10)	1400 Watts	52 $\frac{1}{8}$ (1324mm)	21 $\frac{1}{8}$ (537mm)	90 $\frac{3}{4}$ (2305mm)	670	520

When used as directed to disinfect clear water, **SANITRON®** Water Purifiers provide an ultraviolet dosage in excess of 30,000 microwatt seconds per square centimeter (μ WSec/cm²).

- ① Two S2400C's connected in series, 1 inlet and 1 outlet.
- ② Two S5,000C's connected in parallel, 2 inlets and 2 outlets.
- ③ Three S5,000C's connected in parallel, 3 inlets and 3 outlets.
- ④ Four S5,000C's connected in parallel, 4 inlets and 4 outlets.
- ⑤ Five S5,000C's connected in parallel, 5 inlets and 5 outlets.
- ⑥ All inlets and outlets are male pipe threads.
- ⑦ Total power consumption including ballast loss.

- Maximum recommended operating pressure for all purifiers is 100 PSI.
- Pressure drop at maximum recommended flow rate is less than 5 PSI.
- Flow rates are based on Maximum Concentration Levels, shown on page 8.
- 120 Volt and 220 Volt units are standard.
- **SANITRON®** is available for operation on public power supplied throughout the world.
- Consult factory with specific power requirements.
- * **CE** Compliant version available.

COMMERCIAL & INDUSTRIAL

APPLICATIONS

Model S10,000C — 166 GPM

Shown with supplied Interconnect Piping, optional **GUARDIAN™** Digital Ultraviolet Monitors, Solenoid Valves, Flow Control Valves and customer supplied manifolds, piping, unions and shut-off valves.




élan Water Filters

Filters outperform conventional filters available for use with the **SANITRON®** S2400C and larger units.


Call factory for more information.

- Amusement / Water Parks
- Restaurants
- Resorts / Hotels / Motels
- Ships / Yachts / Boats
- City / Well Water
- Fountains / Lakes / Ponds
- Laundry
- Apartment Complex
- Swimming Pools
- Nursing Homes
- Schools
- Laboratories
- Hospitals / Veterinary Clinics
- RV Parks / Campgrounds
- Medical Facilities
- Laboratories
- Rainwater / Cisterns
- Burn Centers
- Water Vending
- Universities / Schools
- Cooling Tower
- Animal Husbandry / Farms / Ranches
- Fish Farms / Hatcheries
- Food / Dairy Processing
- Bottling Facilities
- Water / Beer / Wine / Juices / Soft Drinks
- Pharmaceutical Mfg.
- Electronic Production
- Cosmetic Production
- TOC Reduction
- Ozone Reduction
- Plus countless other facilities

COMPARISON OF ATLANTIC ULTRAVIOLET WATER PURIFIERS

FEATURES [S] - Standard [O] - Optional [X] - Yes	Bio-Logic® Pure Water Pack™ 1.5 GPM	MINIPURE® 1 to 9 GPM	MIGHTY★PURE® 3 to 20 GPM	SANITRON® 3 to 20 GPM	SANITRON® 40 to 416 GPM	MEGATRON® 90 to 450 GPM
Stainless Steel Construction	S	S	S	S	S	S
STER-L-RAY® Germicidal Ultraviolet Lamp with 10,000 Hours Rated Effective Life	S	S	S	S	S	S
Quick Lamp Change with the EASY-OFF™ End Cap	S	S	S	S	S	S
CRYSTAL CLEAR™ Quartz Sleeve	S	S	S	S	S	S
Lamp Out Indicator Light(s)	S	S	-	-	-	S
Sight Port to View Lamp Operation	-	-	S	S	S	S
Drain Fitting	-	-	S	S	S	S
Patented Dual Action Wiper Mechanism - Manual	-	-	-	S	S	S
Patented Dual Action Wiper Mechanism - Automatic	-	-	-	-	-	O
Head(s) that can be removed or rotated	S	-	-	S	S	S
Sediment and Carbon Filter	S	-	-	-	-	-
Promate™ Mounting Kit / Bracket	S	O	O	O	O ①	-
GUARDIAN™ Ultraviolet Monitor	-	-	O	O	O	S
SENTRY™ Safety Sensor	O	O	O	O	O	-
Promate™ Audio Alarm	S	S	O	O	O	-
Promate™ Solenoid Valve	-	O	O	O	O	-
SureFLO™ Flow Control Valve	-	O	O	O	O	-
Promate™ Elapsed Time Indicator	O	O	O	O	O	S
Promate™ Time Delay Mechanism	-	O	O	O	O	-
Residential Use	X	X	X	X	X	-
Commercial Use	-	-	X	X	X	X
 Certified Models ②	-	-	X	X	X	-
 Certified Models	-	-	X	-	-	-

① Model S10,000C & larger come equipped with mounting rack

② **MIGHTY★PURE®** MP36C and **SANITRON®** S37C, S2400C, S5,000C, S10,000C, S15,000C and S20,000C are available as  Certified

The Standard of Excellence In Ultraviolet



Manufacturers / Engineers / Sales / Service – Germicidal Ultraviolet - Equipment & Lamps

ATLANTIC  **ULTRAVIOLET**
CORPORATION®

SINCE 1963



ultraviolet.com

buy
ultraviolet.com 

375 Marcus Boulevard • Hauppauge, NY 11788 • 631.273.0500 • Fax: 631.273.0771
E-mail: info@ultraviolet.com • ultraviolet.com • buyultraviolet.com

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

Document No. 98-1169 • September 2017 • ©2017 by Atlantic Ultraviolet Corporation® • **MADE IN THE USA**