

## Water Filtration System

All Sub-Zero built-in models except models BI-36R and BI-36RG feature a water filtration system that supplies filtered water to the ice maker and water dispenser (dispenser models) to produce great-tasting water and ice. The water filter has been factory installed behind the grille assembly. Refer to the illustration below.

When using the water filter for the first time, it is necessary to clear any air from the water system and allow the filter to assist in cleaning the water lines. For non-dispenser models, this is done by discarding the first two full containers of ice. For dispenser models, dispense multiple glasses of water for a period of two minutes.

**IMPORTANT NOTE:** The water system and installation must comply with applicable state and local regulations.


### WATER FILTER CARTRIDGE MONITOR

It is important that the operation, maintenance and filter replacement requirements be carried out as scheduled. The water filter cartridge is rated for 750 gallons (2839 L) or one year, whichever comes first. The electronic control system monitors the life of the water filter cartridge and indicates when it needs to be replaced.


### WATER FILTER CARTRIDGE REPLACEMENT

When it is time to replace the water filter cartridge, the  indicator will be visible in the control panel display. Follow these steps to replace the water filter cartridge:

- 1) To access the water filter, pull out on the bottom edge of the grille assembly and tilt the grille frame forward.
- 2) To remove the old filter cartridge, simply rotate the cartridge counterclockwise one-quarter turn and pull it out. Refer to the illustration below. There will be water in the filter cartridge, so it is normal for a small amount to spill out.
- 3) Remove the new filter cartridge from its packaging and carefully remove the plastic cap.
- 4) Insert the new filter into the manifold and turn clockwise until the filter is seated.
- 5) Once the filter cartridge has been replaced, press and hold the water filter reset button for five seconds in order to reset the water filter life monitor. The filter life monitor has been successfully reset if the  indicator is no longer displayed in the control panel display. Refer to the illustration below.

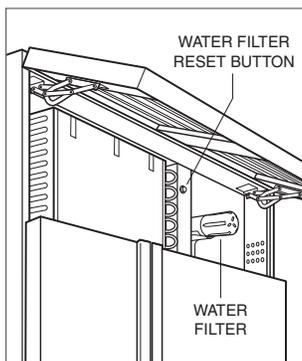

Location of water filter.

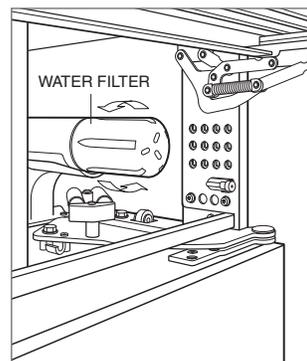

Water filter cartridge removal.

## Water Filtration System

### WATER FILTER CARTRIDGE REPLACEMENT

**IMPORTANT NOTE:** For non-dispenser models, the first two full containers of ice produced should be discarded after a new water filter cartridge has been installed. Allow 24 hours before discarding the first container of ice. For dispenser models, dispense several glasses of water for a period of two minutes. This will help clean the water system and clear air from the line.

Although it is designed to last for up to one year of use, the actual life of the water filter cartridge may vary with water supply conditions. Therefore, it is recommended that the cartridge be replaced when the  indicator is displayed, if the ice cubes become hollow or smaller, or the water flow from the dispenser has slowed significantly.

**IMPORTANT NOTE:** The warranty for the water filter cartridge supplied with the unit only covers defects in materials or workmanship and not replacement due to normal use.

### REPLACEMENT CARTRIDGES

Replacement Sub-Zero water filter cartridges can be ordered online at [subzerowolfstore.com](http://subzerowolfstore.com). For questions, contact Sub-Zero customer care at 800-222-7820.

### WATER FILTRATION SYSTEM OPTIONS

If you choose not to use the water filtration system, the system can be placed in water filter bypass mode by simply removing the water filter cartridge.

**IMPORTANT NOTE:** A reverse osmosis water filter system may not maintain the minimum water pressure needed for the water filter to operate properly. It is recommended that the water filter cartridge be removed from the unit if a reverse osmosis system is utilized in the household.