


MODEL : 50CR2.75S

BORE	OUT PUT		POLES	RPM	PHASE	VOLTAGE	HZ	RATED AMPERAGE	STARTING AMPS	STARTING METHOD	INS. CLASS	SOLIDS DIA.
	HP	KW										
2" (50mm)	1	0.75	2	3431	1	115	60	10.0	41.90	Capacitor Run	E	1 1/4" (35mm)

MODEL : 50CR2.75T

BORE	OUT PUT		POLES	RPM	PHASE	VOLTAGE	HZ	RATED AMPERAGE	STARTING AMPS	STARTING METHOD	INS. CLASS	SOLIDS DIA.
	HP	KW										
2" (50mm)	1	0.75	2	3420	3	230	60	3.3	21.04	DIRECT	E	1 1/4" (35mm)

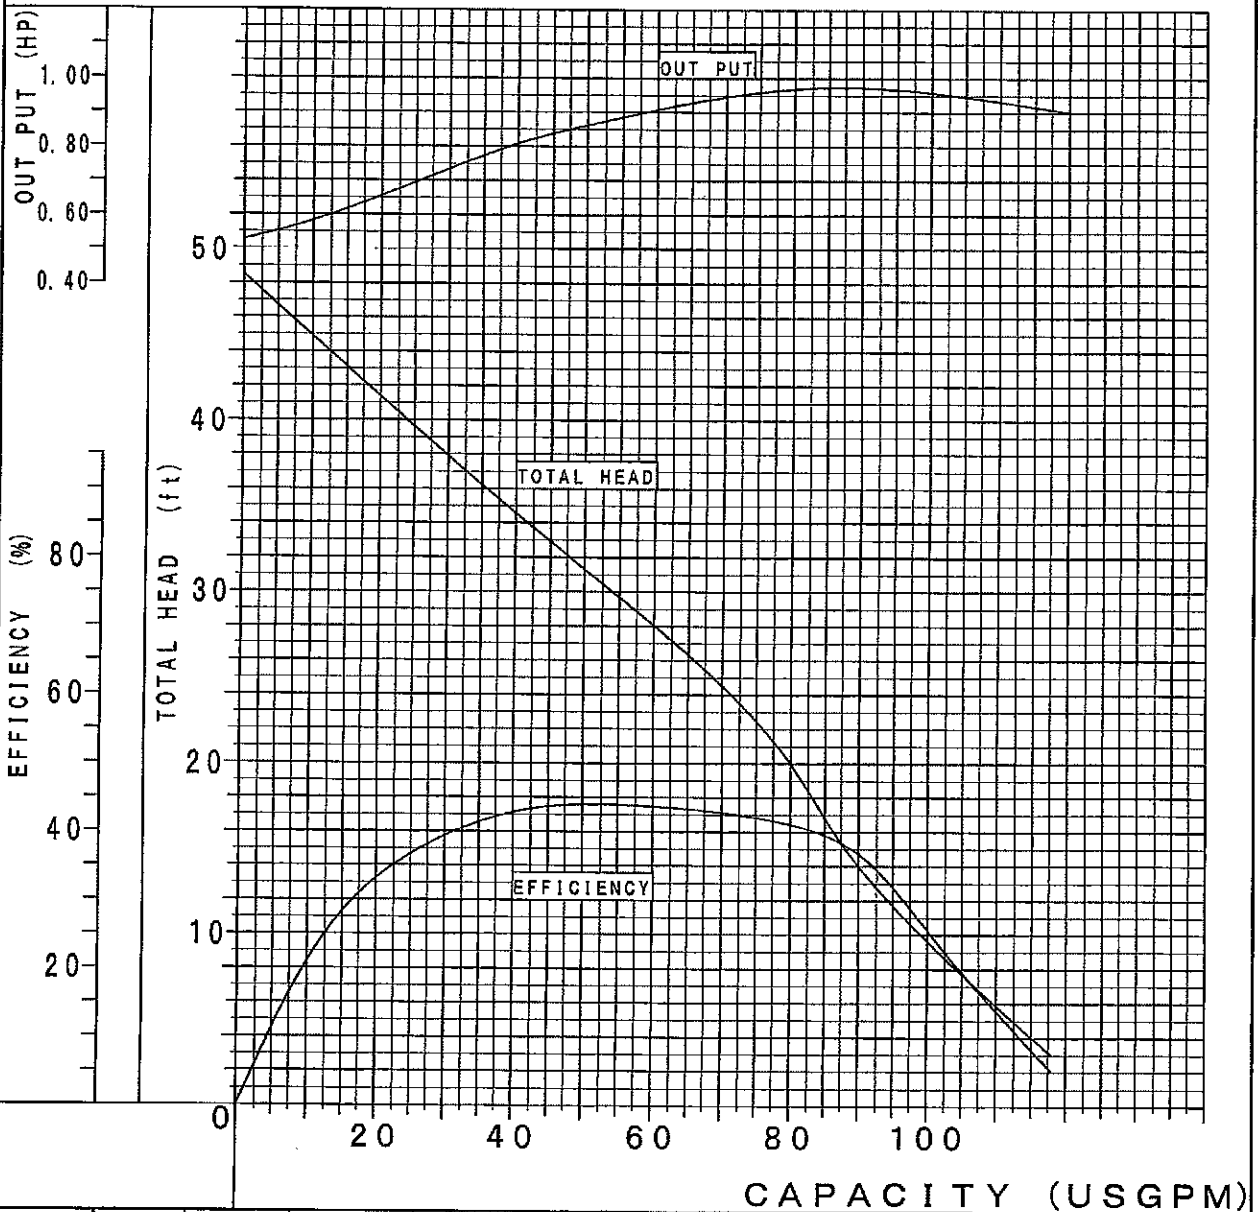

DWG.		TITLE	DWG No.
JUDG.		PERFORMANCE CURVE	Y31944
APPD.			