



EV9799-04

SSW-10 Wrap ScaleStick®

Inhibits mineral scale deposits and provides corrosion control in water-fed equipment



SSW-10 Wrap ScaleStick:
EV9799-04
CWS-10 Carbon Block Filter Wrap:
EV9799-06
SWS-10 Sediment Filter Wrap:
EV9799-05

BENEFITS

Features Hydroblend™ compound, a unique blend that inhibits mineral scale deposits and provides corrosion protection in low flow water-fed equipment

Patented design (patent no. 5,580,448) dispenses a controlled amount of Hydroblend™ for long-term protection and provides greater effectiveness than standard phosphate treatments

Unaffected by high temperatures, permitting a wide variety of applications

Integral feed cartridge fits most standard 10 inch housings

Translucent cartridge allows simple visual monitoring of product usage and ensures against wasteful premature cartridge replacement

Wrap ScaleStick® (SSW-10) are specially designed to be used with a sediment filter wrap (SWS-10) or carbon block filter wrap (CWS-10) to provide sediment filtration, chlorine reduction and scale control in one compact unit. They are designed to fit over and around the Wrap ScaleStick® and are sold separately

INSTALLATION TIPS

Housing not included. Order Model A-10 Clear 10" Housing (EV9100-01) separately for temperatures less than 125 °F

Make sure selected housing fits temperature/pressure conditions

Install vertically with black o-band seal up

Wrap ScaleStick® cartridges are shorter than standard ScaleStick® cartridges and do not have the o-band seal. They cannot be installed without the special filter wraps. Standard ScaleStick® cartridges cannot be installed into filter wraps

OPERATION TIPS

Deliming of equipment prior to application is recommended, but not required

Inspect ScaleStick® cartridges at least every 6 months

Replace ScaleStick® before Hydroblend™ compound is completely dissolved

Pre-existing equipment scale may come loose and clog equipment. Remove any loose scale to assure satisfactory operation

APPLICATION/SIZING

For water-using equipment:

Steamers and Combi-ovens
Ice Machines
Coffee and Espresso Machines
Proofers

SSW-10 Wrap ScaleStick®

SPECIFICATIONS

Dimensions:

Wrap ScaleStick SSW-10:
9-9/16"H x 1-5/16" Diameter

Filter Wraps:
7-11/16"H x 2-13/16" Diameter


Service Flow Rate:
0.1 - 6 gpm

Maximum Temperature: 150°F*

*If inlet feed water temperature is above 125°F a hot water housing must be used.

Note: Filter Wraps are not to be used in hot water feed applications.

**The ScaleStick® trademark is used pursuant to an agreement between PWC Enterprises and Everpure, Inc.

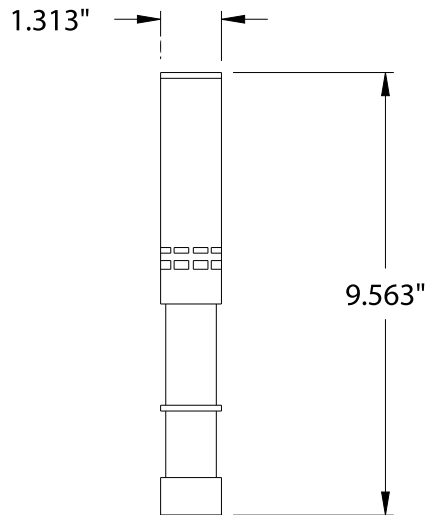

WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.



This SSW-10 is Tested and Certified by NSF International against NSF/ANSI Standard 42 for material requirements only.
COMPONENT

EVERPURE®

Worldwide Headquarters:
EVERPURE, LLC
1040 Muirfield Drive
Hanover Park, Illinois 60133
Toll Free (800) 323-7873
Tel (630) 307-3000
Fax (630) 307-3030
<http://www.everpure.com>

In Europe:
Pentair Water Belgium B.V./B.A.
Industriepark Wolfstee
Toekomstlaan 30
B- 2200 Herentals
BELGIUM
TEL: +32.(0).14.283.500
FAX: +32.(0).14.283.505

In Japan:
Hashimoto MN Bldg. 7F
3-25-1 Hashimoto Sagamihara-Shi
KANAGAWA 229-1103
JAPAN
TEL: 81.(0)42.775.3011
FAX: 81.(0)42.775.3015