



BUILT TO HOLD. BUILT TO LAST.

Build Smart with Edging from SEK-Surebond.

Paver edging is essential to the strength, stability, and longevity of any hardscape project. Made in the USA, our full line of edging solutions is engineered for superior strength and long-term performance. Don't risk costly failures or your reputation - choose quality that holds.

Every great hardscape finishes strong - and stays strong -
with edging by SEK-Surebond.

EDGECRETE


ENHANCED CONCRETE EDGING POLYMER MODIFIED - FIBER REINFORCED

EdgeCrete fiber-reinforced, polymer-modified concrete edge restraint is designed for both open-graded and standard base applications. Ideal for pavers, stone and porcelain, it offers unbeatable strength and durability with an easy-to-mix, easy-to-install formula. Just add water, mix, and follow the simple installation instructions – no spikes needed.




FROM THE MAKERS OF SNAP EDGE: FLEXIBILITY MEETS STRENGTH

- Fiber Reinforced to Resist Cracking and Maintain Structural Integrity
- Polymer Modified for Superior Strength and Long-Lasting Performance
- Easy Installation - No Spikes Required
- Versatile - Perfect for Open-Graded and Standard Base Applications

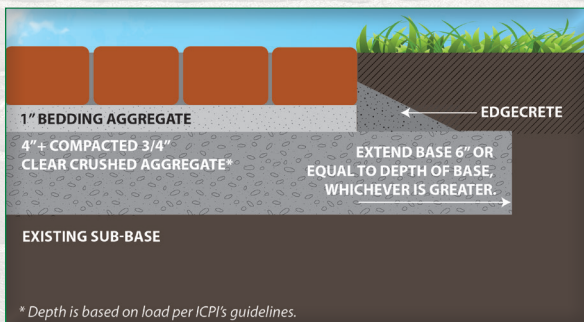

Open Graded Base Applications
Coverage per 50 lb bag: 13'

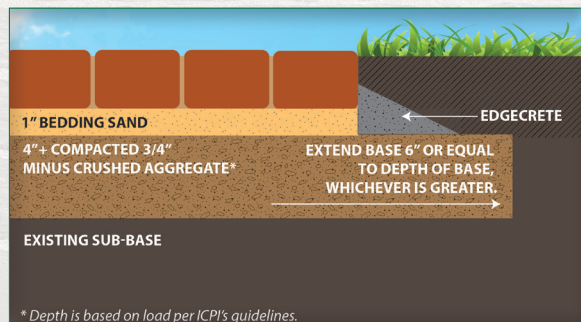

Standard Base Applications
Coverage per 50 lb bag: 17'

HOW-TO VIDEO





Securing Hardscapes Since 1990

INJECTION MOLDED EDGING FOR PAVERS 2" - 3 1/8" IN HEIGHT


Snap Edge, the original **One Piece Does It All** paver restraint, is impossible to match in performance, strength, and reliability. Built tough for pros, its injection-molded design delivers maximum durability and long-term stability on every job. Designed for pavers or natural stone 2" - 3 1/8" thick, **Snap Edge** installs fast, holds tight, and finishes strong - every time.

BUILT TO LAST, IMPOSSIBLE TO MATCH.


- Thick, Buttressed Back Wall Locks Hardscape in Place
- Open Base Design Allows Grass Growth for an Invisible Edge
- Made from 100% Recycled HDPE—Won't Warp, Twist, or Crack
- Available in 8' lengths with 1 7/8" back wall height and 2 7/8" base width




One Piece Does It All
Straights & Curves
Just Snip n Flex!

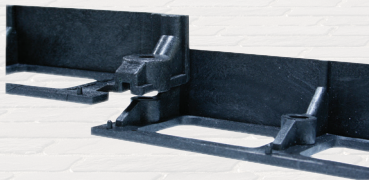

Strong Interlocking Joint with Built-In Spike-Through Connector

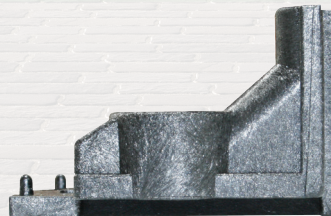

Rugged Injection Molded Design

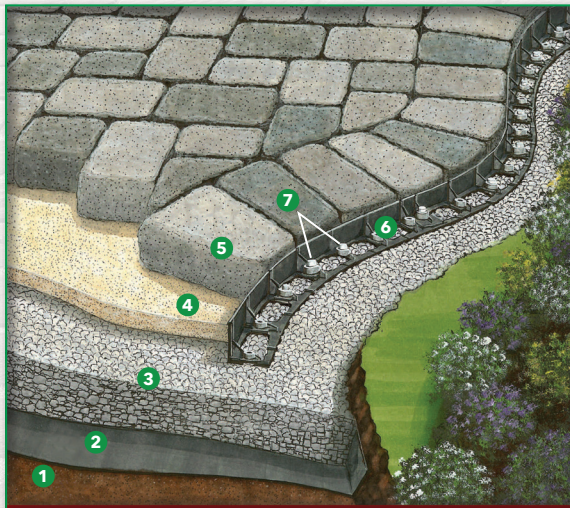

"BEST PRACTICE" TYPICAL PAVER INSTALLATION

1. Compacted Soil Subgrade
2. Separation Fabric
3. Compacted Aggregate Base
4. Bedding Sand
5. Pavers
6. Snap Edge Paver Restraint
7. 8" - 10" Spikes

HOW-TO VIDEO



INJECTION MOLDED EDGING FOR PAVERS 1" - 2" IN HEIGHT

LEARN MORE

Low Profile is a contractor-grade paver restraint designed for pavers, stone and slabs 1 - 2" in height. Engineered with the same robust features as Snap Edge, it delivers the strength and durability needed for secure, long-lasting installations. Available in 6'8" lengths with 1 3/8" back wall height and 2 7/8" base width.



BUILT TO HOLD. BUILT TO LAST.
Build Smart with Edging from SEK-Surebond.

