


Add-On Post Filter Instruction Sheet - Gravity Filters

DATA

This add-on filter* is only to be used in conjunction with the ceramic filter elements contained in this gravity filter unit. The filters should be flushed upon installation, first supply of filtered water should be discarded after first run of these elements. These filters will last approximately 400 gallons or 6 months, upon regular daily usage. With these add-on filters installed, flow rate will drop considerably if water in the bottom container is above the half-way point.

INSTRUCTIONS

With ceramic elements installed (as instructions state), remove top container from bottom container and place upside-down on a flat surface. Remove elements from packaging, along with plastic adaptor. Screw on plastic adaptor to the elements (pliers or wrench may be needed to ensure a tight fit). With ceramic elements installed, leaving the wing-nut and washer in place, screw the elements on to the exposed threaded end of the ceramic element in gravity filter. Re-assemble top container onto top container, as instructed, and unit is ready for use. As stated above, please discard first run of filtered water as there may be loose dust particles that can create an aftertaste. Once discarded, fill unit as normal and use as instructed.

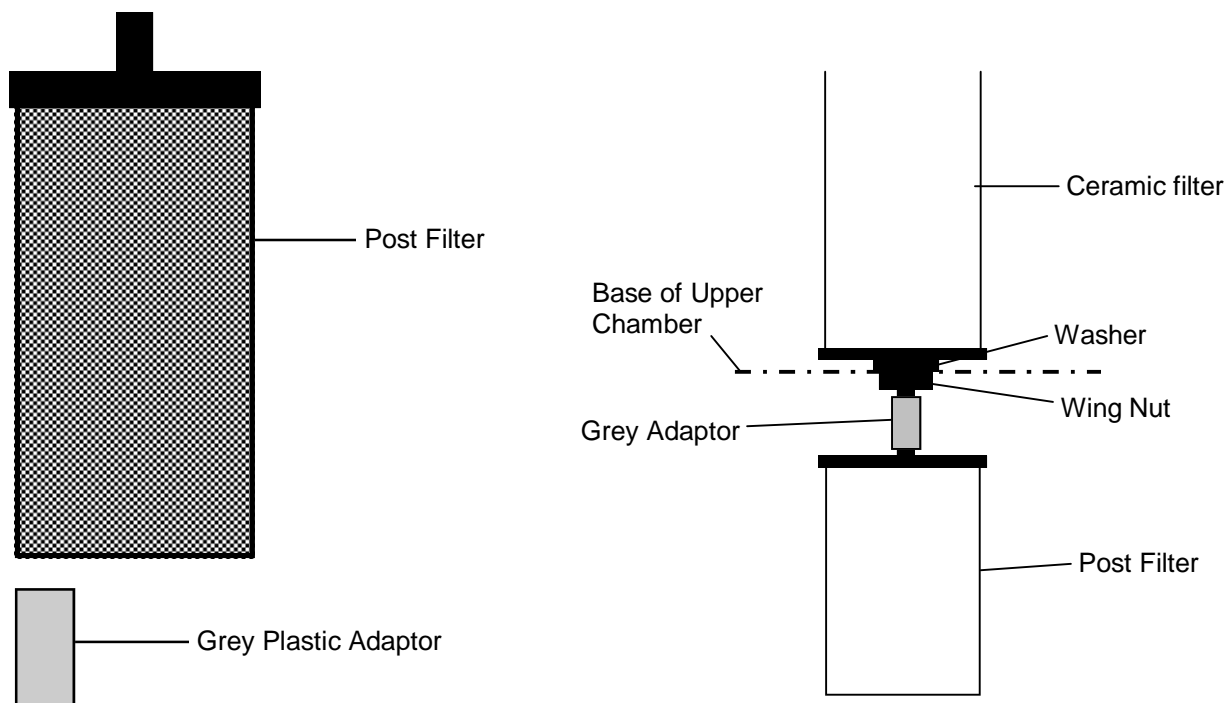

*This filter is manufactured and constructed using FDA approved materials.

**This adaptor is only used with the grey adaptor for use on non-Doulton® filter elements where the thread size is smaller than the thread on the Doulton® filter. This adaptor is threaded into one end of the grey adaptor to be threaded onto the non-Doulton® filter and then threaded onto the post filter.