


# SHARKBITE®

## CATALOG



# SHARKBITE

## THE MARK OF QUALITY

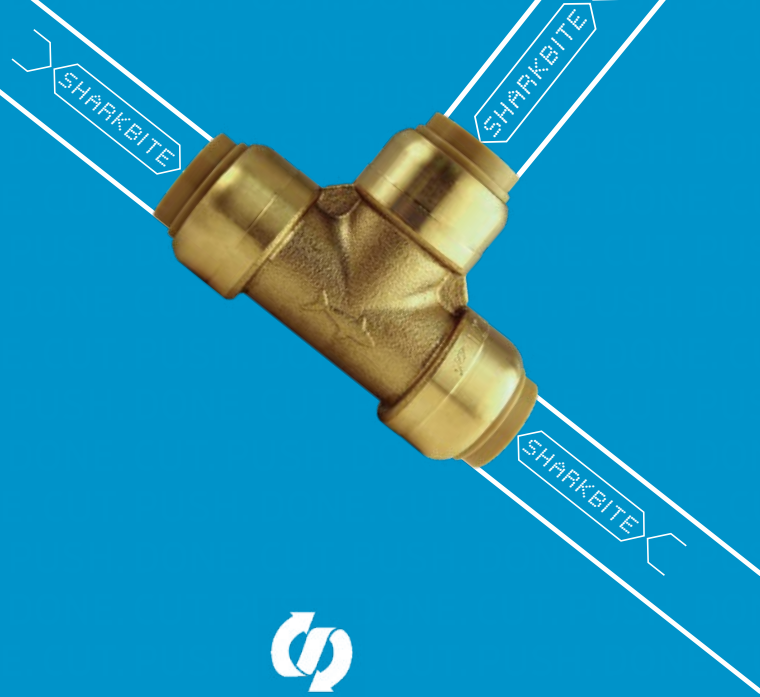

### LEAD-FREE/SAFETY\*

All SharkBite® fittings are made of Lead Free DZR brass and exceed ASSE 1061 Section IV, 4.1 Materials-Dezincification (DZR)-ISO 6509 standards.

*\*Reference Page 26 for additional information.*



### VERSATILE

SharkBite fittings have the versatility to transition from Copper, PEX, CPVC, PE-RT, HDPE, Polybutylene and PVC.



### PROVEN AND GUARANTEED

SharkBite's quality and performance is field-proven with more than 550 million connections. SharkBite owns the entire manufacturing process, from raw brass to finished product, making SharkBite the only push-to-connect brand that can ensure a clean, leak-free connection.



### NO TOOLS

No glue, solder, clamps or unions required when using SharkBite fittings, providing a quick and efficient application that saves installers time, labor, and money.



### FLEXIBILITY

SharkBite fittings can be rotated even after assembly allowing for easier installation in tight places.



### BEHIND-THE-WALL

SharkBite fittings are approved to be used underground and behind walls without access panels.

### CERTIFICATIONS

- Fittings are certified to 200 °F (93 °C) max and 200 psi max
- Design certified to NSF/ANSI 61 and ASSE 1061 product standard for use in potable water and hydronic heating water distribution



PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
<b>WATER SOFTENER FITTING</b>		
3/4" X 1" FIP	U086LF	12



<b>1-B: RADIANT FITTINGS</b>		
<b>RADIANT FITTINGS (NON-POTABLE WATER APPLICATION)</b>		
Non-potable water application fittings are manufactured with standard DZR brass.		
5/8" X 5/8" Coupling	U012	6
3/4" X 5/8" Reducing Coupling	U057	6
5/8" X 3/4" MNPT Reducing Adapter	U126	6
5/8" X 5/8" Elbow	U252	6
3/4" X 5/8" Elbow	U273	6
5/8" X 5/8" X 5/8" Tee	U366	6
5/8" End Stop	U516	6



<b>1-C: TRANSITION FITTINGS</b>		
<b>POLYBUTYLENE TRANSITION COUPLINGS</b>		
1/2" PB X 1/2" CTS	U4008LF	6
3/4" PB X 3/4" CTS	U4016LF	6
<b>PVC TRANSITION COUPLINGS</b>		
SharkBite PVC transition fittings connect Copper, PEX, CPVC, or PE-RT pipe to PVC pipe (Sch. 40, 80 and 120) without soldering, clamps, unions, or glue.		
1/2" CTS X 1/2" PVC	UIP4008	6
3/4" CTS X 3/4" PVC	UIP4016	6
1" CTS X 1" PVC	UIP4020	3
<b>PVC TRANSITION SLIP TEES</b>		
1/2" CTS X 1/2" CTS X 1/2" PVC	UIP363	3
1/2" PVC X 1/2" PVC X 1/2" CTS	UIP364	3
3/4" CTS X 3/4" CTS X 3/4" PVC	UIP371	3
3/4" PVC X 3/4" PVC X 3/4" CTS	UIP372	3
1" CTS X 1" CTS X 1" PVC	UIP375	3
1" PVC X 1" PVC X 1" CTS	UIP376	3
<b>PVC SLIP COUPLINGS</b>		
1/2" PVC X 1/2" PVC	UIP3008	3
3/4" PVC X 3/4" PVC	UIP3016	3
1" PVC X 1" PVC	UIP3020	2
<b>PVC MALE CONNECTORS</b>		
1/2" PVC X 1/2" MNPT	UIP120	6
3/4" PVC X 3/4" MNPT	UIP134	6
1" PVC X 1" MNPT	UIP140	3
<b>PVC CAPS</b>		
1/2"	UIP514	12
3/4"	UIP518	12
1"	UIP520	12
<b>PVC DEPTH GAUGE AND DISCONNECT CLIPS</b>		
1/2"	UIP710	12
3/4"	UIP712	12
1"	UIP714	6

