

For Commercial & Residential Applications

Job Name _____
 Job Location _____
 Engineer _____
 Approval _____


Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

LEAD FREE*
Clear Vinyl Tubing

Our Clear Vinyl Tubing is manufactured from Polyvinyl Chloride

Attributes

- Clarity of glass
- Smooth dense bore maximizes flow and reduces sediment buildup

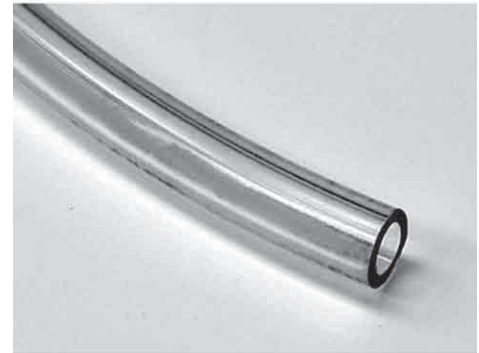

Applications

- Beverage dispensing
- Potable water
- Drainage lines
- Aquarium tubing
- Laboratory tubing
- Protective insulation

DO NOT USE AS ICE MAKER SUPPLY LINE.

Resistant to

Acids, alkalis, variety of chemical, gases and liquids
 (see PL-Tubing for listing of chemicals)

- Pressure Range 19 to 55psi
 (131 – 379 kPa)
 Maximum Operating Temperature 175°F (79°C)
 Brittle Point -40°F (-40°C)
 Material Polyvinyl Chlorine
 Color Clear
 Hardness Durometer 83+/-3 Shore A
 Toxicity Non-toxic FDA Listed
 Material

Packaging

Coils, dispenser boxes, dispenser spools

*The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

Pressure Range

O.D. INCH	I.D. INCH	WALL	WORKING PRESSURE (PSI @ 70°F)
1/8	1/16	1/32	55
3/16	1/8	1/32	55
1/4	1/8	1/16	55
5/16	3/16	1/16	55
1/4	3/16	1/32	55
7/16	3/16	1/8	55
3/8	1/4	1/16	55
7/16	1/4	3/32	55
1/2	1/4	1/8	55
7/16	5/16	1/16	50
1/2	5/16	3/32	55
9/16	5/16	1/8	55
1/2	3/8	1/16	45
9/16	3/8	3/32	55
5/8	3/8	1/8	55
9/16	7/16	1/16	45
5/8	7/16	3/32	50
11/16	7/16	1/8	55
5/8	1/2	1/16	45
11/16	1/2	3/32	50
3/4	1/2	1/8	55
7/8	11/16	3/32	35
13/16	9/16	1/8	45
3/4	9/16	3/32	50
3/4	5/8	1/16	30
13/16	5/8	3/32	45
7/8	5/8	1/8	40
7/8	3/4	1/16	30
15/16	3/4	3/32	35
1	3/4	1/8	35
1-1/8	7/8	1/8	30
1-1/4	1	1/8	25
1-3/16	1	3/32	25
1-3/4	1-1/4	1/4	25
1-5/8	1-1/4	3/16	25
1-1/2	1-1/4	1/8	25
2	1-1/2	1/4	25
1-7/8	1-1/2	3/16	25

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: No. Andover, MA • Tel: (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com
 Canada: Burlington, ON • Tel: (905) 332-4090 • Fax: (905) 332-7068 • www.wattscanada.ca

A Watts Water Technologies Company