

Aqua-Pure®

Model:

AP717

In-Line Filtration System

Spec # _____


Quantity _____

Applications:

- Particulate*
- Chlorine Taste & Odor
- Scale Inhibition*

At a Glance:

- Triple action filtration process (particulate*, chlorine taste & odor and scale inhibition*)
- In-line design for fast and easy installation
- Standard 1/4" NPT inlet/outlet connections
- Provides flow rate up to 0.5 gpm
- Manufactured from FDA CFR-21 compliant materials

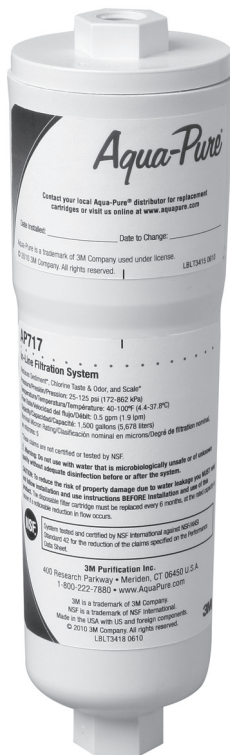

AP717

Product Benefits:

- Designed with specially formulated high adsorption activated carbon media to help provide reduction of unwanted chlorine taste and odor
- Designed with premium performance depth pre-filter for high particulate* reduction efficiency and longer cartridge life than our previous design
- Includes scale and corrosion inhibition media* to help protect equipment and ice makers against scale build-up and potentially damaging effects of corrosion
- NSF/ANSI Std. 42 listed under Aesthetic Effects for Chlorine Taste & Odor


Product Specifications:

Model No. (Part No.)	Inlet/ Outlet Size	Dimensions		Approx. Weight	Flow Rate	Capacity	Max. Water Temp.	Max. Water Pressure	Standard Repl. Ctg. No.	Micron Rating
		Height	Diameter							
AP717 (55513-12)	1/4" NPT	8-1/4" (21.0 cm)	2-5/16" (5.9 cm)	0.77 lbs. (0.3 kg)	0.5 gpm (1.9 lpm)	1,500 gallons (5,678 liters)	100°F (37.8°C)	125 psi (862 kPa)	AP717	5 micron nominal

* Tested and verified by manufacturer's laboratory.



Aqua-Pure®

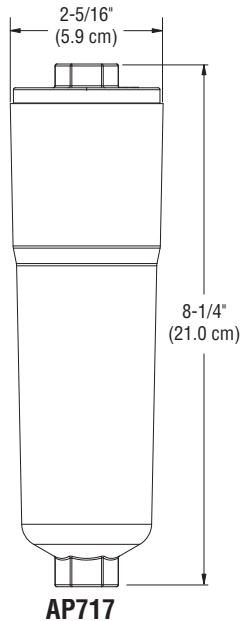

Spec # _____

Quantity _____

Model Number _____


Part Number _____

Physical Specifications:

- Standard 1/4" NPT inlet/outlet connections
- System is a single vessel design
- System is manufactured from FDA compliant materials
- System has maximum operating pressure of 125 psi (862 kPa) and operating temperature of 100°F (37.8°C)
- System packed with plumbing fittings and installation hardware
- System to be installed on refrigerator/ice-maker incoming cold water line

Easy Installation:

CAUTION: Diagram shown is for reference purposes only. Read installation and operation manual prior to installing the unit.

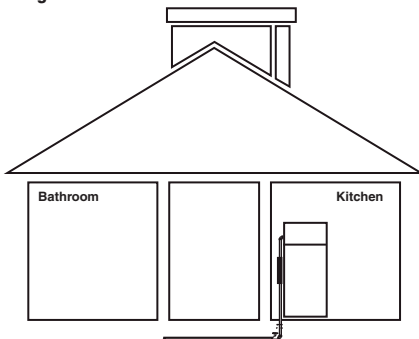

⚠ WARNING

To reduce the risk associated with the ingestion of contaminants:

- Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

CAUTION

To reduce the risk associated with property damage due to water leakage:

- **Read and follow** Use Instructions before installation and use of this system.
- The disposable filter cartridge **MUST** be replaced every six (6) months, at the rated capacity or sooner if a noticeable reduction in flow rate occurs.

Limited Warranty: 3M Purification Inc. warrants this Product will be free from defects in material and manufacture for one (1) year from the date of purchase: This warranty does not cover failures resulting from abuse, misuse, alteration or damage not caused by 3M or failure to follow installation and use instructions. No warranty is given as to the service life of any filter cartridge or membrane as it will vary with local water conditions and water consumption. **3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOMER OR USAGE OF TRADE.** If the Product fails to satisfy this Limited Warranty during the warranty period, 3M Purification Inc. will replace the Product or refund your Product purchase price. This warranty does not cover labor. **The remedy stated in this paragraph is Customer's sole remedy and 3M Purification Inc.'s exclusive obligation.** For additional information, see the entire Limited Warranty located in the product Installation and Operating Instruction Manual.

Limitation of Liability. 3M Purification inc. will not be liable for any loss or damage arising from this 3M Purification Inc. product, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability. Some states and countries do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Distributed by:

3M

3M Purification Inc.
400 Research Parkway
Meriden, CT 06450 U.S.A.
Toll Free: 800-222-7880
Worldwide: 203-237-5541
Fax: 203-238-8701
www.aquapure.com • www.3mpurification.com



Visit www.nsf.org for the claims associated with products that are NSF listed.

3M is a trademark of 3M Company.
Aqua-Pure is a trademark of 3M Company used under license.
NSF is a trademark of NSF International.
© 2011 3M Company. All rights reserved.
70-0201-9272-3 REV 0111