

W Series

Wound Depth Cartridges

Premium Series



Residential / Commercial / Industrial Filtration Applications

Standard Features

- Suitable for filtration of liquids, compressed air and gases
- Precision winding patterns ensure accurate filtration ratings and high retention efficiencies
- Cost effective and proven versus spun-bond, melt blown and resin-bonded filter cartridges
- High dirt-holding capacity
- Reduces sand, silt, rust and scale particles
- Polypropylene and cotton elements are FDA acceptable under CFR Title 21 for food and potable water contact
- Filters available in standard 2-1/2" and 4-1/2" (BB-style) cartridge diameters

Product Specifications

Micron Sizes

1, 5, 10, 20, 30, 50, 75, and 100 microns

Nominal Lengths

9-7/8", 20", 30", and 40"

Custom lengths available upon request

Inside and Outside Diameters

1" ID, 2-1/2" and 4-1/2" OD

Maximum Operating Temperature

Standard Polypropylene Core Media good for 180° F (82° C) temperature limit*

High temperature cartridges are available

Recommended Change-Out Differential Pressure

20 psid (1.4 bar)

Materials of Construction

Filter Media: FDA Polypropylene

Core: Polypropylene

Note:

2-1/2", 4-1/2" OD by 9-7/8" L and 20" L cartridges are wrapped

30" and 40" L cartridges are not wrapped

FDA AND USP COMPLIANCE

FDA Polypropylene filters are manufactured with materials that comply with FDA requirements for food contact per CFR Title 21Core: Polypropylene End Caps: Vinyl Plastisol.

* Temperature limits vary and depend on pressure and time under load.

Applications

- 1 Component Wash Fluids
- 2 Coolants
- 3 Cutting Fluids
- 4 Fuels
- 5 Light Oil
- 6 Aqueous Solutions
- 7 Water
- 8 Water Glycols
- 9 Mineral and Synthetic Oils
- 10 Lubricants
- 11 Solvents


Ordering Guide (Example: WPP-25098-20-TP226FL-S)

W	PP	- 25	098	- 20	- T	226FL -	S
WOUND	MEDIA	CARTRIDGE DIAMETER	CARTRIDGE LENGTH	MICRON RATING	CORE MATERIAL	END CAP	GASKET
W = Standard	PP = Polypropylene SC = Cotton GF = Glass Fiber	25 = 2.5" 45 = 4.5"	098 = 9-7/8" 200 = 20" 300 = 30" ** 400 = 40" **	1 5 10 20 30 50 75 100	Blank = Polypropylene (Standard)	Blank = DOE (Standard) 222/flat = 222FL 222/fin = 222FN 222/spring = 222s 226/flat = 226FL 226/fin = 226FN 226/spring = 226s SOE/flat = SOEFL SOE/fin = SOEFN SOE/spring = SOEs Z = Custom	B = Buna (Standard) V = Viton® T = Teflon® S = Silicone N = Neoprene E = EPDM

*Only DOE end caps are available for the 4.5" diameter cartridge.

**No wrap on 30" or 40" lengths.

Dimensions

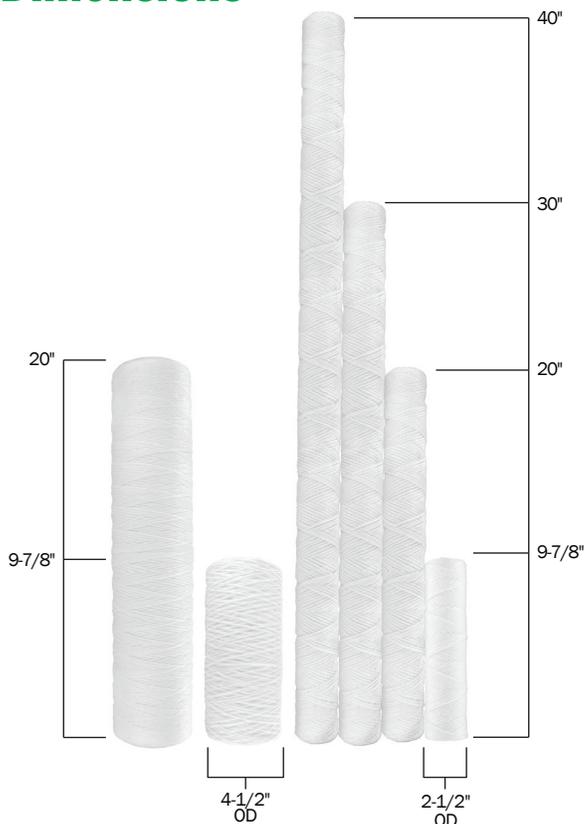

Available End Cap Configurations



All Illustrations © Copyright 2014 NeoLogic Solutions. All Rights Reserved.

Case Packs

DIMENSIONS	QUANTITY
2-1/2" x 9-7/8"	50
2-1/2" x 20"	25
2-1/2" x 30"	25
2-1/2" x 40"	25
4-1/2" x 9-7/8"	12
4-1/2" x 20"	6

Distributed By:



2299 Ridge Rd., Greenville, SC
P: 888.859.1188 · F: 864.284.1819
NeoLogicSolutions.com · Info@NeoLogicSolutions.com

Questions?

Ask our Service Representatives at:
888.859.1188 Mon.-Fri. 8a-8p,
Sat 8:30a-4:30p EST.