


YOUR PLUMBING'S BEST CONNECTION

neofit

www.neologicsolutions.com

Two Way Divider

| Pressure Ratings | | | |
|------------------|---------|---------|---------|
| | < 5/16" | 3/8" | 1/2" |
| 33 °F | 290 psi | 232 psi | 203 psi |
| 68 °F | 290 psi | 232 psi | 203 psi |
| 150 °F | 232 psi | 203 psi | 116 psi |

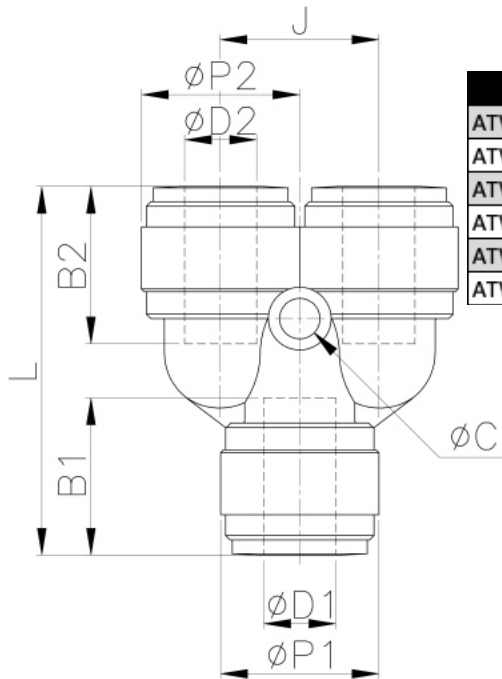

| Model | ØD1 | ØD2 | B1 | B2 | ØP1 | ØP2 | L | J | ØC | WEIGHT(g) |
|----------|------|------|-------|-------|-------|-------|-------|-------|-------|-----------|
| ATWDZ5Z5 | 5/32 | 5/32 | 0.579 | 0.579 | 0.543 | 0.543 | 1.327 | 0.531 | 0.130 | 6.7 |
| ATWD33 | 3/16 | 3/16 | 0.591 | 0.591 | 0.543 | 0.543 | 1.343 | 0.531 | 0.130 | 6.8 |
| ATWD44 | 1/4 | 1/4 | 0.665 | 0.665 | 0.610 | 0.610 | 1.528 | 0.610 | 0.130 | 8.8 |
| ATWD55 | 5/16 | 5/16 | 0.689 | 0.689 | 0.693 | 0.693 | 1.614 | 0.693 | 0.177 | 11.8 |
| ATWD66 | 3/8 | 3/8 | 0.795 | 0.795 | 0.787 | 0.787 | 1.827 | 0.787 | 0.177 | 16.7 |
| ATWD88 | 1/2 | 1/2 | 0.988 | 0.988 | 0.906 | 0.906 | 2.236 | 0.906 | 0.177 | 25.1 |