

## EFS8002-S Filter Cartridge

## S P E C I F I C A T I O N S

Overall Dimensions: 14"H x 4"W x 4"D

Inlet connection: 3/8" FPT

Outlet connection: 3/8"


Service Flow Rate: Maximum 1.5 gpm (5.7 Lpm)

Pressure Requirements: 10 - 125 psi (0.7 - 8.6 bar), non-shock

Temperature: 35 - 100°F (2 - 38°C)

No electrical connection required

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

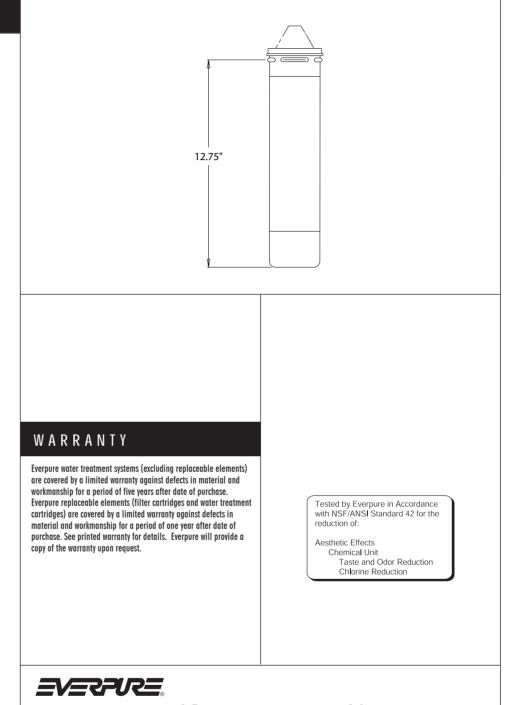

EVERPURE, INC. 2375 Sanders Road Northbrook, IL 60062 Toll Free (800) 323-7873 Tel (847) 205-6000 Fax (800) 942-0081 http://www.everpure.com In Europe: N.V. EVERPURE (EUROPE) S.A. Geldenaaksebaan 478 B - 3001 Heverlee Belgium Tel 32 - 16 - 401191 FAX 32 - 16 - 402691 In Japan: EVERPURE JAPAN, INC. I-8-19, Tsumada Kita, I-Chome, Atsugi City Kanagawa Ken 243-0812 Japan Tel 81-462-23-6563 FAX 81-462-21-6775

Everpure, Inc. 2375 Sanders Road Northbrook, IL 60062 Phone: 800-323-7873 Fax: 800-942-0081