

Aqua-Pure®

Models:

AP801 / AP801-C

Whole House Water Filters

Spec # _____

Quantity _____

Applications:

- Sediment & Rust¹
- Chlorine Taste & Odor¹

¹Depending on replacement cartridge used. Please see the chart on page 2 for details.

At a Glance:

- Unrestricted flow designed with 1" NPT connections
- Ideal for larger homes and commercial applications



AP801 / AP801-C

Product Benefits:


- 1" inlet and outlet connections for easy installation and high flow rates
- Designed with built-in pressure relief for convenient cartridge change-out
- Accepts rigid AP800 Series sediment cartridges for high filtration efficiency and sediment capacity
- Accepts carbon AP817 cartridges for efficient chlorine taste and odor reduction
- Complete Series² includes an installation kit for easy and convenient installation (AP801-C)
- Aqua-Grip filter wrench included for fast and easy housing sump removal for changing cartridges
- Manufactured from FDA CFR-21 compliant materials
- Limited Warranty with superior factory support

Product Specifications:

Model No. (Part No.)	Inlet/ Outlet Size	Dimensions		Approx. Weight	Flow Rate	Temp. Range	Pressure Range	Std. Replacement Ctg. No.	Degree of Filtration
		Height	Diameter						
AP801 (55857-01)	1" NPT	13-15/16" (35.4 cm)	7-1/4" (18.4 cm)	5.5 lbs. (2.5 kg)	20 gpm (75.7 lpm)	40-100°F (4.4-37.8°C)	25-100 psi (172-690 kPa)	AP810 (not included)	5 micron nominal
AP801-C ² (55857-16)	1" NPT							AP810 (included)	

² "C" denotes Complete Series, includes housing, bracket, wrench and AP810 cartridge


Aqua-Pure®

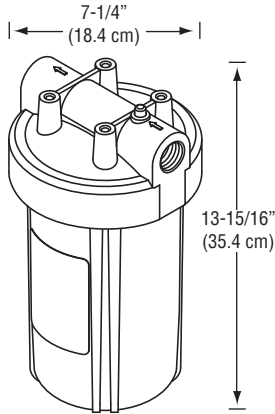

AP801 / AP801-C

Easy Installation:

CAUTION: Diagram shown is for reference purposes only. Read installation and operation manual prior to installing the unit.

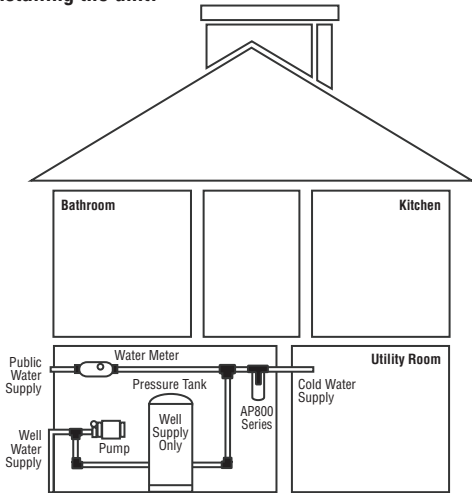

Spec # _____

Quantity _____

Model Number _____

Part Number _____

Specifications:

- 1" NPT inlet and outlet ports
- Systems are a single vessel design
- Systems are manufactured from FDA CFR-21 compliant materials
- Systems have a maximum operating pressure of 100 psi (690 kPa) and operating temperature of 100°F (37.8°C)
- System comes with mounting bracket, wrench and AP810 cartridge (AP801-C series only)
- Systems incorporate a pressure relief button

AP800 Series Replacement Cartridge Options

Sediment Model	Load	Nominal Micron Rating	Application		Max. Flow Rate
			Sediment/Rust	Chlorine Taste & Odor	
AP810	Normal	5	•		28 gpm (106 lpm)
AP811	Medium	25	•		28 gpm (106 lpm)
AP814	Heavy	50	•		28 gpm (106 lpm)
AP817	Normal	25	•	•	10 gpm (38 lpm)

⚠ WARNING: To reduce the risk associated with the ingestion of contaminants: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

CAUTION

To reduce the risk associated with property damage due to water leakage:

- Read and follow Use Instructions before installation and use of this system.

3M Purification Inc. recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold. **The disposable filter cartridge MUST be replaced every 6 months, at the rated capacity or sooner if a noticeable reduction in flow rate occurs.**

Limited Warranty:

3M Purification Inc. warrants this Product will be free from defects in material and manufacture for ten (10) years from the date of purchase. The filter cartridge or filter membrane is warranted to be free from defects in material and manufacture for one (1) year. This warranty does not cover failures resulting from abuse, misuse, alteration or damage not caused by 3M Purification Inc. or failure to follow installation and use instructions. No warranty is given as to the service life of any filter cartridge or membrane as it will vary with local water conditions and water consumption. **3M PURIFICATION INC. MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOMER OR USAGE OF TRADE.** If the Product fails to satisfy this Limited Warranty during the warranty period, 3M Purification Inc. will, at 3M Purification Inc.'s option, replace the Product or refund your Product purchase price. This warranty does not cover labor. **The remedy stated in this paragraph is Customer's sole remedy and 3M Purification Inc.'s exclusive obligation. For additional information, see the entire Limited Warranty located in the product Installation and Operating Instruction Manual.**

Limitation of Liability. 3M Purification Inc. will not be liable for any loss or damage arising from this 3M Purification Inc. product, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability. Some states and countries do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Distributed by:

3M

3M Purification Inc.
400 Research Parkway
Meriden, CT 06450 U.S.A.
Toll Free: 800-222-7880
Worldwide: 203-237-5541
Fax: 203-238-8701
www.aquapure.com • www.3mpurification.com

3M is a trademark of 3M Company.
Aqua-Pure is a trademark of 3M Company used under license.
© 2011 3M Company. All rights reserved.
LITAP801
70-0201-9288-9 REV 1011