



CGAC-10
CARTRIDGE

CGAC-10

CGAC-10 GRANULAR ACTIVATED CARBON CARTRIDGE

- Effective chlorine taste & odor and chloramine taste & odor reduction*
- Advanced carbon media
- Designed for maximum adsorption
- Post-filter to reduce carbon fines

CGAC-10 cartridge effectively reduces unwanted tastes, odor and chlorine taste & odor from your drinking water, including chloramine taste & odor.*

This cartridge features a unique advanced carbon media that is much more effective than standard granular carbons for reduction of chloramine taste & odor.

The construction of the cartridge allows water to enter at one end and pass through the entire length of the carbon bed before exiting the other end of the cartridge. An internal expansion pad minimizes channeling or bypass. This design allows for maximum contact between the

water and carbon, ensuring maximum adsorption.

Before the water exits the cartridge, a 20-micron post filter helps reduce carbon fines and other suspended particles from the filtered water. The post-filter is permanently fastened to an innovative support basket ensuring that it is firmly secured and eliminating any potential for bypass.

* Based on manufacturer's internal testing.




PENTEK
FILTRATION

Pure Quality.™

CGAC-10

CGAC-Series Granular Activated Carbon Cartridges

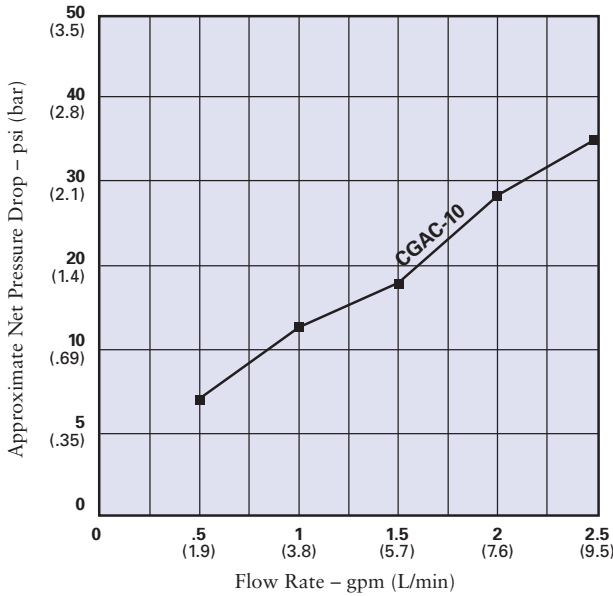

This CGAC-10 is Tested and Certified by NSF International to NSF/ANSI Standard 42 for material requirements only.

Cartridge Specifications and Performance Data

Model	Maximum Dimensions	Initial ΔP (psi) @ Flow Rate (gpm)	Chlorine Taste & Odor Reduction* @Flow Rate (gpm)	Chloramine Taste Odor Reduction*†
CGAC-10	2-7/8" x 9-3/4" (73 mm x 248 mm)	<20.00 psi @ 1.0 gpm (<1.38 bar @ 3.8 L/min)	30,000 gallons @ 1.0 gpm (113,500 liters @ 3.8 L/min)	1,750 gallons@ 1.0 gpm (6,624 liters @ 3.8 L/min) 3,500 gallons@ 0.5 gpm (13,250 liters @ 1.9 L/min)

* Based on manufacturer's internal testing.

† Chloramine taste & odor reduction tested at 1.0 gpm (3.8 L/min), 3 ppm reduced to <0.5 ppm.

Materials of Construction

• Filter Media	Advanced Carbon	• Expansion Pad	Polypropylene
• End Caps	Polystyrene	• Gasket	Buna-N (top) Santoprene (bottom)
• Post-filter	Spun Polypropylene	• Temperature Rating	40°F to 125°F (4.4° C to 51.7°C)
• Outer Casing	Polystyrene		

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: A drinking water cartridge may contain carbon fines (very fine black powder). After installation and before using the water, flush the cartridge for 5 minutes to remove fines.

NOTE: It is recommended that you run the tap for 20 seconds prior to using the water for drinking or cooking purposes.



502 Indiana Avenue • P.O. Box 1047 • Sheboygan, Wisconsin 53082-1047

Customer Service: 800-645-0267 • Fax: 888-203-7361 • supportspecialist@pentekfiltration.com
International: 920-457-9435 • Fax: 920-457-2417 • international@pentekfiltration.com

www.pentekfiltration.com



Printed in U.S.A. 01/04 310072

