

AGAINST-A-WALL OR
FREE-STANDING

P8FA, P14FA

Suggested Specification

Cabinet finish shall be Sandstone powder coated paint on galvanized steel or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall be listed by Underwriters' Laboratories to U.S. and Canadian standards and conform to European Union Directives.

Models

P8FA delivers 8 gph of chilled drinking water
P14FA delivers 14 gph of chilled drinking water

Standard Features

- > Waterways are Lead-free in Materials and Construction
- > Dial-A-Drink® Bubbler
- > Stainless steel top
- > Heavy-gauge steel cabinet with separate galvanized steel base
- > High-efficiency cooling tank and coil.
- > Refrigerant R-134a
- > Limited 5-year warranty

Finishes

- > Standard Cabinet Finish: Sandstone powder coated paint on galvanized steel
- > Optional finishes (at additional cost): Stainless Steel and optional powder coated finishes.

Installation

- > Prior to roughing-in, consult local, state and federal codes
- > Shipped with complete instructions

Options

- Push Handle glassfiller 029603-004
- Push Back glassfiller 029603-005
- Push Down glassfiller 029603-006
- 031505-001 required for Field Installation of glassfillers (except Model PLF8FAH, PLF14FAH)
- Foot pedal operated

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most components parts. Detailed warranty certificate enclosed with each water cooler; sample copy available upon request.

Export Warranty: One year on sealed refrigeration system and most parts. Detailed warranty certificate enclosed with each water cooler; sample copy available upon request.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of ≤0.25%) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953).

Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards and European Union Directives.

Components in this cooler are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.



Oasis International Product
Certified by NSF to
NSF/ANSI Standard 61, G


Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot 'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Options	Net Wt. Approx.
	Cooling Capacity GPH (LPH)	Base Rate GPH (LPH)	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
P8FA	8.0	8.0	No	No	1/5	4.6	320	Yes	Yes	94 Lbs.
P14A**	14.0	8.0	Yes	No	1/5	4.6	320	Yes	Yes	96 Lbs.

Specifications subject to change without notice

* Industry Standard Rating Condition 80°F inlet water temperature.

** Special export models available, operable on 220-240 volts, 50/60 Hertz. cULus certification not applicable.

OASIS™ AGAINST-A-WALL WATER COOLER MODELS P8FA, P14FA

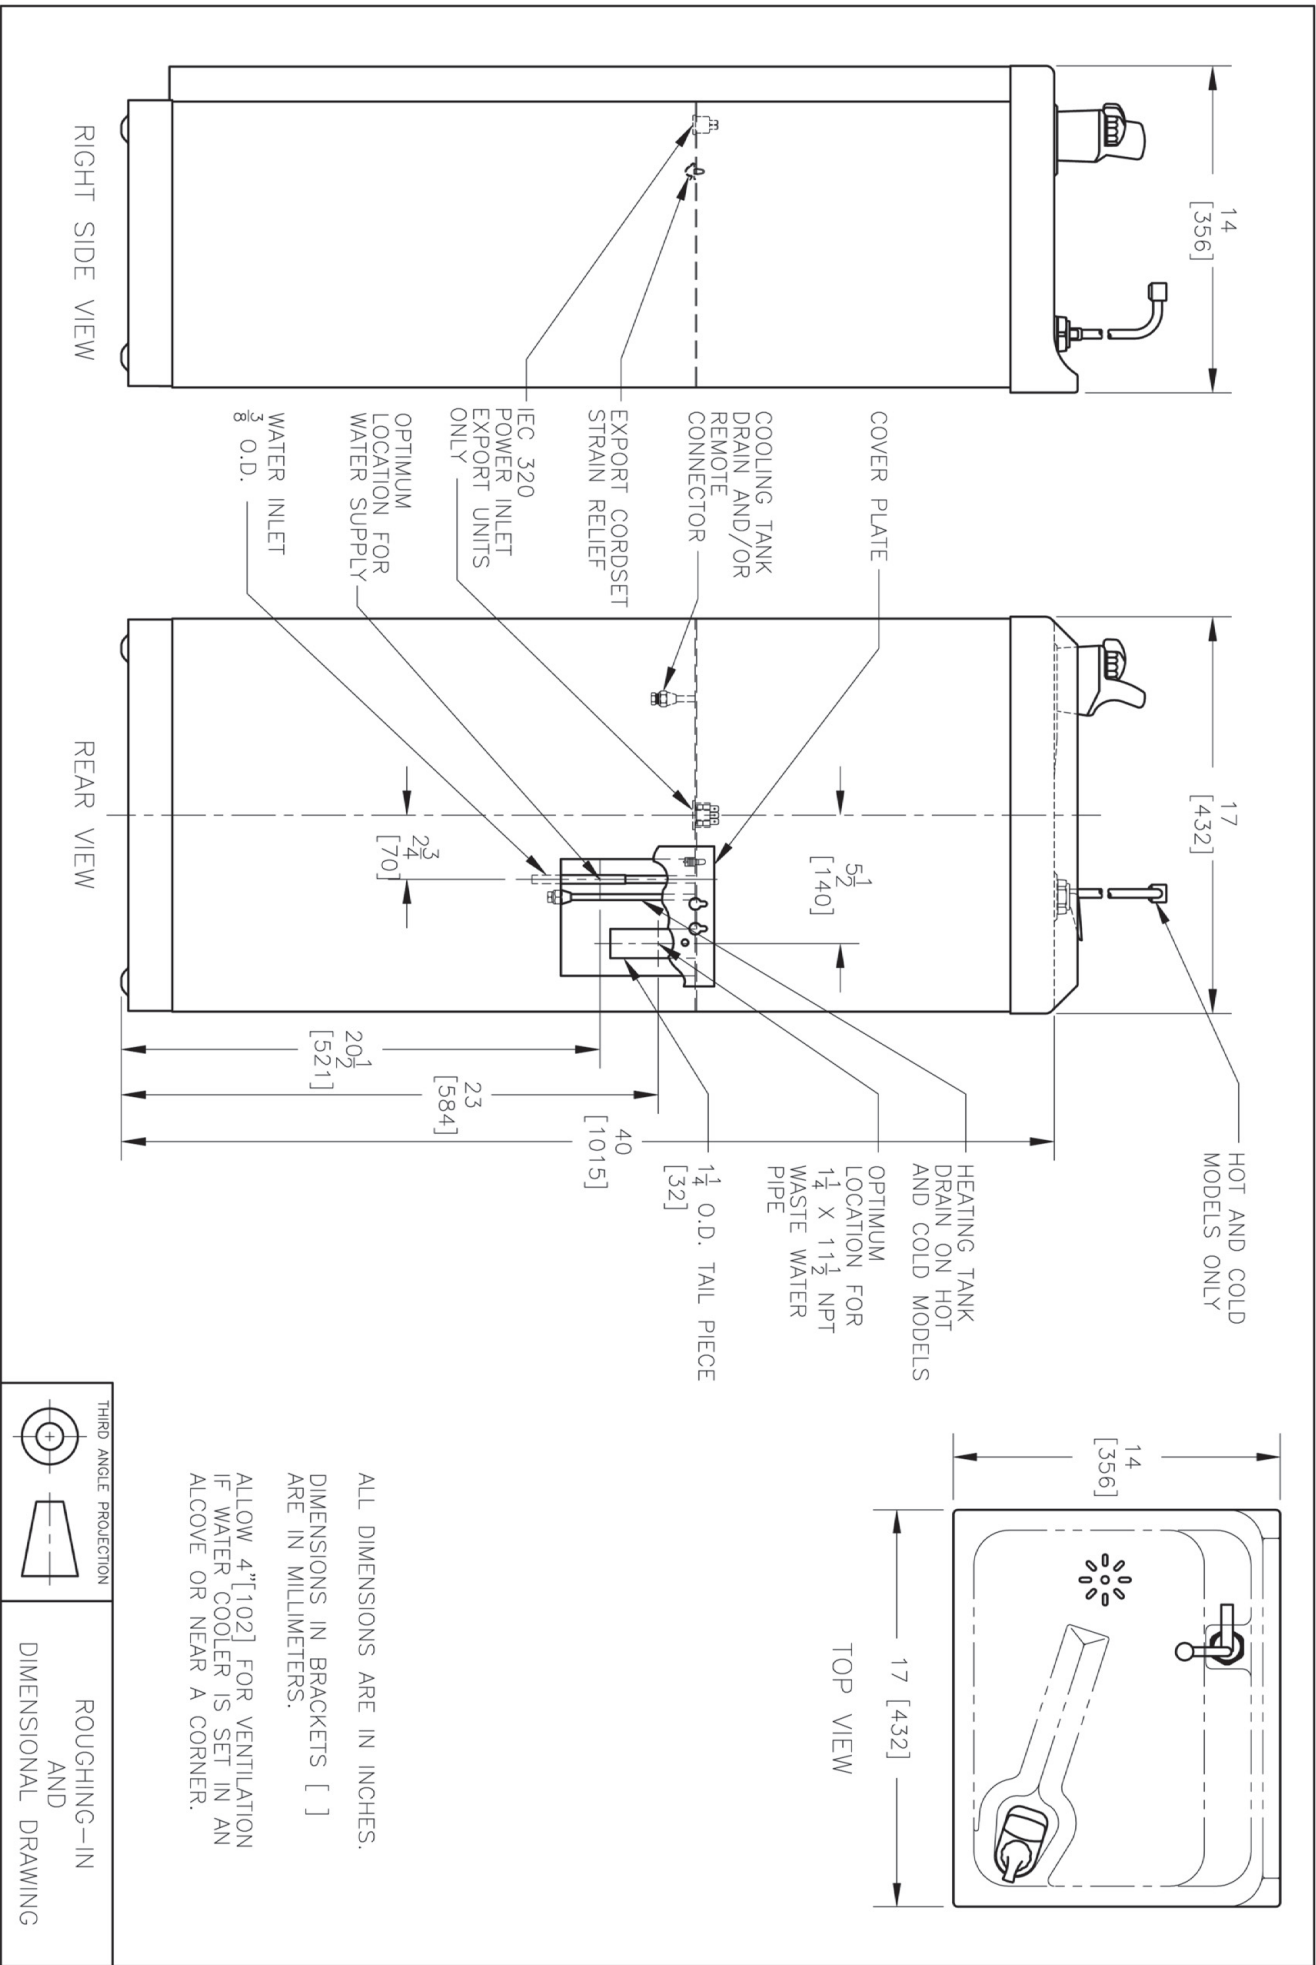

ALL DIMENSIONS ARE IN INCHES.
 DIMENSIONS IN BRACKETS []
 ARE IN MILLIMETERS.
 ALLOW 4" [102] FOR VENTILATION
 IF WATER COOLER IS SET IN AN
 ALCOVE OR NEAR A CORNER.

<p>THIRD ANGLE PROJECTION</p>	<p>ROUGHING-IN AND DIMENSIONAL DRAWING</p>
-------------------------------	--