

Click-to-Lock™ Products


Finish jobs faster

Our Click-to-Lock Range has been designed with an audible click and visible alignment arrows to assure installers that a fitting is secure. Fittings are ideal for use in water softener/conditioner systems and virtually any OEM type of application involving joining solutions.

Click-to-Lock fittings have a collet with stainless steel teeth that grip the pipe when fully inserted, and an O-ring to provide a permanent, leak-proof seal.


When twisted into place, the locking cap locks the pipe in place securely. No special tools, soldering, clamps or glue are ever required. Fittings reduce installation times by more than 40% and are code-approved for behind-the-wall use.

How to make a Click-to-Lock™ connection

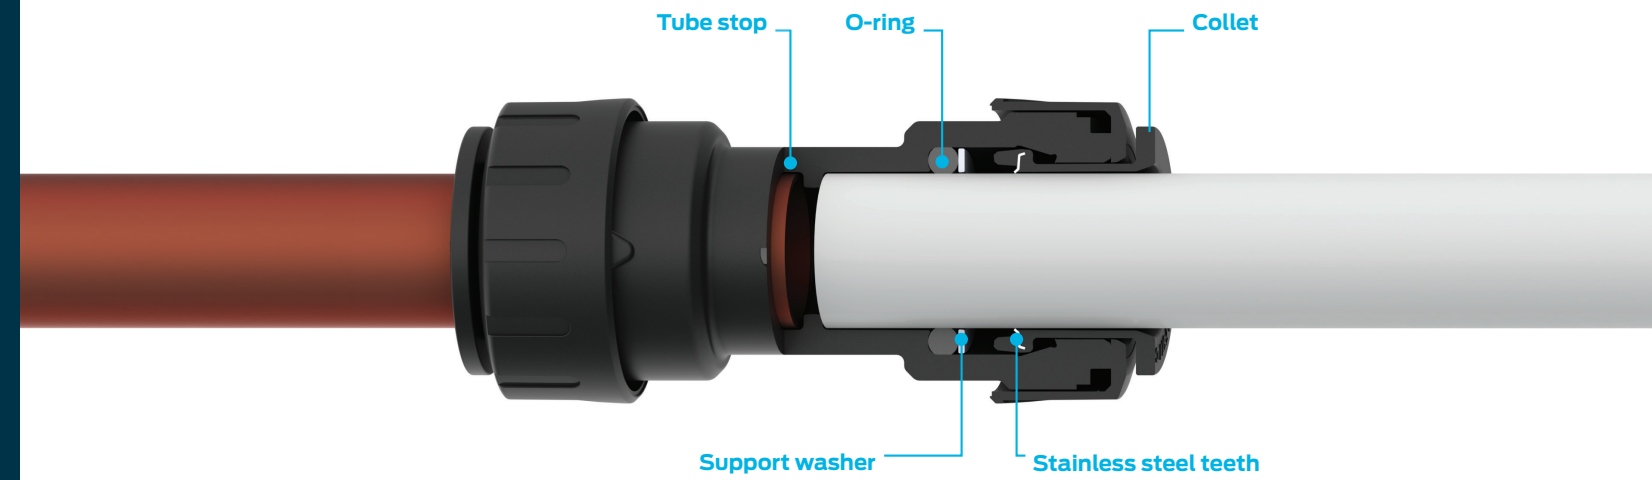


To connect

Keep product clean until ready to use. Always pressure test before use.

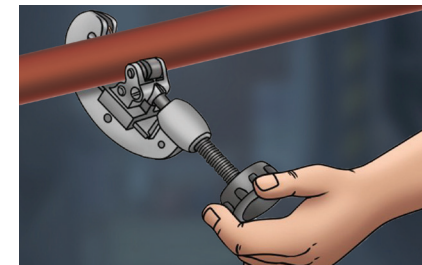


Step 1

Cut the pipe square using a copper pipe cutter. Remove all burrs and sharp edges.

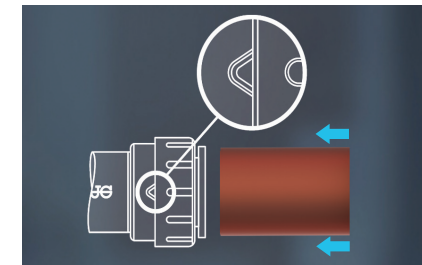

Step 2


Insert pipe fully into fitting.

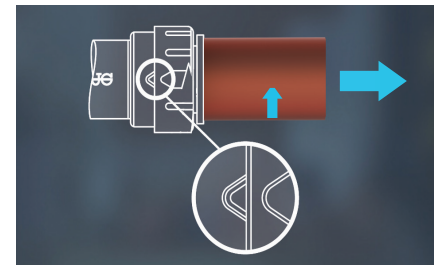

Step 3

Turn locking cap quarter turn clockwise to locked position. Once locked, there will be an audible click and indicator marks will be in alignment.

To disconnect

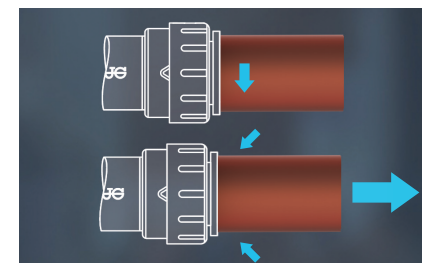

Step 1

Depressurize the system. Turn locking cap quarter turn counter clockwise. Depress collet against the fitting and remove pipe.