



WHOLE-HOUSE WATER FILTER

Models:

AP1610SS, AP2610SS

Applications:

Dirt/Rust

AP1610SS



- 3/4" NPT
- 8 gpm (30.3 lpm)
- Hot or Cold Water
- Heavy-duty 304 stainless steel housing rated to 300 psi (2,069 kPa)
- 316 Stainless Steel Head
- Premium performance Graded-Density sediment cartridge
- Hot and cold water applications

AP2610SS



- 3/4" NPT
- 16 gpm (60.6 lpm)
- Hot or Cold Water

Made from FDA*
CFR-21 Compliant
Materials

*Food and Drug Administration of USA

Features:

- ▶ Heavy-duty 316 Stainless Steel Head and 304 stainless steel housing rated to 300 psi (2,069 kPa) maximum operating pressure
- ▶ Premium performance AP110 Graded-Density depth cartridge
- ▶ High temperature rating to 100°F (38°C) if used in conjunction with a graded density resin bonded cartridge
- ▶ 3/4" unrestricted flow design
- ▶ Made from FDA CFR-21 compliant materials
- ▶ "Sure-Seal" ring nut connector with tightening tool
- ▶ High flow, dual cartridge AP2610SS model
- ▶ Ten Year Limited Warranty

Benefits:

- ▶ Maximum strength and durability with very high operating pressure rating, especially suitable for applications where solenoid valves are used and frequent water hammer occurs
- ▶ Complete with high efficiency, long life cartridges
- ▶ For all hot and cold water applications, depending upon cartridge
- ▶ For high flow rates with minimal pressure drop
- ▶ Conforms to public health requirements for water purification, suitable for drinking and cooking water and all food applications
- ▶ Assures positive cartridge sealing and easy cartridge changes
- ▶ For high water demand applications; less frequent cartridge changes
- ▶ Guaranteed system design and long-term factory support service

The Choice of the Professional Plumber™


Specifications

Model No.	Inlet/Outlet Size	Dimensions		Approx. Weight	Clean Pressure Drop	Maximum Flow Rate	Maximum Water Temp.	Maximum Water Pressure	Standard Replacement CTG No.	Replacement CTG Qty.	Degree of Filtration
		Height	Maximum Diameter								
AP1610	3/4" NPT	12 7/32" (31 cm)	4 5/32" (10.6 cm)	6 lbs (2.7 kg)	2 psi @ 8 gpm (13.8 kPa @ 30 lpm)	8 gpm (30.3 lpm)	100°F (38°C)	300 psi (2,070 kPa)	AP110	1	5 micron nominal
AP2610	3/4" NPT	22 1/32" (56 cm)	4 5/32" (10.4 cm)	7 lbs (3.1 kg)	4 psi @ 16 gpm (27.6 kPa @ 61 lpm)	16 gpm (60.6 lpm)	100°F (38°C)	300 psi (2,070 kPa)	AP110	2	5 micron nominal

Capacity : Cartridges should be replaced every 3 - 4 months or sooner when noticeable pressure drop occurs.

Premium Performance Filtration

Graded-Density Cartridge Construction for Longer Life!

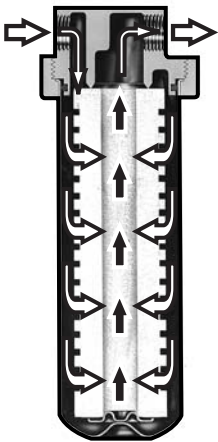

Aqua-Pure® Dirt & Rust Cartridges are made from an exclusive process using pure white cellulose fibers. This unique process offers unsurpassed filtration performance.

- **Longer Life**
- **Higher Efficiency**

As water passes from outer surfaces into the center of the cartridge, the filtering pores become increasingly smaller to remove even microscopic particles! Unlike string-wound and pleated paper cartridges, the rigid sturdy construction of **Aqua-Pure** cartridges are able to withstand high pressure drop and stressful conditions such as water hammer.

- **Rigid Construction**
- **Resists Water Hammer**




Replacement Cartridge Options

Dirt Model	Load	Nominal Micron Rating	Application			Flow Rate
			Dirt/Rust	Taste/Odor	Scale	
AP1001	Extra Fine	1	•			8 gpm (30.3 lpm)
AP1003	Fine	3	•			8 gpm (30.3 lpm)
AP110	Normal	5	•			8 gpm (30.3 lpm)
AP111	Medium	25	•			8 gpm (30.3 lpm)
AP124	Heavy	50	•			8 gpm (30.3 lpm)
AP117*	Normal	5	•	•		3 gpm (11.4 lpm)
APS117*	Normal	5	•	•	•	3 gpm (11.4 lpm)
AP420*	Normal	5	•		•	8 gpm (30.3 lpm)

* For cold water use only.

Easy Installation

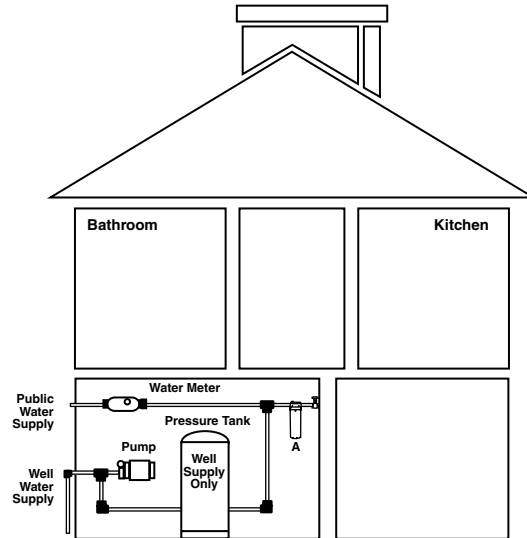


Your new **Aqua-Pure** Water Filter installs on the cold water line at the point-of-use, or main water line. Complete installation instructions are included for your convenience.

Tools required for installation:


- Tube Cutter
- Teflon® Tape
- Adjustable Wrench
- Appropriate Pipe Fittings

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.


Typical Filter Efficiency

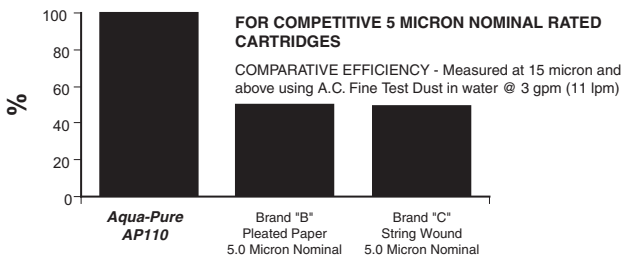

Typical Filter Life

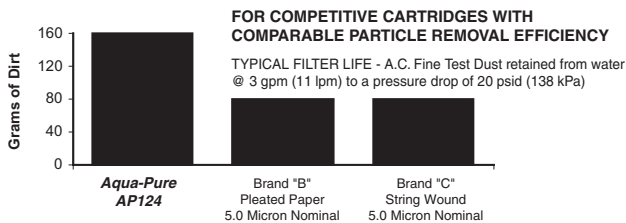

Typical Filter Life

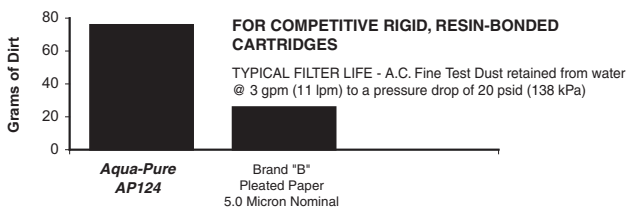

LITAP1610 0201

Teflon is a registered trademark of E.I. DuPont.



CUNO Incorporated

400 Research Parkway
Meriden, CT 06450 U.S.A.
Toll Free : 1-800-222-7880
Worldwide : 203-237-5541
Fax : 203-238-8701

www.aquapure.com • www.cuno.com