


## FILTRATION PROCESS

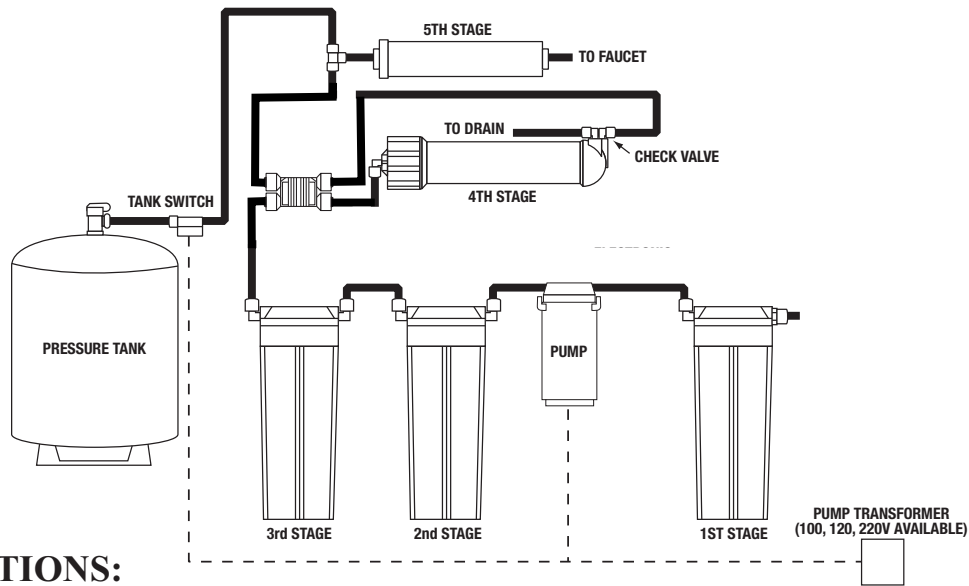

### SPECIFICATIONS:

1st stage: Sediment filter, 5 micron, 10"

2nd stage: Carbon filter, 10 micron, 10"

3rd stage: Carbon filter, 10 micron, 10"

4th stage: TFC membrane, 50GPD

5th stage: Inline carbon filter

Auto shut off valve

Operating pressure: 10-90 PSI

Operating temperature: 40-100°F

## REPLACEMENT PARTS

Part #	DESCRIPTIONS	SERVICE LIFE
3u/Uci g	Sediment filter, 5 micron, 10"	6-12 months
4pf "Uci g	Carbon block filter, 32 micron, 10"	6-12 months
5tf "Uci g	Carbon block filter, 32 micron, 10"	6-12 months
6j "Uci g	TFC membrane, 72GPD	24-36 months
7j "Uci g	Inline carbon filter	12-18 months