

S

F50


ShinMaywa

MODEL : 50CR2. 15S

BORE	OUT PUT		POLES	RPM	PHASE	VOLTAGE	HZ	RATED AMPERAGE	STARTING AMPS	STARTING METHOD	INS. CLASS	SOLIDS DIA.
	HP	KW										
2" (50mm)	1/5	0.15	2	3358	1	115	60	3.0	10.41	Capacitor Run	E	1 1/4" (35mm)

MODEL : 50CR2. 15T

BORE	OUT PUT		POLES	RPM	PHASE	VOLTAGE	HZ	RATED AMPERAGE	STARTING AMPS	STARTING METHOD	INS. CLASS	SOLIDS DIA.
	HP	KW										
2" (50mm)	1/5	0.15	2	3359	3	230	60	1.1	5.47	DIRECT	E	1 1/4" (35mm)

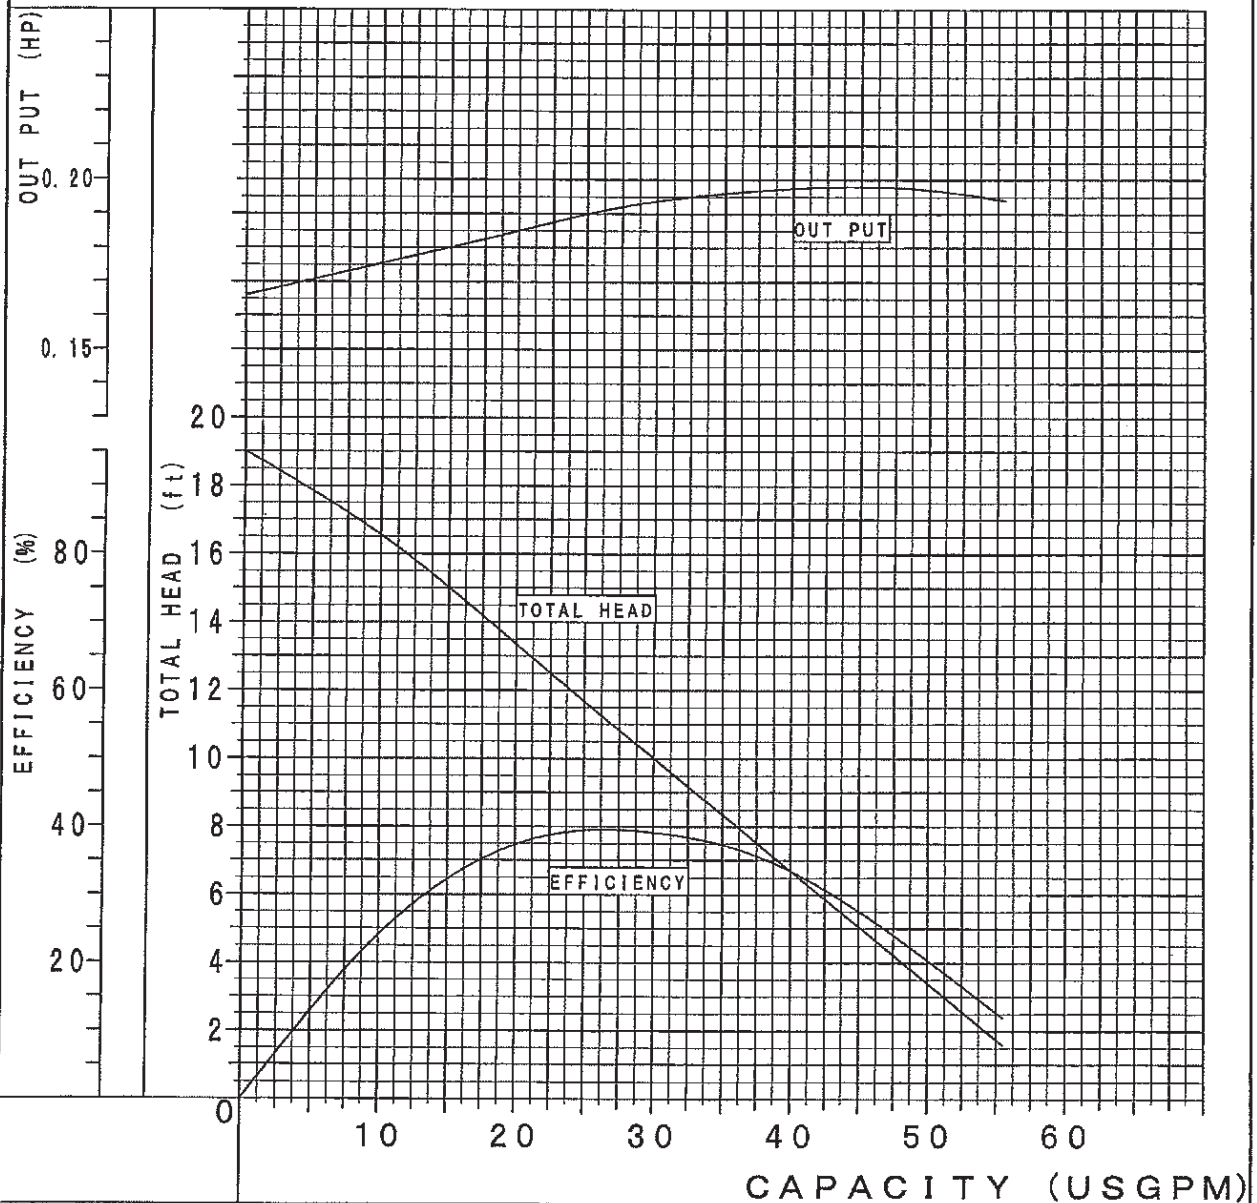

DWG.

..

TITLE

DWG No.

JUDG.

..

PERFORMANCE CURVE

Y31941

APPD.

..

ShinMaywa Industries, Ltd.