


# Union Connector

YOUR PLUMBING'S BEST CONNECTION



Pressure Ratings			
	< 5/16"	3/8"	1/2"
<b>33 °F</b>	290 psi	232 psi	203 psi
<b>68 °F</b>	290 psi	232 psi	203 psi
<b>150 °F</b>	232 psi	203 psi	116 psi

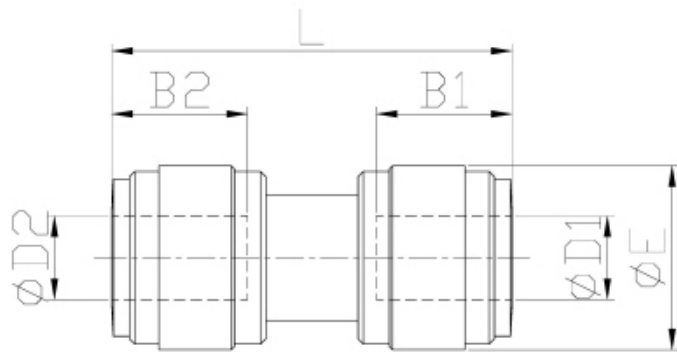

Model	ØD1	ØD2	B1	B2	ØE1	ØE2	L	WEIGHT(g)
AUCZ5Z5	5/32	5/32	0.579	0.579	0.520	0.520	1.252	3.8
AUC33	3/16	3/16	0.591	0.591	0.543	0.543	1.280	4
AUC44	1/4	1/4	0.665	0.665	0.610	0.610	1.425	5.2
AUC46M	1/4	06	0.665	0.634	0.610	0.610	1.425	5.3
AUC5Z5	5/16	5/32	0.689	0.579	0.693	0.693	1.441	6.5
AUC54	5/16	1/4	0.689	0.665	0.693	0.693	1.449	6
AUC55	5/16	5/16	0.689	0.689	0.693	0.693	1.504	6.9
AUC63	3/8	3/16	0.795	0.591	0.787	0.543	1.516	8.8
AUC64	3/8	1/4	0.795	0.665	0.787	0.610	1.657	9.9
AUC65	3/8	5/16	0.795	0.689	0.787	0.787	1.673	9.9
AUC66	3/8	3/8	0.795	0.795	0.787	0.787	1.689	9.7
AUC85	1/2	5/16	0.988	0.689	0.929	0.693	2.047	16.7
AUC86	1/2	3/8	0.988	0.795	0.929	0.929	2.063	16.3
AUC88	1/2	1/2	0.988	0.988	0.929	0.929	2.094	14.6