

# Hose Connector

**Eas to connect ush-fit hose connection  
a a tor**

## Overview


Speedfit plastic push-fit hose connector adaptor that easily connects plastic or copper pipes. Simply push the fitting onto pipe. To demount the connection, push the collet towards the body of the fitting and pull the pipe to release.

The fitting is up to 40% faster to install than traditional methods and is easier to use in confined spaces by removing the need for hot works and tools.

Designed, manufactured and assembled in the UK.

## Features & Benefits

- Instant push-fit connection
- Install and demount in seconds without tools
- Safe flame-free installation, with no hot works, glue or flux
- Grip & Seal collet with stainless steel teeth and main O-Ring seal
- Non-toxic, resists corrosion and no scale build-up
- Compatible with plastic (inserts required) or copper pipes
- Suitable for hot and cold water only (not suitable for central heating systems)

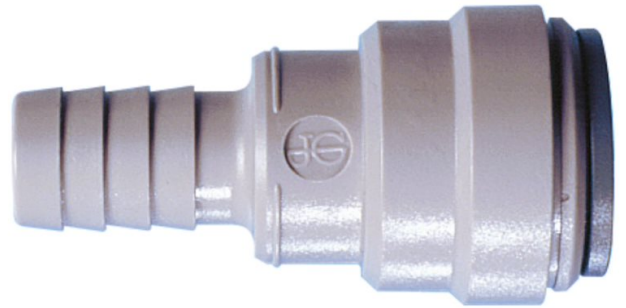

Product code	Description	Size	Pack QTY
<b>NC448</b>	Hose Connector	15mm x 1/2"	1000
<b>NC473</b>	Hose Connector	22mm x 3/4"	500
<b>NC737</b>	Hose Connector	22mm x 1/2"	400



50 year guarantee when used with  
JG Speedfit Layflat PB and PEX  
Barrier Pipes

# Hose Connector

## Working parameters & specifications

Application	Usual working temperature °C	Maximum working temperature °C	Maximum working pressure, bar
Cold Water (indirect and direct mains)	20	20	10
Hot Water (including unvented cylinders)	65	65	6


## Materials

Body	Polyacetal (Unfilled), Light Grey
O-Ring	Ethylene Polypropylene Diene Monomer (EPDM)
Collet	Polyacetal (Unfilled), Light Grey, Stainless Steel
Washer	Polyacetal (Unfilled), Natural
Caps	Polyacetal (Unfilled), Light Grey


## Dimensions – All measurements in mm unless otherwise stated

### NC448

\*With Collet in fully released position

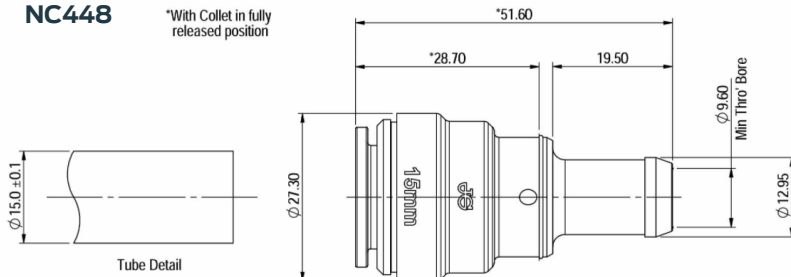


### NC473

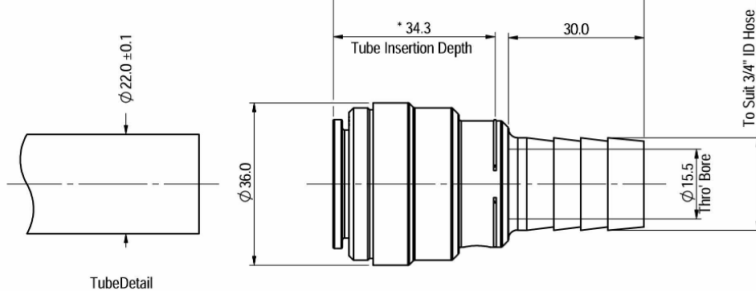

\* With Collet in Release Position

\*With Collets In Release Position

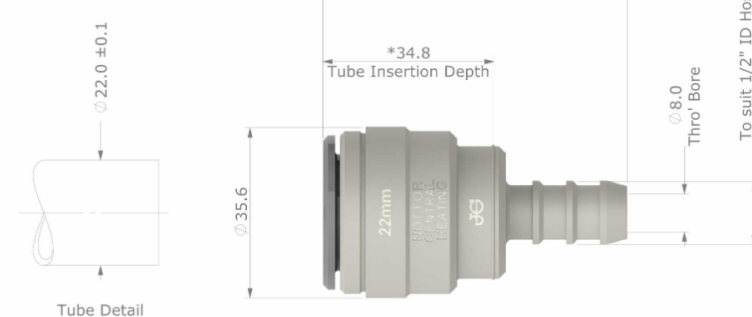

### NC737