

commercial elements

small size spiral-wound elements for commercial applications

SUEZ Commercial Elements are designed for light industrial or commercial applications. For cost optimization, they feature a tape outer wrap.

AG and AK Series are selected when high salts rejection is required. These elements are considered a standard in the industry.

AP Series operates at the lowest pressure results in significant energy savings.

HP Series is a nanofiltration element for partial water softening.

Table 1: Element Specification

Membrane	A-Series & H-Series, Thin-Film Membrane (TFM*)
----------	--

Model	Average permeate flow gpd (m ³ /day) (1)(2)	Average NaCl rejection (1)(2)	Minimum NaCl rejection (1)(2)
AG2521TM	300 (1.1)	99.5%	99.0%
AG3218TM	700 (2.6)	99.5%	99.0%
AG4021TM	1050 (3.9)	99.5%	99.0%

(1) Average salt rejection after 24 hours operation. Individual flow rate may vary +25%/-15%.

(2) Testing conditions: 2,000ppm NaCl solution at 225psi (1,551kPa) operating pressure, 25°C (77°F), pH 7.5 and 15% recovery.

Model	Average permeate flow gpd (m ³ /day) (1)(3)	Average NaCl rejection (1)(3)	Minimum NaCl rejection (1)(3)
AK2521TM	300 (1.1)	99.0%	98.0%
AK3218TM	700 (2.6)	99.0%	98.0%
AK4021TM	1050 (3.9)	99.0%	98.0%

(1) Average salt rejection after 24 hours operation. Individual flow rate may vary +25%/-15%.

(3) Testing conditions: 500ppm NaCl solution at 115psi (793kPa) operating pressure, 25°C (77°F), pH 7.5 and 15% recovery.

Water Technologies & Solutions fact sheet

Model	Average permeate flow gpd (m ³ /day) (1)(4)	Average NaCl rejection (1)(4)	Minimum NaCl rejection (1)(4)
AP2521TM	300 (1.1)	95.0%	92.0%
AP4021TM	1050 (3.9)	95.0%	92.0%

(1) Average salt rejection after 24 hours operation. Individual flow rate may vary +25%/-15%

(4) Testing conditions: 500ppm NaCl solution at 75 psi (520kPa) operating pressure, 25°C (77°F), pH 7.5 and 15% recovery.

Model	Average permeate flow gpd (m ³ /day) (1)(5)	Average NaCl rejection (1)(5)	Minimum NaCl rejection (1)(5)
HP4021TM	1050 (3.9)	98.0%	96.0%

(1) Average salt rejection after 24 hours operation. Individual flow rate may vary +25%/-15%.

(5) Testing conditions: 2000ppm MgSO₄ solution at 110psi (758kPa) operating pressure, 25°C (77°F), pH 7.5 and 15% recovery

Model	Active area ft ² (m ²)	Outer wrap	Part number
AG2521TM	13 (1.2)	Tape	1206719
AG3218TM	29 (2.7)	Tape	1206739
AG4021TM	42 (3.9)	Tape	1206750
AK2521TM	13 (1.2)	Tape	1206799
AK3218TM	29 (2.7)	Tape	1206803
AK4021TM	42 (3.9)	Tape	1206812
AP2521TM	13 (1.2)	Tape	3158782
AP4021TM	42 (3.9)	Tape	3158781
HP4021TM	42 (3.9)	Tape	3158299



info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289

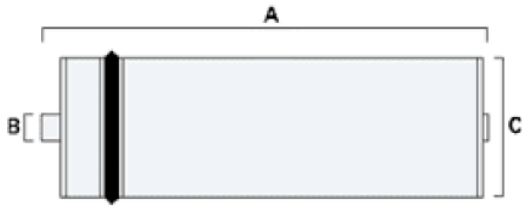


Figure 1: Element Dimensions Diagram – Male

Table 2: Dimensions and Weight

Model	Dimensions, inches (cm)			Boxed Weight lbs (kg)
	A	B	C	
**2521TM	21 (53.3)	0.75 (1.90)	2.4 (6.1)	2.1 (0.9)
**3218TM	18 (45.7)	0.75 (1.90)	3.2 (8.1)	2.4 (1.1)
**4021TM	21 (53.3)	0.75 (1.90)	3.9 (9.9)	3.3 (1.5)

Table 3: Operating and CIP parameters

Typical Operating Flux	10-20GFD (15-35 LMH)
Maximum Operating Pressure	400 psi (3,758 kPa)
Maximum Temperature	Continuous operation: 122°F (50°C) Clean-In-Place (CIP): 122°F (50°C)
pH Range	Optimum rejection: 7.0 – 7.5 Continuous operation: 3.0-10.0 Clean-In-Place (CIP): 1.0-13.0 ⁽¹⁾
Chlorine Tolerance	1000 ppm-hours, Dechlorination recommended
Feedwater	NTU < 1 SDI ₁₅ < 5

(1) Please refer to Cleaning Guidelines Technical Bulletin TB1194.

LENNTECH

info@lenntech.com Tel. +31-152-610-900

www.lenntech.com Fax. +31-152-616-289