


Male Elbow NPTF

Pressure Ratings			
	< 5/16"	3/8"	1/2"
33 °F	290 psi	232 psi	203 psi
68 °F	290 psi	232 psi	203 psi
150 °F	232 psi	203 psi	116 psi

Torque Allowance					
Thread Size	1/8"	1/4"	3/8"	1/2"	3/4"
Max Torque	1.1 ft lbs	1.1 ft lbs	2.2 ft lbs	2.2 ft lbs	2.9 ft lbs

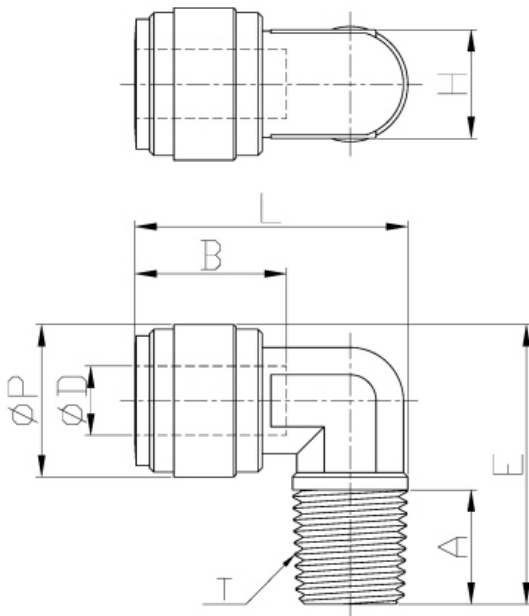

Model	ØD	ØP	T(NPTF)	A	B	E	H(inch)	L	WEIGHT(g)
AMEZ5-N1	5/32	0.610	1/8	0.358	0.579	1.039	7/16	1.000	4.9
AME3-N1	3/16	0.610	1/8	0.358	0.591	1.039	7/16	1.008	4.7
AME4-N1	1/4	0.610	1/8	0.358	0.665	1.039	7/16	1.008	4.2
AME4-N2	1/4	0.610	1/4	0.520	0.665	1.256	7/16	1.063	5.7
AME4-N3	1/4	0.610	3/8	0.543	0.665	1.287	7/16	1.138	7.1
AME5-N2	5/16	0.787	1/4	0.520	0.689	1.386	9/16	1.236	9
AME5-N3	5/16	0.787	3/8	0.543	0.689	1.409	9/16	1.319	10.3
AME6-N2	3/8	0.787	1/4	0.520	0.795	1.386	9/16	1.252	8.6
AME6-N3	3/8	0.787	3/8	0.543	0.795	1.409	9/16	1.335	9.9
AME8-N3	1/2	0.929	3/8	0.543	0.988	1.547	11/16	1.563	13.3
AME8-N4	1/2	0.929	1/2	0.701	0.988	1.705	11/16	1.634	16.2