


DM-3

Dual TDS Monitor 3



HM DIGITAL, Inc.

1210 E.223rd St., #321
Carson, CA 90745 U.S.A.
Phone no : 800-383-2777
info@HMDigital.com

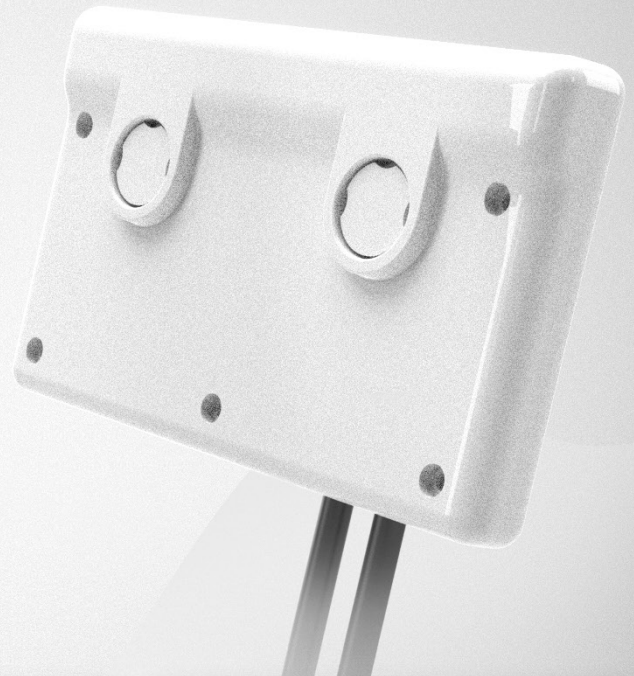

ALWAYS ON DUAL DISPLAY



EASY MAGNETIC MOUNT



SLIM PROFILE



Water
Quality
ASSOCIATION

ISO 9001
certified company

HMDigital.com



FEATURES

Displays TDS levels of the Feed Water (Line1) and Product Water (Line2) simultaneously.

Automatic Temperature Compensation Function (ATC)

Digital Calibration

Shielded Sensor Cables

Replaceable Sensors

The DM-3 is a commercial-grade TDS monitor measuring TDS feed (input) water vs. product (output) water of a water filtration system at any time. DM-3 has a large backlit screen that you will be able to see the readings in dark environments. With its shielded cables and diagnostic messaging this robust device is ideal for Reverse Osmosis(RO), Deionized water(DI) filtration systems that work well in applications such as drinking or potable water, Water treatment, Aquariums, Hydroponics, and many more.

SPECIFICATION

RANGE	EC: 0~9999 μ S/0~9.99mS / TDS: 0~5000ppm/ 0~5ppt
ACCURACY	\pm 2%
RESOLUTION	EC: 0.1 μ S (0~99.9); 1 μ S (100~999); 10 μ S (1000~9990); 0.01mS (0.00~9.99) TDS: 0.1ppm (0~99.9); 1ppm (100~999); 10ppm (1000~5000); 0.01 ppt (0.00~5.00)
ATC	YES (Auto Temperature Compensation)
CALIBRATION	Digital
SENSOR	1/4" (2EA)
SENSOR CABLE	1.2m /3.9ft
POWER	2 x AA
SIZE	11.6 x 1.9 x 7.0 cm (4.6 x 0.7 x 2.8 in)
WEIGHT	225g/ 7.9oz