

Neo-Pure® Contaminant Reduction* Includes:

- Atrazine
- Chlorine, Taste & Odor
- Mercury @ pH 8.5
- Asbestos
- Cysts
- Particulate Class I Particle
- Benzene
- Lead
- Size: ≥ 0.5 to $< 1\mu\text{m}$
- Carbofuran
- Mercury @ pH 6.5
- P-Dichlorobenzene

Application Guidelines - Water Supply Parameters

Service Flow	0.5 gpm (1.9 lpm)
Water Pressure	20-120 psi (138-827 kPa)
Water Temperature	33°F - 100°F (0.6°C - 37.8°C)
Rated Service Capacity	300 gallons (1,136 liters)

Systems must be installed and operated in accordance with manufacturer's recommended procedures and guidelines. Failure to do so may void warranty.

⚠ **WARNING:** Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.

CAUTION: To reduce the risk associated with property damage due to water leakage:

- Read and follow Use Instructions before installation and use of this system.
- Installation and use **MUST** comply with all state and local plumbing codes.
- Protect from freezing, remove filter cartridge when temperatures are expected to drop below 33° F (0.6° C).
- **Do not install on hot water supply lines.** The maximum operating water temperature of this filter system is 100° F (38° C).
- Do not install if water pressure exceeds 120 psi (827 kPa). If your water pressure exceeds 80 psi (552kPa), you must install a pressure limiting valve. Contact a plumbing professional if you are uncertain how to check your water pressure.
- Do not install where water hammer conditions may occur. If water hammer conditions exist you must install a water hammer arrester. Contact a plumbing professional if you are uncertain how to check for this condition.
- The disposable filter cartridge **MUST** be replaced every 6 months, at the rated capacity or if a noticeable reduction in flow rate occurs.
- Disposable cartridges are warranted for defects in material and workmanship only. Service life of disposable filter cartridges varies with local water conditions and is thus warranted.

*Based on manufacturer's internal testing.



Tested and certified by NSF International against NSF/ANSI Standard 42 for material safety and structural integrity only.

All company names are registered trademarks of their respective holders. Made in Korea. ©2017 NeoLogic Solutions

NEO-PURE®

Filtration Products

Refrigerator Filter Reduces Top Contaminants Including Lead!*

NP-HAF-CIN Compatibility:

Samsung®

- DA29-00020B

Sears® & Kenmore®


- 9101
- 46-9101




Procedure For Filter Cartridge Installation And Replacement.

neo·PURE[®]
Filtration Products

- 1** If you shut off the main water supply valve to the refrigerator, you can easily replace the filter cartridge. Hold the filter knob and turn the cartridge 1/4 turn to the left. (Due to impurities in the water, you may not be able to remove cartridge. Then hold the filter knob strongly and turn the cartridge 1/4 turn to the left.
- 2** Apply the month sticker to the cartridge as a reminder to replace the filter within 6 months and remove.
- 3** If it is hard to install filter cartridge due to high water pressure, please shut off the main water supply valve to the refrigerator first and replace the Cartridge. Align unlabeled side of filter with the indicator line so that it can be inserted into the filter cover. Turn the cartridge 1/4 turn to the right to lock it into place. You will feel a stop and the locked symbol should now be lined up with the indicator line.

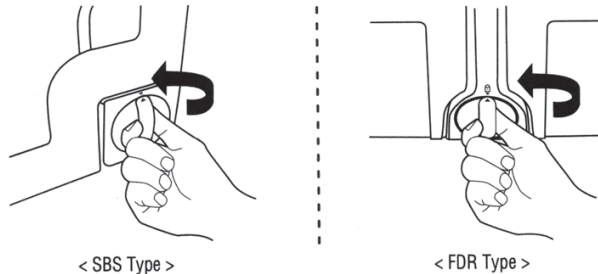

- 4** Turn on main water supply valve to the refrigerator first. Run water through the dispenser for 6 minutes (3 gal) to purge the system

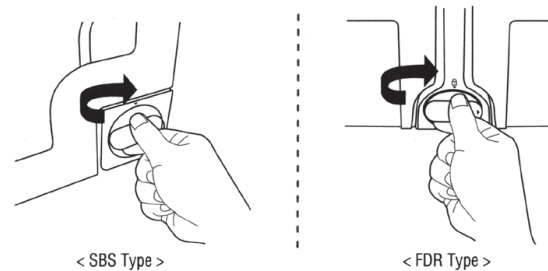

- 5** Open the refrigerator door and check the filter area for leaks.

