



OASIS INTERNATIONAL



## RADII™ MODULAR

### M8WR

#### Suggested Specification

Shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Model M8WR shall include a vandal resistant push button to activate the flow of water.

Fountain shall be designed to eliminate slashing and standing water. Bubbler shall have a flexible guard and operate between 20 and 120 psi. Chiller unit shall use R-134a refrigerant. Shall be listed by Underwriters' Laboratories to U.S. and Canadian Standards. Shall comply with ANSI A117.1 and ADA. Shall comply with the Safe Drinking Water Act and Lead Contamination Control Act. Shall comply with ANSI/NSF 61.

RADII™ Modular Water Cooler meets the needs of the physically disabled and the able-bodied

#### Model

**M8WR** A light press of the push button activates the water flow.

#### Standard Features

- > Built-in 100 micron strainer stops particles before they enter the waterway
- > Flexible bubbler guard
- > Waterways are Lead-Free in Materials & Construction
- > Brushed Stainless Steel Finish
- > Refrigerant R-134a
- > Heavy duty galvanized steel wall mounting frame
- > High efficiency cooling system
- > Limited 5-Year Warranty

#### Finishes

- > Standard Finish: Stainless Steel
- > Optional Finish (at additional cost): Regency Bronze

#### Installation

- > Prior to roughing-in, consult local, state and federal codes for proper mounting height.
- > Wall mounting frame is furnished for easy installation



#### Options (at additional cost)

- One Piece Tamperproof, Chrome Plated Brass Bubbler (036700-001)
- Vandal Resistant screw kit (036704-002)

**Limited 5-Year Warranty** (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

**Export Warranty:** One year on the sealed refrigeration system and most components parts. Detailed warranty certificate enclosed with each cooler; sample copy available upon request.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of <=0.25%) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953).

Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards and European Directives.

ADA Compliant when installed in an alcove or with right and left wing walls.

Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.




Oasis International Product  
Certified by NSF to  
NSF/ANSI Standard 61, G

Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model**	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
M8WR	8.0	8.0	No	No	1/4	4.8	550	No	Yes	99 Lbs.

\*Industry Standard Rating Condition 80°F inlet water temperature.

Specifications subject to change without notice

# OASIS® RADII™ BARRIER-FREE MODULAR WATER COOLER MODEL M8WR

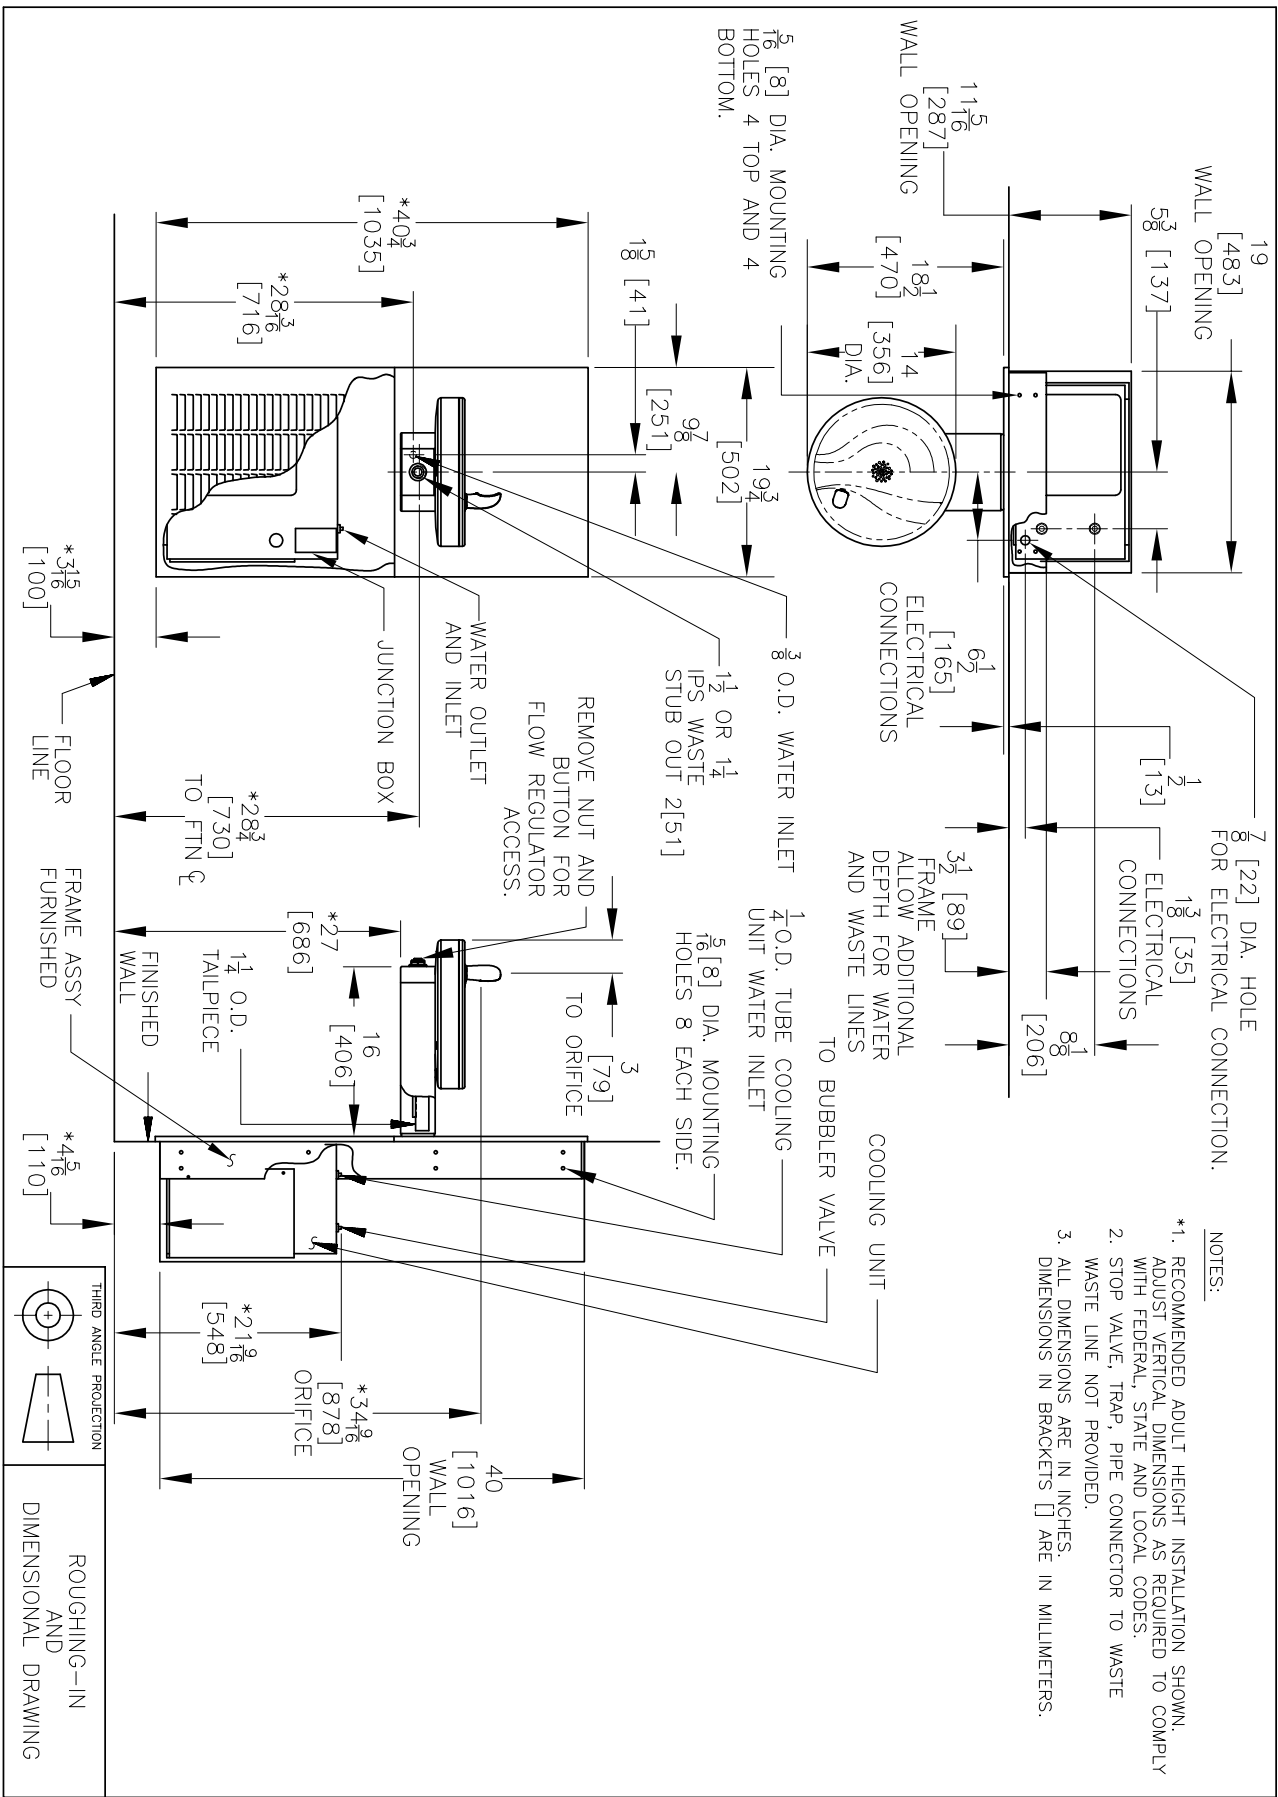

- NOTES:
- RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
  - STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE WASTE LINE NOT PROVIDED.
  - ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.

