

OptiPure

Snapshot

Premium quality water for office coffee service applications.

Cartridge Benefits

- WCS-10 and WCES-15 IAPMO certified to NSF/ANSI standards 42 & 53.
- WCTOI-8 IAPMO certified to NSF/ANSI standard 42
- Gradient-density depth filtration reduces dirt, rust and other debris as small as 1-micron to assure clean, clear water and protect solenoids, valves and other fittings against wear and plugging.
- Activated carbon filtration makes water taste great and protects equipment against corrosive chlorine.
- Scale inhibition reduces maintenance frequency and cost and extends equipment life.



Model: **WCTOI-8**
Part #: 300-05201

Model: **WCS-10**
Part #: 300-05110

Model: **WCPWS-10**
Part #: 300-05115

Model: **WCES-15**
Part #: 300-05211

ITEM #: _____ QTY: _____

JOB NAME/NUMBER: _____



Application

OFFICE WATER APPLICATIONS

- Coffee brewers, hot/cold bottleless water coolers and small ice machines.

Installation Tips


- Do not exceed cartridge specifications for temperature and pressure.
- Allow 3" clearance below system for filter housing removal and cartridge replacement.
- Feed-water connection to system should be COLD only.

► Specifications


Operating Pressure Range: 10 - 125 psi (0.7 - 8.6 bar)
 Inlet Water Temperature Range: 35° - 100°F (2° - 38°C)

Cartridge	Part No.	Systems Cartridge Used In	Dimensions (H x W, inches)	Capacity (Chlorine, Taste & Odor Reduction)	Service Flow Rate	Sediment Reduction (Nominal)	Shipping Weight
WCTOI-8	300-05201	H1-WCTOI-8, H3-WCTOI-8, H3T-WCTOI-8	7-5/8" x 3-7/8"	6,000 gals. (22,712 L)	0.75 gpm (2.85 lpm)	1 micron	2 lbs.
WCS-10	300-05110	H1-WCS-10, H3-WCS-10, H3T-WCS-10	11-1/4" x 3-1/8"	2,500 gals. (9,463 L)	0.50 gpm (1.90 lpm)	1 micron	3 lbs.
WCPWS-10	300-05115	H1-WCPWS-10, H3-WCPWS-10, H3T-WCPWS-10	11-1/4" x 3-1/8"	3,000 gals. (11,355 L)	0.50 gpm (1.90 lpm)	10 microns	3 lbs.
WCES-15	300-05211	H1-WCES-15, H3-WCES-15, H3T-WCES-15	12-3/4" x 3-7/8"	15,000 gals. (56,775 L)	1.67 gpm (6.32 lpm)	1 micron	5 lbs.


► WCTOI-8

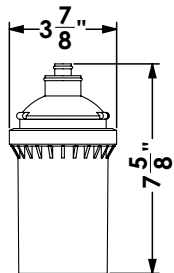

► WCS-10, WCPWS-10

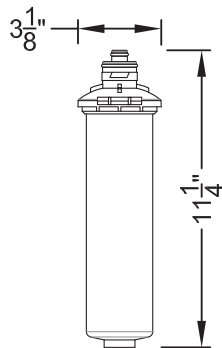

► WCES-15

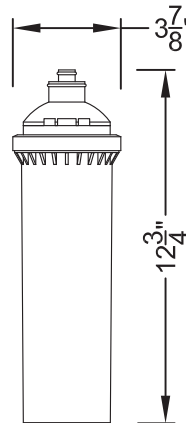

Cartridges WCS-10 and WCES-15 certified by IAPMO R&T to NSF/ANSI Standards 42 and 53 for the reduction of cysts, chlorine, taste and odor when used in the systems specified above.

Cartridge WCTOI-8 certified by IAPMO R&T to NSF/ANSI Standard 42 for the reduction of chlorine, taste and odor, when used in the systems specified above.



WARNING:
 Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

► Warranty

Replacement filter cartridges are warranted for defects in material and workmanship only. Service life of replacement filter cartridges varies significantly with local water conditions and volume and thus cannot be warranted. Furthermore, separation membranes are equally susceptible to feed water conditions (e.g. presence of iron, alum and silica) and shall be warranted only for defects in construction. Membrane failure due to fouling, hydrolysis, oxidation or other damage caused by the local water conditions is not covered under warranty. For complete warranty information, contact OptiPure customer service or go to www.optipurewater.com.

It is recommended that pre/post-filters and mineral addition cartridges are changed every 6 months, when capacity is reached or when feedwater pressure or flow becomes inadequate.

Membrane life varies depending on feedwater conditions and pre-filter maintenance. It is 12-18 months under typical conditions, but it can be as long as 3-5 years.

This product is for commercial use only and must be installed and maintained according to manufacturer's guidelines.

Do not use on water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

OptiPure, A Division of Aquion, Inc.

101 S. Gary Ave., Suite A
 Roselle, IL 60172

p: 972.881.9797 e: info@optipure.net
www.optipurewater.com

Dealer/Distributor Info: