


# CTOX Series

## Lead Plus Carbon

### Block Filter Cartridges

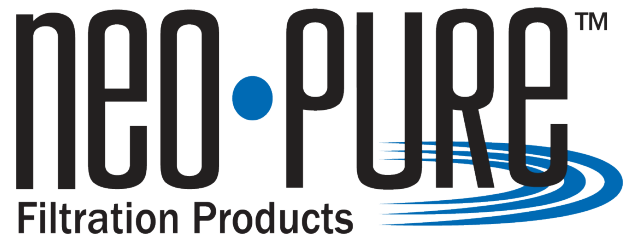

## Residential / Commercial Filtration Applications

### STANDARD FEATURES

- Manufactured in the USA
- Eco-friendly activated coconut shell carbon filter media to provide exceptional filtration and a high level of CTO, Lead, Chloramine, MTBE, VOC, and Cyst reduction
- Economical and competitive price while providing exceptional performance and high adsorptive capacity
- All materials and components are FDA compliant. Ideal for drinking water applications in residential, food service and commercial settings
- Filters available in standard 2-1/2" and 4-1/2" (BB-style) cartridge diameters
- Polypropylene outer netting and layers provide superior sediment and particulate reduction
- NSF/ANSI standard 42 certified for material requirements only
- Performance claims tested and verified by independent third party laboratory
- California Prop 65 Compliant

### CONTAMINANTS REDUCED

- Asbestos reduction\*
- Atrazine reduction\*
- Chlorine Taste and Odor\*
- Cyst reduction\*
- Lead reduction\*
- Lindane reduction\*
- Mercury reduction\*
- MTBE reduction\*
- Particulate I reduction\*
- VOC reduction\*



Tested and certified by NSF International against NSF/ANSI Standard 42 for materials requirements only.

### PRODUCT SPECIFICATIONS

#### Filter Media

Lead Scavenger Infused Catalytic Activated Coconut Shell Carbon

Micron Rating (Nominal)

0.5 micron

Cartridge Length

10" and 20"

Outside Diameters

2-1/2" and 4-1/2" OD

Operating Temperature

40°F – 125°F

Operating Pressure

20 psig - 125 psig

#### WARNING:


Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

\*Based on Manufacturer's testing

# Ordering Guide (Example: CTOX-4510)

PART NUMBER	NOMINAL DIMENSIONS	CHLORAMINE, LEAD & MERCURY, VOC & MTBE	MAXIMUM FLOW	NOMINAL MICRON RATING	INITIAL PRESSURE DROP (PSI)
CTOX-2510	2-1/2" X 10"	2,500	1 GPM (3.785 LPM)	0.5	< 10 PSI @ 0.75 GPM
CTOX-2520	2-1/2" X 20"	5,000	2 GPM (7.57 LPM)	0.5	< 10 PSI @ 1.5 GPM
CTOX-4510	4-1/2" X 10"	8,000	3 GPM (11.35 LPM)	0.5	< 7 PSI @ 2.5 GPM
CTOX-4520	4-1/2" X 20"	17,000	6 GPM (22.71 LPM)	0.5	< 6.5 PSI @ 5 GPM

## Dimensions

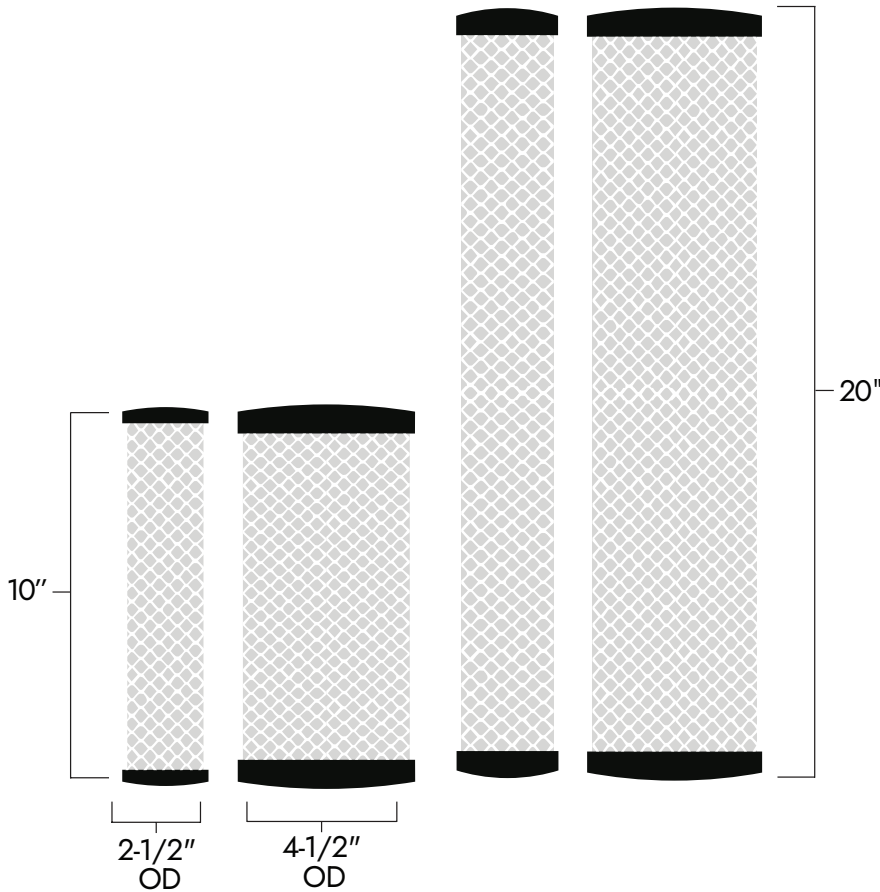

## Case Packs

DIMENSIONS	QUANTITY
2-1/2" x 10"	20
2-1/2" x 20"	20
4-1/2" x 10"	12
4-1/2" x 20"	6

Distributed By:



2299 Ridge Rd., Greenville, SC  
 P: 888.859.1188 • F: 864.284.1819  
 neologicsolutions.com | sales@neologicsolutions.com

## Questions?

Ask our Service Representatives at:  
 888.859.1188 Mon.-Fri. 8a-8p,  
 Sat 8:30a-4:30p EST.