
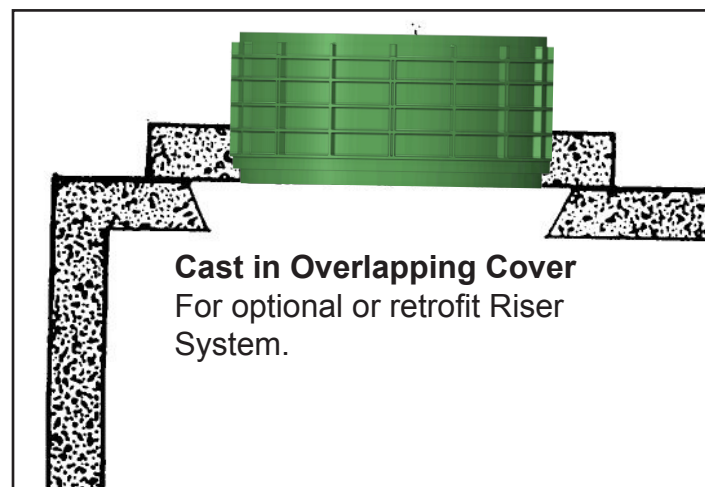
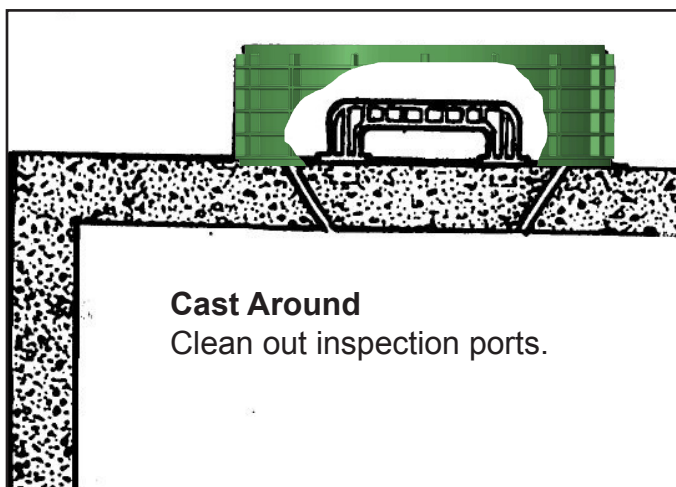
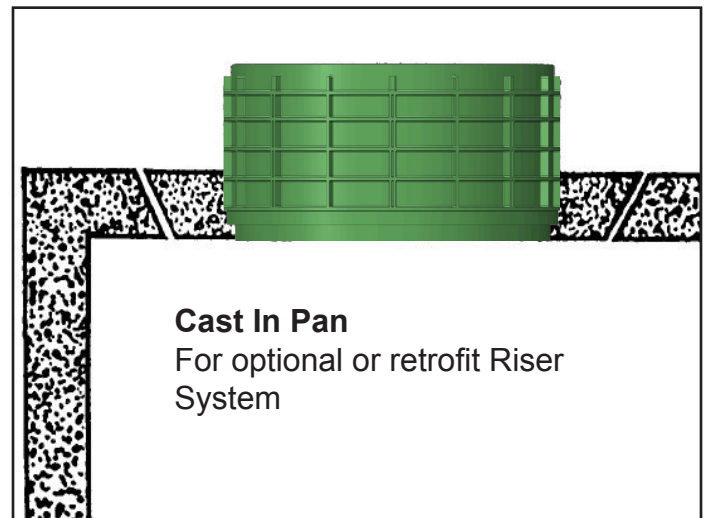



### Casting Variations.

**IMPORTANT!**

Lid should be in place when casting riser.

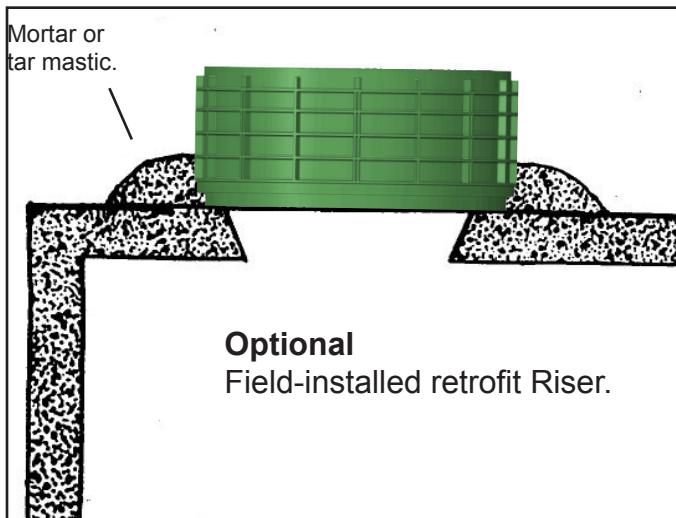

20" Round Riser  
cast in concrete.

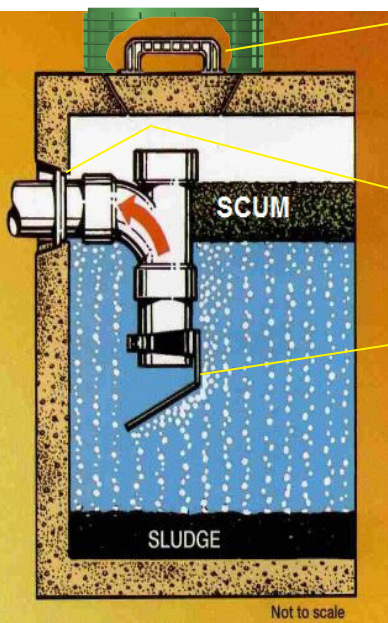

Concrete Lid Handle  
HDPE handle for precast  
concrete septic tank lid.  
Rated 500 lbs. Hand-lift  
only.

Tank Seals  
Cast-in-place plastic  
Tank Seals.

Gas Baffle GB1  
Stops gas bubbles from car-  
rying solids into septic field.  
Non-corrosive polypropylene.  
Installs easily on sanitary tee.

### 12", 16", 20" & 24" Risers Stackable. Watertight. Gastight.

Extend septic tanks to grade faster  
and easier than ever. Tuf-Tite Round  
Risers provide a 6" or 12" rise. Simply  
stack as many as needed to reach  
your desired level. They interlock firm-  
ly for quick, accurate stacking.

Choose 12", 16", 20" or 24" models. All  
are molded of rugged, non-corrosive  
high-density polyethylene, with ribbed  
construction for exceptional strength.  
Heavy-duty HDPE lid interlocks on the  
top riser.


### 12", 16", 20" and 24" diameters

All Round Risers are either 6" or 12" in  
height (installed).



Interlocking Domed and  
Flat Lids, with molded-in  
gaskets, are available for  
all sizes.

Patent Numbers:  
5,617,679 & 5,852,901;  
others pending.

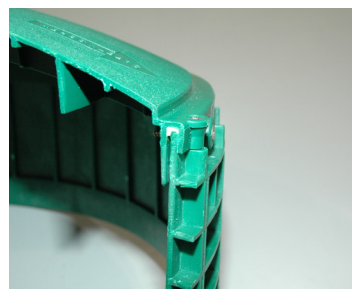

Interlocking design  
Sidewalls interlock easily for accurate  
stacking. No special connectors needed.  
Interlocking risers may be made watertight  
and gas-tight with field installed sealant.



Screw-on gasketed lid.  
A heavy duty HDPE Domed Lid interlocks  
on the top riser. It can be screwed down  
with stainless steel screws (provided).  
Simply line up the screw holes on the lid  
with the special screw channels on the  
riser sidewall.