

EFC12 SERIES CONNECTOR



Specifications ● ● ●

PRESSURE:

Vacuum to 105 psi, 7.2 bar

TEMPERATURE:

32°F to 160°F (0°C to 71°C)

MATERIALS:

Main components and valves: Polypropylene

Thumb latch: Polypropylene

Valve spring: 316 stainless steel

Panel mount gasket: EPDM

External springs: 302 stainless steel

O-rings: EPDM

COLOR:

Gray with dark gray latch

TUBING SIZES:

1/4" and 3/8" ID, 6.4mm and 9.5mm ID

WARNING: Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of CPC's products in their own application conditions.

The **9/32" flow EFC12 Series couplings** feature a high efficiency valve design that provides a greater flow capability than any other coupling its size. Chemically resistant polypropylene material makes it ideal for harsh environments. The EFC12 Series adds a bulkhead panel mount option for tight seals against tank walls and drums.

FEATURES

High efficiency valve

Plastic thumb latch

Polypropylene material

Compatible

BENEFITS

More flow than PLC Series in a compact size


Fewer moving parts

Chemically resistant and gamma sterilizable


Mates with most APC couplings

These graphs are intended to give you a general idea of the performance capabilities of each product line. The shaded area of each graph represents the operating range of the product family, i.e., upper and lower values are shown. Therefore, depending on the exact coupling configurations selected, you can reasonably expect values to fall within the shaded area.


EFC12 Air Flow, 100 psig Inlet Pressure

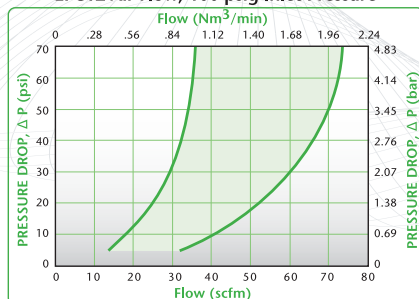

EFC12 Water Flow

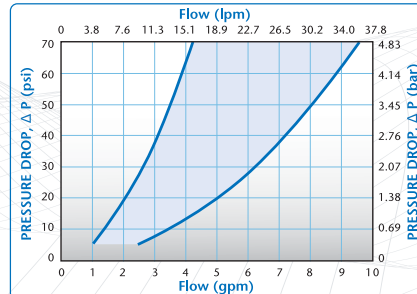

EFC12 Pressure Range

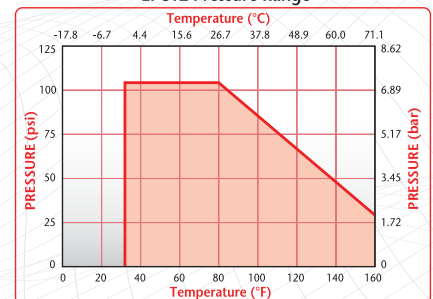

Liquid Flow Rate Information for Couplings

The chart below shows the flow rate for CPC couplings. Each coupling was tested with water at 70°F (21°C). To determine flow rates for specific coupling configurations use the formula at the right.

$$Q = C_v \sqrt{\frac{\Delta P}{S}}$$

Q = Flow rate in gallons per minute

C_v = Average coefficient across various flow rates (see chart)

ΔP = Pressure drop across coupling (psi)

S = Specific gravity of liquid

C_v VALUES FOR EFC12 COUPLINGS

	INSERTS	EFC	EFC	EFC	EFC	EFC	EFC	EFC	EFC	EFC
BODIES		2000412	2000412	2000612	2000612	2200412	2200412	2200612	2200612	2400412
EFC	D10412	0.51	0.51	0.51	0.51	0.50	0.45	0.50	0.50	0.51
EFC	D10612	0.61	0.51	1.13	0.72	0.50	0.45	0.81	0.69	0.51
EFC	D16412	0.51	0.51	0.51	0.51	0.50	0.45	0.50	0.50	0.51
EFC	D16612	0.61	0.51	1.13	0.72	0.50	0.45	0.81	0.69	0.51
EFC	D17412	0.51	0.51	0.51	0.51	0.50	0.45	0.50	0.50	0.51
EFC	D17612	0.61	0.51	1.13	0.72	0.50	0.45	0.81	0.69	0.51