


Stem Adapter (NPTF)

Pressure Ratings			
	< 5/16"	3/8"	1/2"
33 °F	290 psi	232 psi	203 psi
68 °F	290 psi	232 psi	203 psi
150 °F	232 psi	203 psi	116 psi

Torque Allowance					
Thread Size	1/8"	1/4"	3/8"	1/2"	3/4"
Max Torque	1.1 ft lbs	1.1 ft lbs	2.2 ft lbs	2.2 ft lbs	2.9 ft lbs

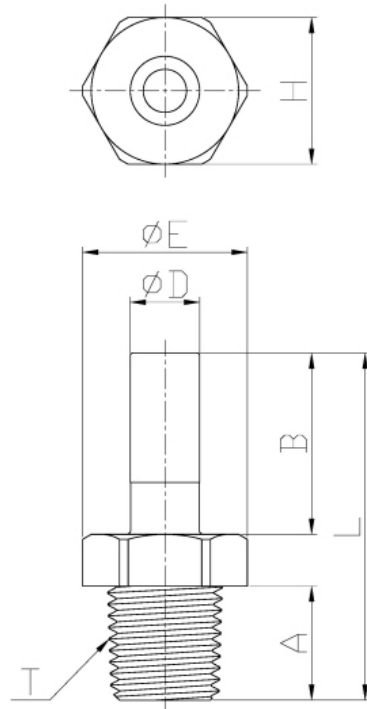

Model	D	T (NPTF)	A	B	E	H	L	Weight (g)
ASAZ5-N1	5/32	1/8	0.358	0.709	0.555	1/2	1.303	1.9
ASAZ5-N2	5/32	1/4	0.520	0.709	0.701	5/8	1.465	3.6
ASA3-N1	3/16	1/8	0.358	0.709	0.555	1/2	1.303	2
ASA4-N1	1/4	1/8	0.358	0.748	0.555	1/2	1.343	2.1
ASA4-N2	1/4	1/4	0.520	0.748	0.701	5/8	1.504	3.8
ASA5-N1	5/16	1/8	0.358	0.787	0.555	1/2	1.382	2.8
ASA5-N2	5/16	1/4	0.520	0.787	0.701	5/8	1.543	3.9
ASA5-N3	5/16	3/8	0.543	0.787	0.846	3/4	1.587	5.9
ASA6-N2	3/8	1/4	0.520	0.906	0.701	5/8	1.661	4.5
ASA6-N3	3/8	3/8	0.543	0.906	0.846	3/4	1.705	6.5
ASA8-N3	1/2	3/8	0.543	1.063	0.846	3/4	1.862	6.9
ASA8-N4	1/2	1/2	0.701	1.063	1.055	15/16	2.020	11.4