


Female Connector (NPTF)

Pressure Ratings			
	< 5/16"	3/8"	1/2"
33 °F	290 psi	232 psi	203 psi
68 °F	290 psi	232 psi	203 psi
150 °F	232 psi	203 psi	116 psi

Torque Allowance					
Thread Size	1/8"	1/4"	3/8"	1/2"	3/4"
Max Torque	1.1 ft lbs	1.1 ft lbs	2.2 ft lbs	2.2 ft lbs	2.9 ft lbs

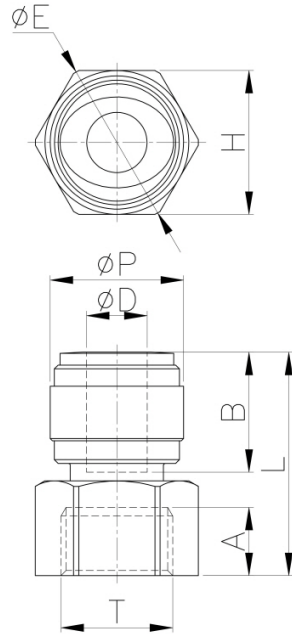

Model	D	P	T (NPTF)	L	A	B	H	E	Weight (g)
AFA4-N1	1/4	0.610	1/8	1.217	0.453	0.665	0.669	0.748	6.1
AFA4-N2	1/4	0.610	1/4	1.217	0.453	0.665	0.748	0.846	6.5
AFA5-N2	5/16	0.693	1/4	1.240	0.453	0.539	0.748	0.846	7.3
AFA6-N2	3/8	0.787	1/4	1.346	0.453	0.795	0.748	0.846	8.5