



- Kills water hammer
- Limits water pressure
- Available in 40, 60, 70 and 125 PSI limits

### **SHOK BLOK™ FILTER PROTECTION VALVES**

Are you best choice for limiting water pressure to your water filtration device. **SHOK BLOK™** Filter Protection Valves are designed for high pressure installations to protect reverse osmosis systems, water filters, ice makers, coffee machines, chillers, hot tanks and water coolers.

### **SHOK BLOK™ FILTER PROTECTION VALVES**

Protect water filtration devices by limiting water pressure and reducing water hammer. Four models to choose from to best suit your applications.



# SHOK BLOK™ Filter Protection Valve

## Product Specifications

Flow: 4 Gal/min (15L/min) at 100 PSI  
 Max. Pressure: 300 PSI  
 Max. Temperature: 104°F (40°C)


### ASV SERIES SPECIFICATIONS

| Part Number | Description                                    |
|-------------|--|
| SB-FPV-40   | Limiting Valve 40 PSI, 1/4" Tube Inlet/Outlet  |
| SB-FPV-60   | Limiting Valve 60 PSI, 1/4" Tube Inlet/Outlet  |
| SB-FPV-70   | Limiting Valve 70 PSI, 1/4" Tube Inlet/Outlet  |
| SB-FPV-125  | Limiting Valve 125 PSI, 1/4" Tube Inlet/Outlet |


### ASV SERIES SPECIFICATIONS

| Model      | PSI Specification | Inlet Pressure (PSI) | Outlet Pressure (PSI) |
|------------|-------------------|----------------------|-----------------------|
| SB-FPV-40  | 40                | 100                  | 40                    |
|            | 40                | 150                  | 44                    |
|            | 40                | 200                  | 50                    |
| SB-FPV-60  | 60                | 100                  | 60                    |
|            | 60                | 150                  | 64                    |
|            | 60                | 200                  | 70                    |
| SB-FPV-70  | 70                | 100                  | 68                    |
|            | 70                | 150                  | 72                    |
|            | 70                | 200                  | 74                    |
| SB-FPV-125 | 125               | 150                  | 130                   |
|            | 125               | 250                  | 135                   |
|            | 125               | 300                  | 140                   |

For SB-FPV-40, 60, and 70: Testing Standard Pressure = 100 PSI (Tolerance ± 0.05)  
 For SB-FPV-125: Testing Standard Pressure = 150 PSI (Tolerance ± 0.05)

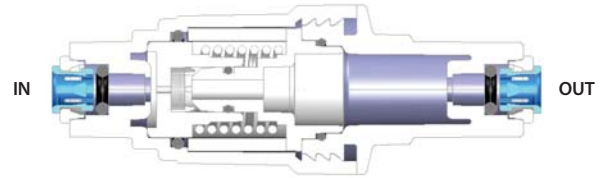

Filter Protection Valves 1/4" Tube Inlet/Outlet

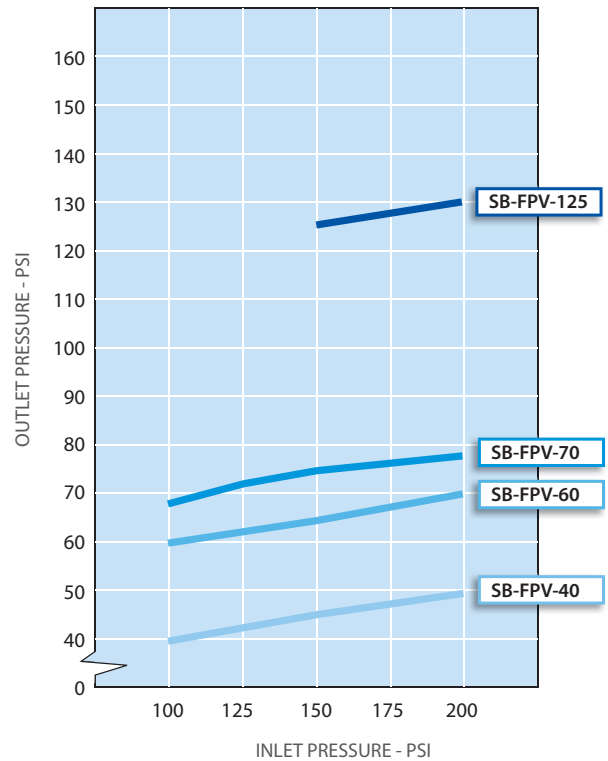

Distributed by:

## HYDRONIX WATER TECHNOLOGY

P.O. Box 927, Chino Hills, CA 91709 USA  
 sales@hydronixwater.com • www.HydronixWater.com