



Parallel 202 Pre-Filter Kit with Extra Capacity Surge Tank 9336-52

Provides quality water to high volume fountain dispensers, coffee makers and ice machines where extreme water conditions demand larger capacity filters.

BENEFITS

- Ideal for water supplies with excessive dirt loads.
- Special dual gradient prefilter reduces dirt and other particulate matter at 10 microns (nominal) in size.
- Parallel 4"x20" sumps hold high efficiency cartridges.
- Model 202 prefilter extends the life of the system cartridges.
- Built-in water meter determines water demand and usage for all beverage-using equipment.
- Additional draw down capacity for high volume and peak demand locations.
- Allows for 12-gallon reserve of filtered water.
- Includes fittings for connections to existing Everpure System.



APPLICATION/SIZING

High-volume combination installations.

Model 9336-52 Kit Components:

Parallel 202 Pre-Filter: 9100-24

EC-204 Cartridges: 9108-40


Extra Capacity Surge Tank: 9336-51

INSTALLATION TIPS

- Use a minimum 3/4" water line
- Never use a saddle valve for connection
- Fountain equipment connections are made to the outlet part of system before the IMF feeder
- Coffee brewer and ice maker connections are made after the IMF feeder; a tee is required
- **Flush filter cartridges by running water to drain at full flow through the flushing valve for 5 minutes.**

OPERATION TIPS

- Change precoat filter cartridges
 - on a regular 6 month preventative maintenance basis
 - when the pressure gauge indicates a pressure less than 10 psi when the system is operating.
 - or at least annually
 - Change the IMF cartridge when the level of white inhibitor material drops below the cartridge label.
 - Change the prefilter cartridges when excessively dirty.
- Always flush the filter cartridges when changing.**

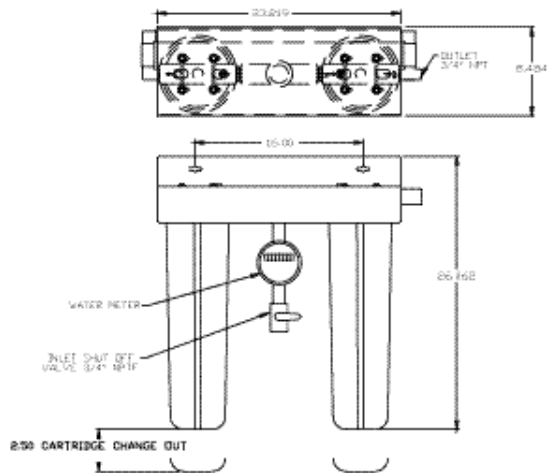

SPECIFICATIONS

Dimensions: 26-1/8" x 23-1/4" W x 8.5"D; a clearance of 2-1/2" underneath system is required for cartridge exchange.

Inlet connection: 3/4" internal pipe thread (FPT)

Service flow rate: Maximum 10 gpm


Pressure: Minimum 5 psi
Maximum 90 psi (non-shock)

Maximum temperature: 100°F (38°C) **cold water use only**

No electrical connection required

Shipping weight: 32.5 lbs.

Operating weight: 41.5 lbs.

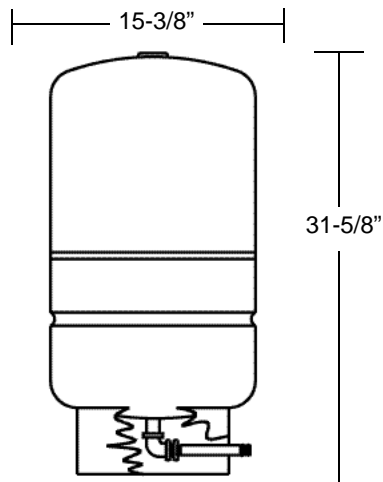

SPECIFICATIONS

Dimensions: 31-5/8"H x 15-3/8"D

Inlet connection: 3/4" NPT

Service flow rate: Maximum 10 gpm

Working pressure: 100 psi, non-shock

Maximum temperature: 100°F (38°C)

No electrical connection required


Shipping weight: 35 lbs.

Operating weight: 133 lbs.

LIMITED WARRANTY OF PHYSICAL QUALITY

If, within eighteen months after manufacture or twelve months after purchase (whichever occurs first), any part of Everpure, Inc. manufacture which is returned to its factory, shipping charges prepaid, is found to be defective in material or workmanship in the judgement of Everpure's engineers, Everpure, Inc. will repair or replace such part at no charge, f.o.b., Westmont factory. Everpure, Inc. however, shall not be liable for damages or delays caused by any defective material or workmanship, or by failure of any parts due to normal wear and tear. Everpure, Inc. will not be responsible for products which malfunction due to user neglect or unauthorized modification.

NOTE: Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Similarly, some states do not allow the exclusion or limitation of consequential or incidental damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which may vary from state to state.



EVERPURE, INC.
660 Blackhawk Drive
Westmont, IL 60559-9005
Tel (630) 654-4000
FAX (630) 654-1115
Technical Service
(800) 942-1153
<http://www.everpure.com>

In Europe:
N.V. EVERPURE (EUROPE)
S.A.
Research Park, Haasrode
B-3001 Heverlee
Belgium
Tel 32-16-401191
FAX 32-16-402691

In Japan:
EVERPURE JAPAN, INC.
1-8-19, Tsumada Kita,
Atsugi-Shi
Kanagawa 243
Japan
Tel 81-462 (23) 6563
FAX 81-462 (21) 6775