

# Aqua-Pure®

## Models:

**AP110 Series / AP124 Series**

**Whole House Water Filters**

Spec # \_\_\_\_\_

Quantity \_\_\_\_\_

### Applications:

- Pre-Filtration
- Particulate/Rust

### At a Glance:

- Up to 30% Longer Lasting\*
- 47% More Surface Area\*
- 50% More Efficient\*



AP110 / AP124

AP110-2

### Product Benefits:

- Patent pending technology provides fine sediment filtration down to 5 micron\*\*
- Grooved cartridge increases surface area for longer cartridge life, by 132% over non-grooved and 47% over the previous design
- Rigid construction helps to eliminate sediment “unloading” due to variances in water pressure


\* as compared to original AP110 design

\*\* depends on model selected

### Product Specifications:

Model No. (Part No.)	Dimensions		Flow Rate	Max. Water Temp.	Degree of Filtration
	Height	Diameter			
AP110 (56204-04) (56204-06)	9-3/4" (24.8 cm)	2-1/2" (6.4 cm)	8 gpm (30.3 lpm)	170°F (76.7°C)	5 micron nominal
AP110-2 (56204-05)	19-1/2" (49.5 cm)	2-1/2" (6.4 cm)	16 gpm (60.6 lpm)	170°F (76.7°C)	5 micron nominal
AP124 (56206-01) (56206-05)	9-3/4" (24.8 cm)	2-1/2" (6.4 cm)	8 gpm (30.3 lpm)	170°F (76.7°C)	50 micron nominal

# Aqua-Pure®

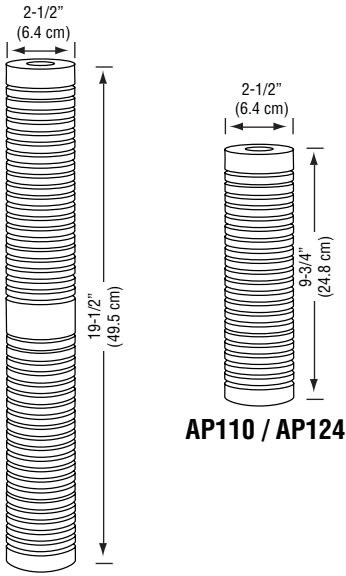


AP110-2

AP110 / AP124

## Easy Installation:

**CAUTION:** Diagram shown is for reference purposes only. Read installation and operation manual prior to installing the unit.

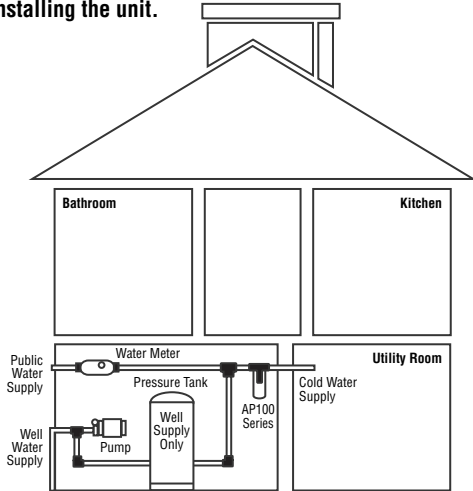

Spec # \_\_\_\_\_

Quantity \_\_\_\_\_

Model Number \_\_\_\_\_

Part Number \_\_\_\_\_

## Physical Specifications:

- Cartridge is manufactured from FDA CFR-21 compliant materials
- Cartridge has a maximum operating temperature of 170°F (76.7°C)
- Cartridge to be installed at point of entry

Fits all 3M Purification Inc. and most competitive filter housings		
AP110	AP110-2	AP124
AP11T	AP12T	AP11T
AP101T	AP102T	AP101T
AP1610SS	AP2610SS	AP1610SS
SST1HA	SST2HB	SST1HA
SS4 EPE-316L (4 carts)		SS4 EPE-316L (4 carts)
SS8 EPE-316L (8 carts - 2 high)		SS8 EPE-316L (8 carts - 2 high)
SS12 EPE-316L (12 carts - 3 high)		SS12 EPE-316L (12 carts - 3 high)
SS20 EPE-316L (20 carts - 4 high)		SS20 EPE-316L (20 carts - 4 high)
SS24 EPE-316L (24 carts - 2 high)		SS24 EPE-316L (24 carts - 2 high)
SS36 EPE-316L (36 carts - 3 high)		SS36 EPE-316L (36 carts - 3 high)

**⚠ WARNING:** To reduce the risk associated with the ingestion of contaminants:

- Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

3M Purification Inc. recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold. 3M Purification Inc. shall not be liable for system failures due to improper maintenance.

**CAUTION:** To reduce the risk associated with property damage due to water leakage:

- The disposable filter cartridge **MUST** be replaced every six (6) months, at the rated capacity or sooner if a noticeable reduction in flow rate occurs.

## Limited Warranty:

**Limited Warranty:** 3M Purification Inc. warrants this Product will be free from defects in material and manufacture for five (5) years from the date of purchase. The filter cartridge or filter membrane is warranted to be free from defects in material and manufacture for one (1) year. This warranty does not cover failures resulting from abuse, misuse, alteration or damage not caused by 3M Purification Inc. or failure to follow installation and use instructions. No warranty is given as to the service life of any filter cartridge or membrane as it will vary with local water conditions and water consumption. **3M PURIFICATION INC. MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOMER OR USAGE OF TRADE.** If the Product fails to satisfy this Limited Warranty during the warranty period, 3M Purification Inc. at its option will replace the Product or refund your Product purchase price. This warranty does not cover labor. **The remedy stated in this paragraph is Customer's sole remedy and 3M Purification Inc.'s exclusive obligation.** For additional information, see the entire Limited Warranty located in the product Installation and Operating Instruction Manual.

**Limitation of Liability.** 3M Purification Inc. will not be liable for any loss or damage arising from this 3M Purification Inc. product, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability. Some states and countries do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Distributed by:



3M Purification Inc.  
400 Research Parkway  
Meriden, CT 06450 U.S.A.  
Toll Free: 1.800.222.7880  
Worldwide: 203.237.5541  
Fax: 203.238.8701  
www.aquapure.com • www.3mpurification.com



Visit [www.nsf.org](http://www.nsf.org) for the claims associated with products that are NSF listed.

Aqua-Pure is a trademark of 3M Company used under license  
3M is a trademark of 3M Company  
NSF is a trademark of NSF International.  
© 2011 3M Company. All rights reserved.  
70-0202-2006-0 REV 1211