



VANDAL RESISTANT UNIVERSAL BARRIER-FREE VERSACOOLER® II

PV8ACSL, PVACSL

Suggested Specification

Model PV8ACSL shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Model PVACSL is non-refrigerated and delivers ambient water. Shall include a single vandal resistant push button to activate the flow of water. Basin shall be designed to eliminate splashing and standing water. Bubbler shall have flexible guard, vandal resistant, and operate between 20 and 120 PSI. Cabinet finish shall be brushed stainless steel. Cabinet shall have perforated galvanized steel screens to prevent objects from being inserted into the cooler. Cooling system shall use R-134a refrigerant. Shall comply with ANSI A117.1 and ADA. Shall be listed by Underwriters' Laboratories to U.S. and Canadian standards. Shall comply with ANSI/NSF 61.

Model

PV8ACSL Delivers 8.0 gallons of chilled drinking water an hour
PVACSL is a non-refrigerated fountain

Standard Features

- > Built-in 100 micron strainer stops particles before they enter the waterway
- > Waterways Are Lead-Free In Materials & Construction
- > Brushed Stainless Steel Finish
- > Stainless Steel Top
- > Vandal Resistant Bubbler With Flexible Guard
- > Heavy Duty Galvanized Steel Frame
- > Galvanized Steel Louver and Bottom Screen
- > High Efficiency Cooling Tank and Coil
- > Refrigerant R-134a
- > Vandal Resistant Front Push Button
- > Vandal Resistant Fasteners

Finishes

- > Standard Cabinet Finish: Brushed Stainless Steel

Installation

- > Prior to roughing consult with local, state, and federal codes for proper mounting height.
- > Shipped with complete instructions and wall mounting bracket.
- > Removable side and front panels provide easy access for installation.



Options (at additional cost)

- One piece Chrome Plated Brass Bubbler (036700-001)

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty: One year on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

ADA Compliant when installed in alcove or with right wing wall, or with accessory apron.

Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of <=0.25%) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953).

Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards.

This unit is rated for outdoor use when properly installed.

This unit complies with A.R.I Standard 1010




Oasis International Product
Certified by NSF to
NSF/ANSI Standard 61, G

Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot 'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PV8ACSL	8.0	8.0	NO	No	1/4	4.6	460	No	No	84 Lbs.
PVACSL	NO	NO	50 Lbs.


*Industry Standard Rating Condition 80° F inlet water temperature.

Specifications subject to change without notice


OASIS™ BARRIER-FREE SPLIT-LEVEL Versacooler® II MODELS
P8ACSL, P8ACSLEE, PF8ACSLEE, PF8ACSL, PV8ACSL, PVF8ACSL
SUNROCK MODELS ADA8ACB, ADA8ACBHF, ADAF8ACB, ADAF8ACBHF

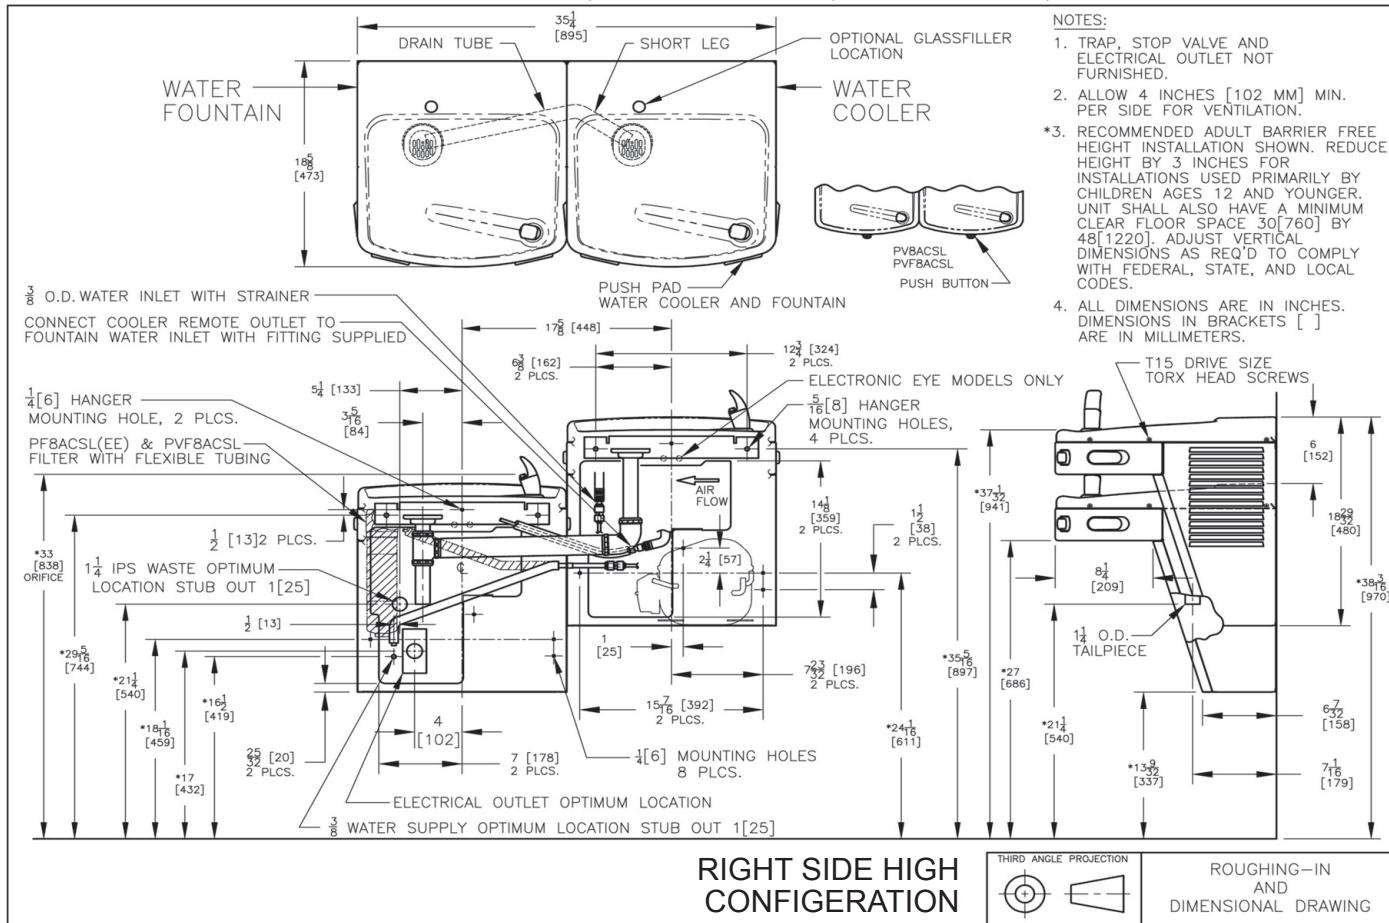


RIGHT SIDE HIGH
CONFIGURATION



ROUGHING-IN
AND
DIMENSIONAL DRAWING

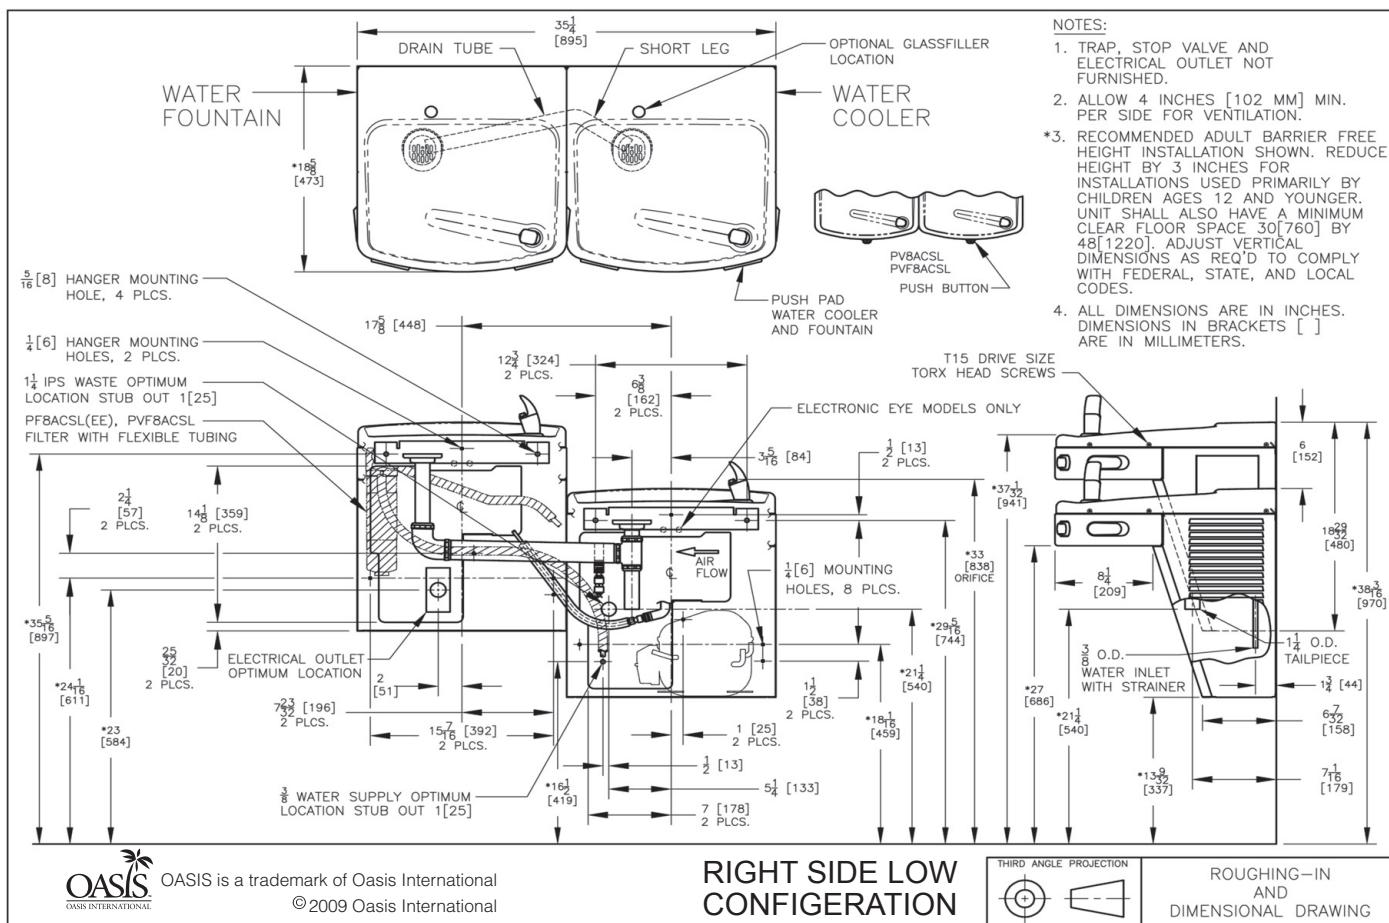

RIGHT SIDE LOW
CONFIGURATION



ROUGHING-IN
AND
DIMENSIONAL DRAWING