BB 150 Series

Big Bubba®Replacement Cartridges Pleated • Melt-Blown • Carbon



Residential / Commercial / Industrial Filtration Applications

Standard Features

- The center tube, end cap and filter media is made of 100% polypropyene, no cellulose (paper) which is subject to bacterial growth
- Pleated polypropylenematerial provides lower initial pressure drop which provides higher flow rates and longer filter run
- The center tube, end cap and polypropylene filter media are thermally bonded as one unit, which provides additional strength and a positive seal
- Pleated cartridges are cleanable and reusable in most micron ratings and filtration applications
- Melt-Blown cartridges are graded density pore structure providing true depth-style filtration for high dirt-holding capacity
- Carbon cartridges are manufactured with eco-friendly activated coconut shell carbon filter media to provide exceptional filtration and a high level of chlorine taste and odor reduction
- NSF Stan dard 61 Approved Material

Product Specifications

Micron Sizes

Pleated: Nominal - 1, 5, 20, 50, 150, Absolute - 1A Melt-Blown: Nominal - 1, 5, 20, 50 Carbon: Nominal - 5

Cartridge Lengths 25-1/2 "

Outside Diameters 6-1/4" OD

Operating Temperature 160°F (71.1°C) temperature limit*

Materials of Construction

Filter Media: Pl eated polypropylene melt-blown Core: Polypropylene End Caps: Polypropylere O-Ring: Buna N or EDPM

1 Cooling Tower Filtration

Applications


- 2 Desalination Prefiltration
- 3 Food and Beverage
- 4 Industrial Wastewater Treatment
- 5 Oil and Gas
- 6 Paints, Inks and Coatings
- 7 Paper and Pulp
- 8 Potable Drinking Water
- 9 Process Water
- 10 Sea Water
- 11 Reverse Osmosis Pre-filtration
- 12 Wholehouse Filtration

* Temperature limits vary and depend on pressure and time under load.


Cartridge Selection and Sizing Guide

Cartridge Type	Product Code	Micron Rating	Recommended Flow Rate*	Maximum Flow Rate* (GPM)	No. Per Carton	Carton Size
	Neo-Pure [®] Big Bubba [®] Replacement Filter Cartridges					
Pleated	BB150-PH01A	1 (Absolute)	80	150	1	7 x7 x31
	BB150-PH01	1	80	150	1	7 x 7 x 31
	BB150-PH20	20	80	150	1	7 x 7 x 31
	BB150-PH05	5	80	150	1	7 x 7 x 31
	BB150-PH50	50	80	150	1	7 x 7 x 31
	BB150-PM150	150	80	150	1	7 x 7 x 31
Melt-Blown	BB150-HMB01	1	50	75	1	7 x 7 x 31
	BB150-HMB05	5	50	75	1	7 x 7 x 31
	BB150-HMB20	20	50	75	1	7 x 7 x 31
	BB150-HMB50	50	50	75	1	7 x 7 x 31
Carbon	BB150-CTO	150	10 - 12	20	1	7 x 7 x 31
Swimming Pools	BB150-PS	20	80	150	1	7 x 7 x 31

Pressure Drop

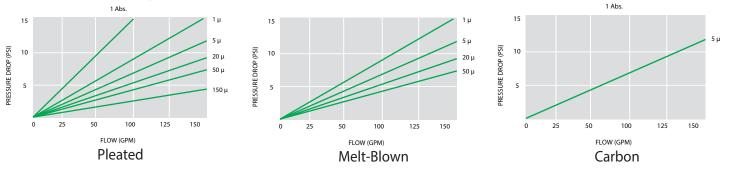

Dimensions

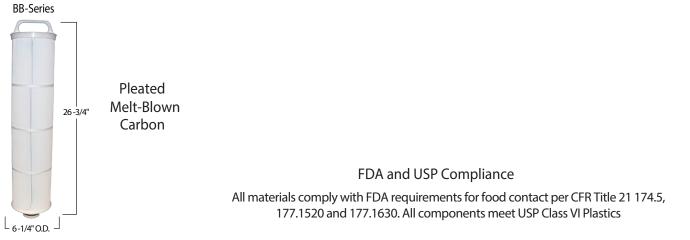

Distributed By:



2299 Ridge Rd., Greenville, SC P:888.859.1188 • F:864.284.1819 NeoLogicSolutions.com • Info@NeoLogicSolutions.com Questions?

Ask our Service Representatives at: 888.859.1188 Mon.-Fri. 8:30a-7p, Sat 8:30a-4:30p EST.

All rights and illustrations reserved. Manufacturer reserves the right to make changes without notice. ©2017 NeoLogic Solutions.