

# CHLM Series Chloramine Carbon Block Filter Cartridges



## Residential/Commercial Filtration Applications

### Standard Features

- Manufactured in the USA
- Eco-friendly activated coconut shell carbon filter media to provide exceptional filtration and a higher level of chloramine and chlorine taste and odor reduction
- Economical and competitive price while providing exceptional performance and high adsorptive capacity
- All materials and components are FDA compliant. Ideal for drinking water applications in residential, food service and commercial settings
- Filters available in standard 2-1/2" and 4-1/2" (BB-style) cartridge diameters
- Polypropylene outer netting and layers provide superior sediment and particulate reduction
- NSF/ANSI standard 42 certified for material requirements only
- Performance claims tested and verified by independent third party laboratory
- California Prop 65 Compliant

### Product Specifications

#### Filter Media

Coconut shell carbon block

#### Micron Rating (Nominal)

1 micron

#### Cartridge Length

10" and 20"

#### Outside Diameters

2-1/2" and 4-1/2" OD

#### Operating Temperature

40° F - 125° F

#### Operating Pressure

20 psig - 125 psig

#### FDA and USP Compliance

FDA polypropylene filters are manufactured with materials that comply with FDA requirements for food contact

#### WARNING:

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

### Contaminants Reduced:

- Chloramine
- Chlorine Taste and Odor




Tested and certified by NSF International against NSF/ANSI Standard 42 for materials requirements only.

# Ordering Guide (Example: CHLM-4510)

	PART NUMBER	NOMINAL DIMENSIONS	CAPACITY (GALLONS)	MAXIMUM FLOW	NOMINAL MICRON RATING	INITIAL PRESSURE DROP (PSI)
<b>CHLORAMINE</b>	CHLM-2510	2-1/2" x 10"	2,500 1,500	0.5 GPM (1.89 LPM) 1 GPM (3.79 LPM)	1	3.5 psid @ 0.5 gpm
	CHLM-2520	2-1/2" x 20"	6,000 3,000	1 GPM (3.79 LPM) 2 GPM (7.57 LPM)	1	4.5 psid @ 1 gpm
	CHLM-4510	4-1/2" x 10"	12,000 7,000 3,500	0.5 GPM (1.89 LPM) 1 GPM (3.79 LPM) 2 GPM (7.57 LPM)	1	7 psid @ 1 gpm
	CHLM-4520	4-1/2" x 20"	24,000 14,000 7,000	1 GPM (3.79 LPM) 2 GPM (7.57 LPM) 4 GPM (15.14 LPM)	1	16 psid @ 1GPM

## Dimensions

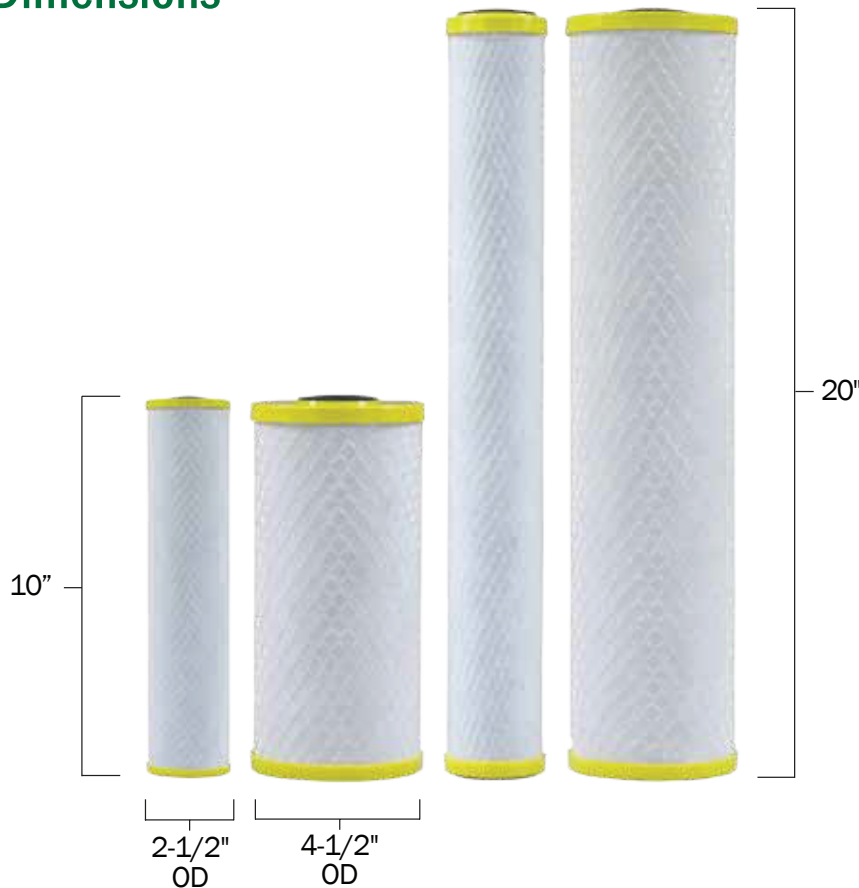

## Case Packs

DIMENSIONS	QUANTITY
2-1/2" x 10"	20
2-1/2" x 20"	20
4-1/2" x 10"	12
4-1/2" x 20"	6

Distributed By:



2299 Ridge Rd., Greenville, SC  
**P:** 888.859.1188 • **F:** 864.284.1819  
[NeoLogicSolutions.com](http://NeoLogicSolutions.com) • [Info@NeoLogicSolutions.com](mailto:Info@NeoLogicSolutions.com)

## Questions?

Ask our Service Representatives at:  
 888.859.1188 Mon.-Fri. 8a-8p,  
 Sat 8:30a-4:30p EST.