



OASIS INTERNATIONAL

AQUA POINTE™

SPORTS BOTTLE FILLER

M8SBF, M12SBF

Suggested Specification

Model M8SBF shall deliver 8.0 gph of 50°F water at 90°F ambient and 80°F inlet water. Model M12SBF shall deliver 12.0 gph of 50°F water at 90°F ambient and 80°F inlet water. Water flow to the bottle filler is by means of an electrically activated solenoid push-button. Shall include filtration for taste, odor and chlorine reduction. Key parts contain Freshield, which utilizes a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discoloration, odors and degradation. Basin shall be designed to eliminate splashing and standing water. Cooling system shall use R-134a refrigerant. Shall comply with ANSI A117.1 and ADA. Shall be listed by Underwriters' Laboratories to U.S. and Canadian standards. Shall comply with ANSI/NSF 61. Model M8SBF delivers 8.0 gallons of chilled drinking water per hour. M12SBF delivers 12.0 gallons of chilled drinking water per hour. These models satisfy CABO/ANSI A117.1.

Standard Features

- > Built-in 100 micron strainer stops particles before they enter the waterway
- > Waterways are Lead-free in Materials & Construction
- > Heavy Duty steel frame
- > High Efficiency cooling tank and coil
- > Refrigerant R-134a
- > Filtration system for taste, odor and chlorine reduction

Finishes

- > Standard cabinet finish: Brushed Stainless Steel
- > Optional finish: Regency Bronze

Installation

- > Prior to roughing, consult with local, state and federal codes for proper mounting height
- > Shipped with complete instructions & wall mounting bracket
- > Removable front panels allow for easy access to filtration and refrigeration unit
- > Does not require a recessed mounting frame, but water supply, electrical and waste drain required.



Options (at additional cost)

- Ultra Violet filtration

ADA Compliant for reach ranges. These models meet guidelines for children's (ages 5 and up) accessibility providing the floor to button height is less than 40 inches and proper clear floor space is provided for frontal approach.

Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of <=0.25%) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953). The Green Filter has been tested to ANSI/NSF standard 42 not by NSF.

Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards.




Oasis International Product
Certified by NSF to
NSF/ANSI Standard 61, G

Model	50° F Drinking Water 90° F Ambient Air Temp*		115 Volts, 60 HZ			Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Compr. HP	Full Load Amps	Rated Watts		
M8SBF	8.0	8.0	1/4	4.8	550	Yes	161 Lbs.
M12SBF	12.0	12.0	1/3	5.4	620	Yes	161 Lbs.

*Industry Standard Rating Condition 80°F inlet water temperature.


Specifications subject to change without notice

MODULAR SPORTS BOTTLE FILLER MODELS
 OASIS® M8SBF, M12SBF

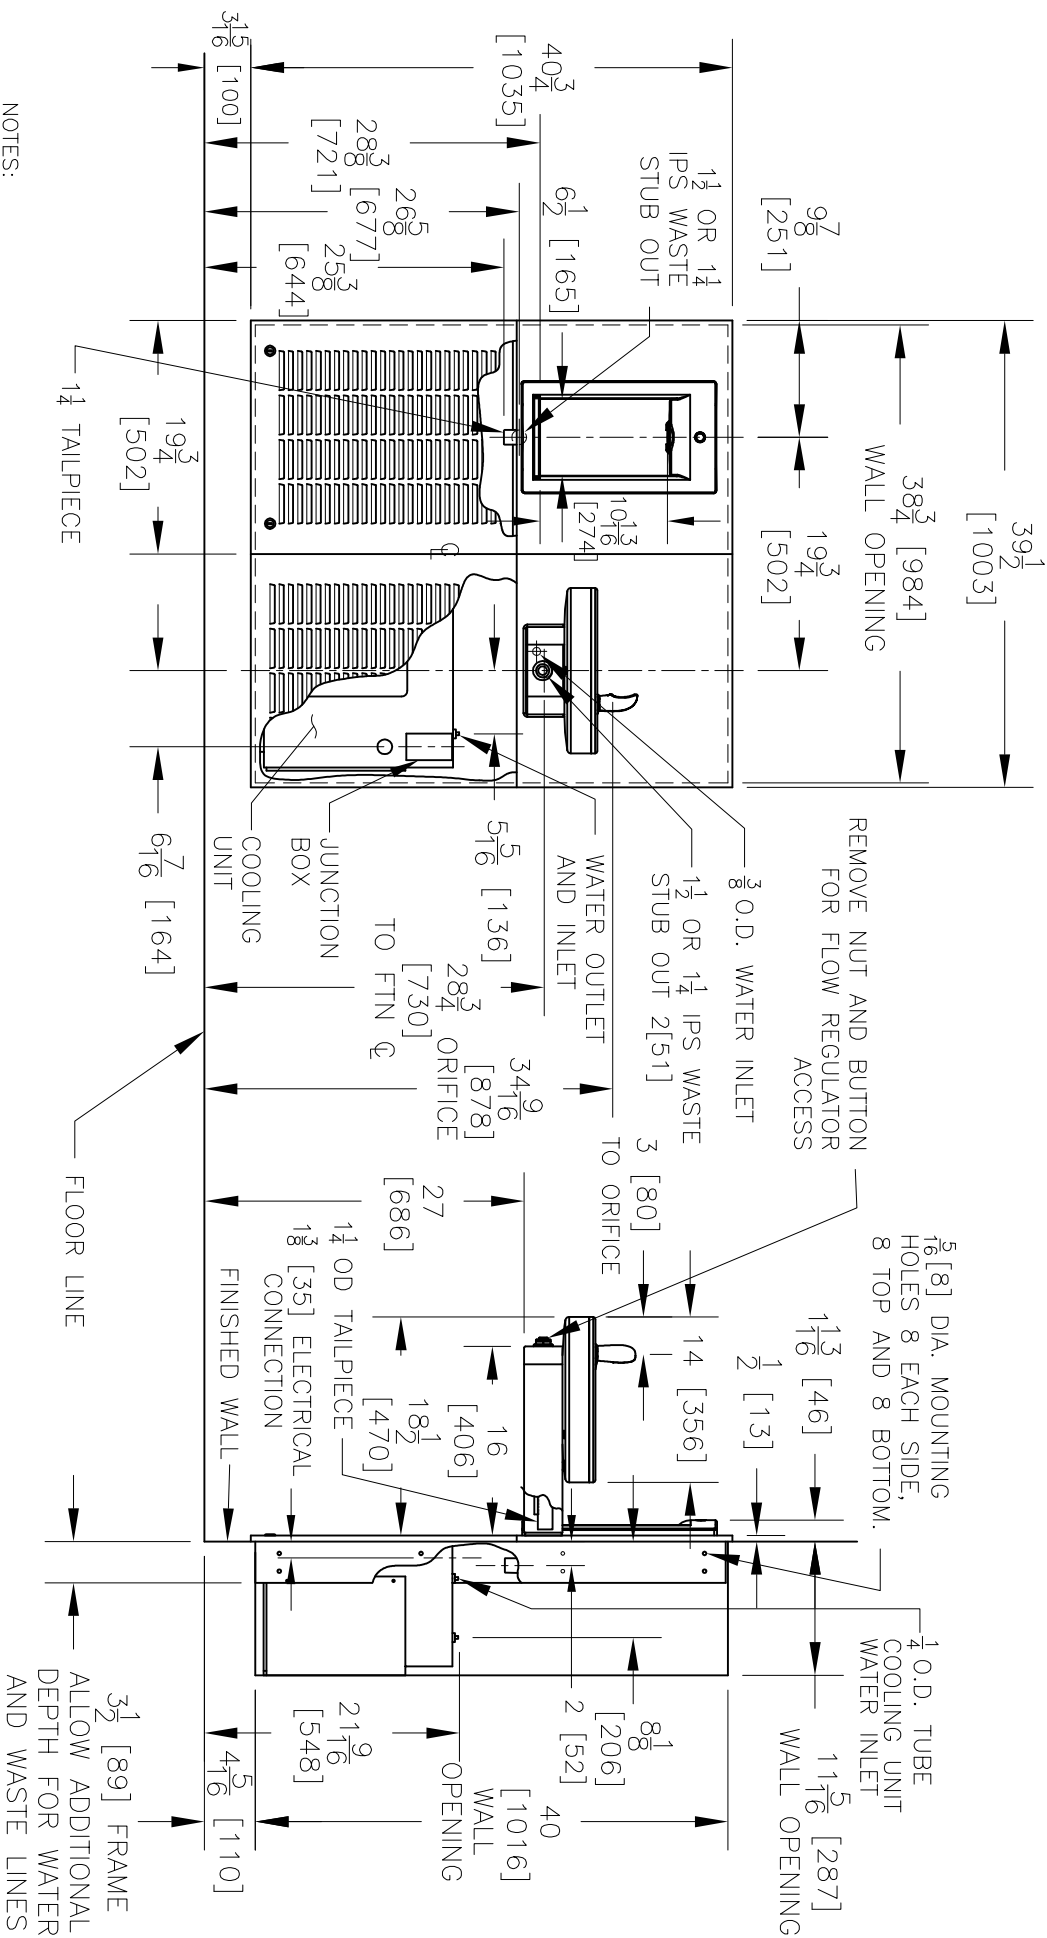

NOTES:

1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
2. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE WASTE LINE NOT PROVIDED. SHORT RADIUS TRAP REQUIRED
3. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.



THIRD ANGLE PROJECTION

ROUGHING-IN AND DIMENSIONAL DRAWING