

# MR-600-1 REPLACEMENT CARTRIDGE

## MINERAL REDUCTION CARTRIDGE

MR-600-1 Replacement Cartridge: EV9627-23



### APPLICATIONS

- ◆ Coffee
- ◆ Espresso
- ◆ Reconstitution
- ◆ Ice
- ◆ Flash and conventional steamers
- ◆ Combi ovens
- ◆ Multiple applications

### FEATURES • BENEFITS

- ◆ Improves equipment life and performance by removing at least 90%+ of all dissolved solids using Reverse Osmosis Separation Technology
- ◆ Sanitary cartridge replacement is simple, quick and clean; internal filter parts are never exposed to handling or contamination
- ◆ A reduction in Total Dissolved Solids (TDS) makes the water less likely to impart undesirable tastes in beverages, sauces, soups and other food products
- ◆ Especially useful on steamers, warmers, steam boilers and other evaporative equipment that are not emptied each day
- ◆ Heating surfaces maintain peak heat transfer efficiency, reducing cycle times and energy consumption
- ◆ Limits limescale buildup, which can cause excessive machine downtime and maintenance costs
- ◆ Mineral reduction cartridge for high TDS waters

### INSTALLATION TIPS

- ◆ Install vertically with cartridge hanging down.
- ◆ Allow 2 1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.
- ◆ Use piping materials suitable for high-purity water after MRS System.
- ◆ Proper pre-treatment is required to control MR cartridge (membrane) scale formation and/or fouling.
- ◆ Raw water hardness in excess of seven (7) grains per gallon should be softened to extend cartridge life.
- ◆ The raw water may contain chlorine or other oxidizers and the use of a carbon pre-filter is recommended.

### OPERATION TIPS

- ◆ Change MR cartridge on a regular preventative maintenance program.
- ◆ Change MR cartridge when output capacity diminishes by 15%, or when output pressure becomes too low.
- ◆ Always flush the MR cartridge at time of installation and cartridge change.
- ◆ Contact Pentair Technical Service for pre-treatment recommendations.
- ◆ Refer to Installation, Operation & Maintenance manual for cartridge flushing and RO startup.


### SIZING

- ◆ Rated Capacity: 600 gallons per day (2,271 Liters per day) Nominal. Water pressure, feedwater quality and temperature will effect actual daily production rate.
- ◆ Service Flow Rate: Dependant on water volume and pressure in storage tank(s), and line size(s) to equipment.

# MRS-600-1 REPLACEMENT CARTRIDGE

EV9627-23

MR-600-1 Replacement Cartridge: EV9627-23

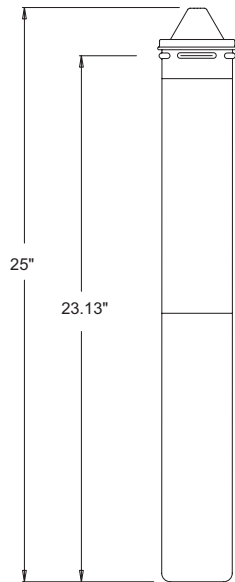

## SPECIFICATIONS

- ◆ **Service Flow Rate**  
Dependant on water volume and pressure in storage tank(s), and line size(s) to equipment.
- ◆ **Rated Capacity**  
600 gallons per day  
(2,271 Liters per day)  
Nominal. Water pressure, feedwater quality and temperature will effect actual daily production rate.
- ◆ **Pressure Requirements**  
40 - 100 psi (2.7 - 6.8 bar), non-shock
- ◆ **Temperature**  
35 - 100°F (2 - 38°C)
- ◆ **Overall Dimensions**  
25" L x 3.25" dia. (63.5 x 8.3 cm)
- ◆ **Inlet TDS**  
1,000 ppm max recommended

## WARRANTY

Everpure water treatment systems by Pentair (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Pentair will provide a copy of the warranty upon request.

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.



**United States** | 1040 Muirfield Drive | Hanover Park, IL 60133 | 800.942.1153 (US Only) 630.307.3000 Main | [cseverpure@pentair.com](mailto:cseverpure@pentair.com) | [foodservice.pentair.com](http://foodservice.pentair.com)

**Australia** | 1-21 Monash Drive | Dandenong South, Vic 3175 | Australia | 011.1300 576 190 Tel | [au.everpure@pentair.com](mailto:au.everpure@pentair.com)

**China** | 21F Cloud 9 Plaza, N0 1118 | Shanghai, 200052 | China | 86.21.3211.4588 Tel | [china.water@pentair.com](mailto:china.water@pentair.com)

**India** | Boulevard, B-9/A, 7th Floor - Tower B Sector 62 | Noida - 201301 | 91.120.419.9444 Tel | [indiacustomer@pentair.com](mailto:indiacustomer@pentair.com)

**Europe** | Pentair Water Belgium BVBA | Industriepark Wolfstee, Toekomstlaan 30, B-2200 Herentals | Belgium | +32.(0).14.283.504 Tel | [sales@everpure-europe.com](mailto:sales@everpure-europe.com)

**Japan** | Japan Inc. | Hashimoto MN Bldg. 7F, | 3-25-1 Hashimoto, Midori-ku, Sagami-hara-shi | Kanagawa 252-0143 | Japan | 81.(0)42.775.3011 Tel | [info@everpure.co.jp](mailto:info@everpure.co.jp)

**Southeast Asia** | 390 Havelock Road, | #04-01 King's Centre | Singapore 169662 | 65.6768.5800 Tel | [cseverpure@pentair.com](mailto:cseverpure@pentair.com)

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

EV9627-23 JE20 ©2020 Pentair. All Rights Reserved.