CTOX Series

Choramine Plus Carbon Block Filter Cartridges





CONTAMINANTS REDUCED

- Asbestos reduction*
- Lindane reduction*
- Atrazine reduction*
- Mercury reduction*
- Chlorine Taste and Odor*
- MTBE reduction*
- Cyst reduction*
- CATION SALESION
- Particulate I reduction*
- Lead reduction^{*}
- VOC reduction*







Tested and certified by NSF International against NSF/ANSI Standard 42 for materials requirements only.

Residential / Commercial Filtration Applications

STANDARD FEATURES

- Manufactured in the USA
- Eco-friendly activated coconut shell carbon filter media to provide exceptional filtration and a high level of CTO, Lead, Chloramine, MTBE, VOC, and Cyst reduction
- Economical and competitive price while providing exceptional performance and high adsorptive capacity
- All materials and components are FDA compliant. Ideal for drinking water applications in residential, food service and commercial settings
- Filters available in standard 2-1/2" and 4-1/2" (BB-style) cartridge diameters
- Polypropylene outer netting and layers provide superior sediment and particulate reduction
- NSF/ANSI standard 42 certified for material requirements only
- Performance claims tested and verified by independent third party laboratory
- California Prop 65 Compliant

PRODUCT SPECIFICATIONS

Filter Media

Coconut shell carbon block

Micron Rating (Nominal)

0.5 micron

Cartridge Length

10" and 20"

Outside Diameters

2-1/2" and 4-1/2" OD

Operating Temperature

40°F - 125°F

Operating Pressure

20 psig - 125 psig


WARNING:

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

^{*}Based on Manufacturer's testing

Ordering Guide (Example: CTOX-4510) **CHLORAMINE, LEAD & NOMINAL MICRON INITIAL PRESSURE** NOMINAL **MAXIMUM PART NUMBER MERCURY, VOC & DIMENSIONS FLOW RATING DROP (PSI) MTBE** CTOX-2510 2-1/2" X 10" 2,500 1 GPM (3.785 LPM) 0.5 < 10 PSI @ 0.75 GPM CT0X-2520 2-1/2" X 20" 5,000 2 GPM (7.57 LPM) 0.5 < 10 PSI @ 1.5 GPM CTOX-4510 4-1/2" X 10" 8,000 3 GPM (11.35 LPM) 0.5 < 7 PSI @ 2.5 GPM CTOX-4520 4-1/2" X 20" 17,000 6 GPM (22.71 LPM) < 6.5 PSI @ 5 GPM 0.5

Dimensions

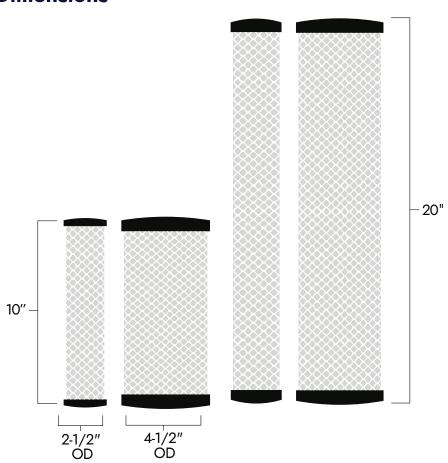

Case Packs

DIMENSIONS	QUANTITY
2-1/2" x 10"	20
2-1/2" x 20"	20
4-1/2" x 10"	12
4-1/2" x 20"	6

Distributed By:

